

Location: \_\_\_\_\_





**TOWN & COUNTRY PLASTICS**  
Customized For Precision

# TC-OI-XL-75

## LARGE CAPACITY PLASTIC OIL INTERCEPTOR

**Specification:** Town & Country Plastics (T&C), TC-OI-XL-75, 75 GPM sand and oil interceptor with 750 lb. oil holding capacity. Interceptor has a limited lifetime warranty and is made in the USA out of seamless, rotationally molded High Density Polyethylene with 3/8" uniform wall thickness. Interceptor designed for above or below ground installation. Interceptor includes an adjustable lid system, external, vented flow control fitting, sample port access, and multiple outlet options. The steel encased composite lid provides a water / gas tight seal and has a minimum of 20,000 lbs. load capacity. The lid is designed in accordance with the loading requirements of AASHTO H20.

**Function:** The interceptor retains sand and sediment. Used in restaurants, kitchens, institutions, auto garages, industrial facilities such as food processing and packaging plants and other types of food processing areas where fat, oil and grease (FOG) drains with the wastewater. Narrow width permits access through doorways and down stairwells. High Density Polyethylene construction ensures a lightweight installation process (two people can move and install it).

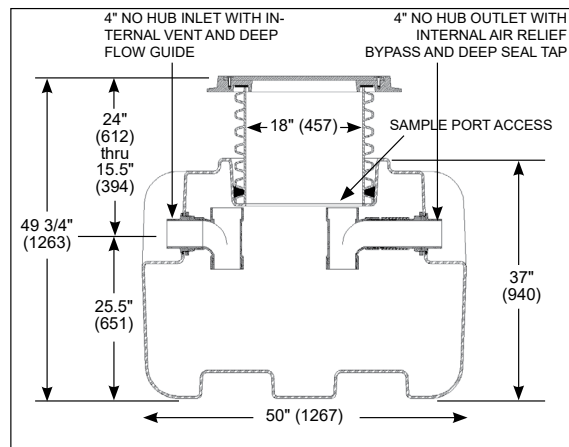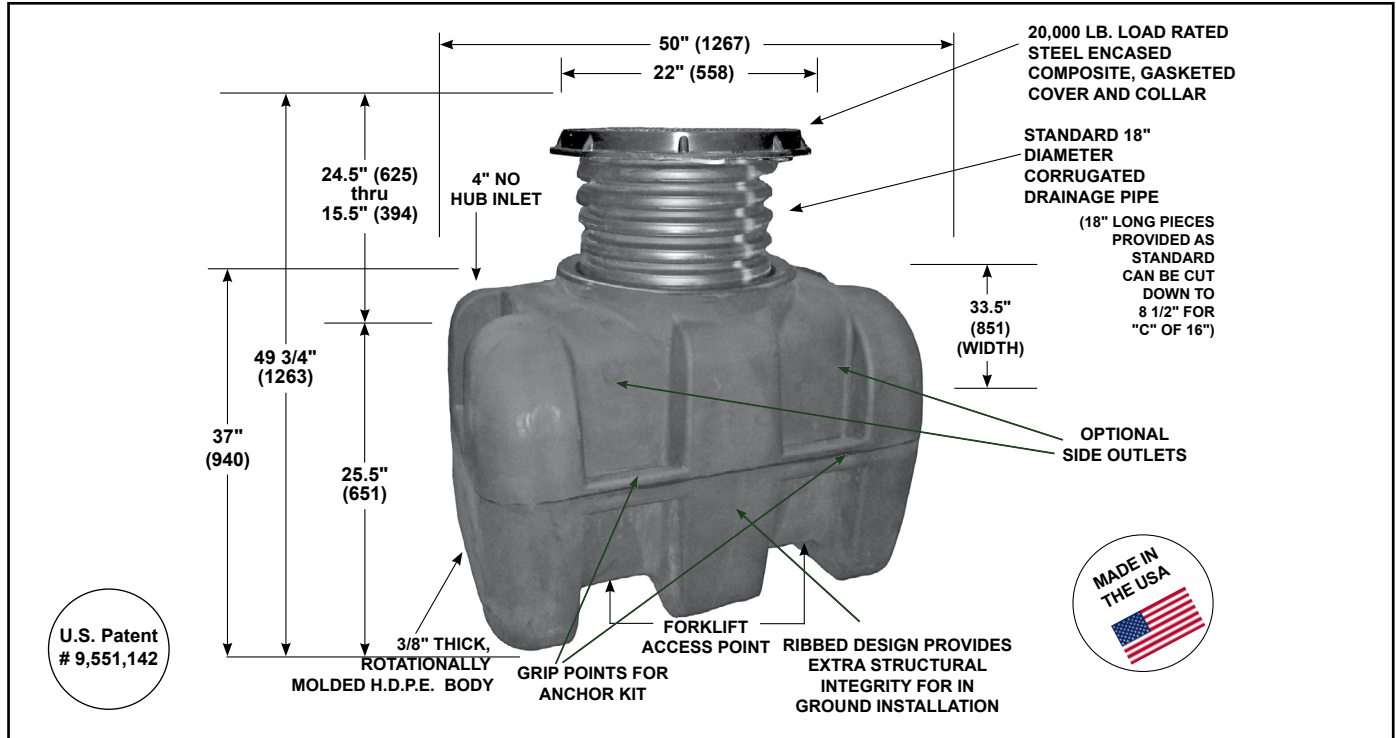

\*Note: The TC-OI-XL-75 does not meet PDI standard if outfitted with an internal flow control (-OP suffix). The PDI standard is only valid for the external flow control fitting.

MODEL NO.	GPM (Flow Rate)	OIL DESIGN CAPACITY (Lbs.)	LIQUID CAPACITY (GAL)	SHIPPING WEIGHT (Lbs.)
TC-OI-XL-75	75	750Lbs. (105GAL)	140	150

**SUFFIX OPTIONAL VARIATIONS**

- AK High water anchor kit (set of two)
- C Lid extension (specify "C" dimension required) (Max. of 72")
- CL Holddown brackets for lid (when installed above ground)
- DCL Direct Connect Lid (lid bolted to top of body)
- DI Ductile iron lid & collar
- EP Enzyme port
- FL-C Membrane clamp kit
- F6 6" No Hub Inlet / Outlet connection
- HLA High level alarm
- LHSI 4" no hub inlet on left hand side
- LHSO 4" no hub outlet on left hand side
- OP Internal flow control\*
- RHSI 4" no hub inlet on right hand side
- RHSO 4" no hub outlet on right hand side
- SB Sediment bucket
- SP External Sample Port (for existing construction. Inlet and Outlet on the same level)
- SP-OF External Sample Port (for new construction. Inlet higher than the outlet).
- T Female threaded connections

Note: for the -DCL option, the floor to top of lid dimension is 39 7/8"

CALIFORNIA PROPOSITION 65 WARNING: This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: \_\_\_\_\_

Page No: \_\_\_\_\_

Section No: \_\_\_\_\_

Contractor: \_\_\_\_\_

Schedule No: \_\_\_\_\_

Purchase Order No: \_\_\_\_\_