

ILSCO®

SOLAR POWER GENERATION PRODUCTS



SOLAR PANEL GROUNDING:

GBL-4DB Tin Plated Direct Burial Copper Lay-in Ground Bushing Lug

- Stainless steel torque screw will not oxidize or corrode in earth or concrete
- Designed for installation of continuous loop copper grounding conductors
- Ground wire range 4-14
- UL 467 Listed and CSA Certified for Grounding and Bonding



GBL-DB

COMBINER BOX:

TA Aluminum Mechanical Lug - Dual Rated

- High strength 6061-T6 aluminum is suitable for either copper or aluminum conductors
- Electro-tin plated for low contact resistance
- Range taking connector sizes from 4-14 to 1000kcmil-500kcmil
- UL Listed and CSA Certified for 600 volts, 90°C



TA

Neutral Bars

- Available in high strength aluminum alloy or copper tubing
- Wide range of conductor sizes
- UL recognized and CSA Certified




CAN



D167



NB

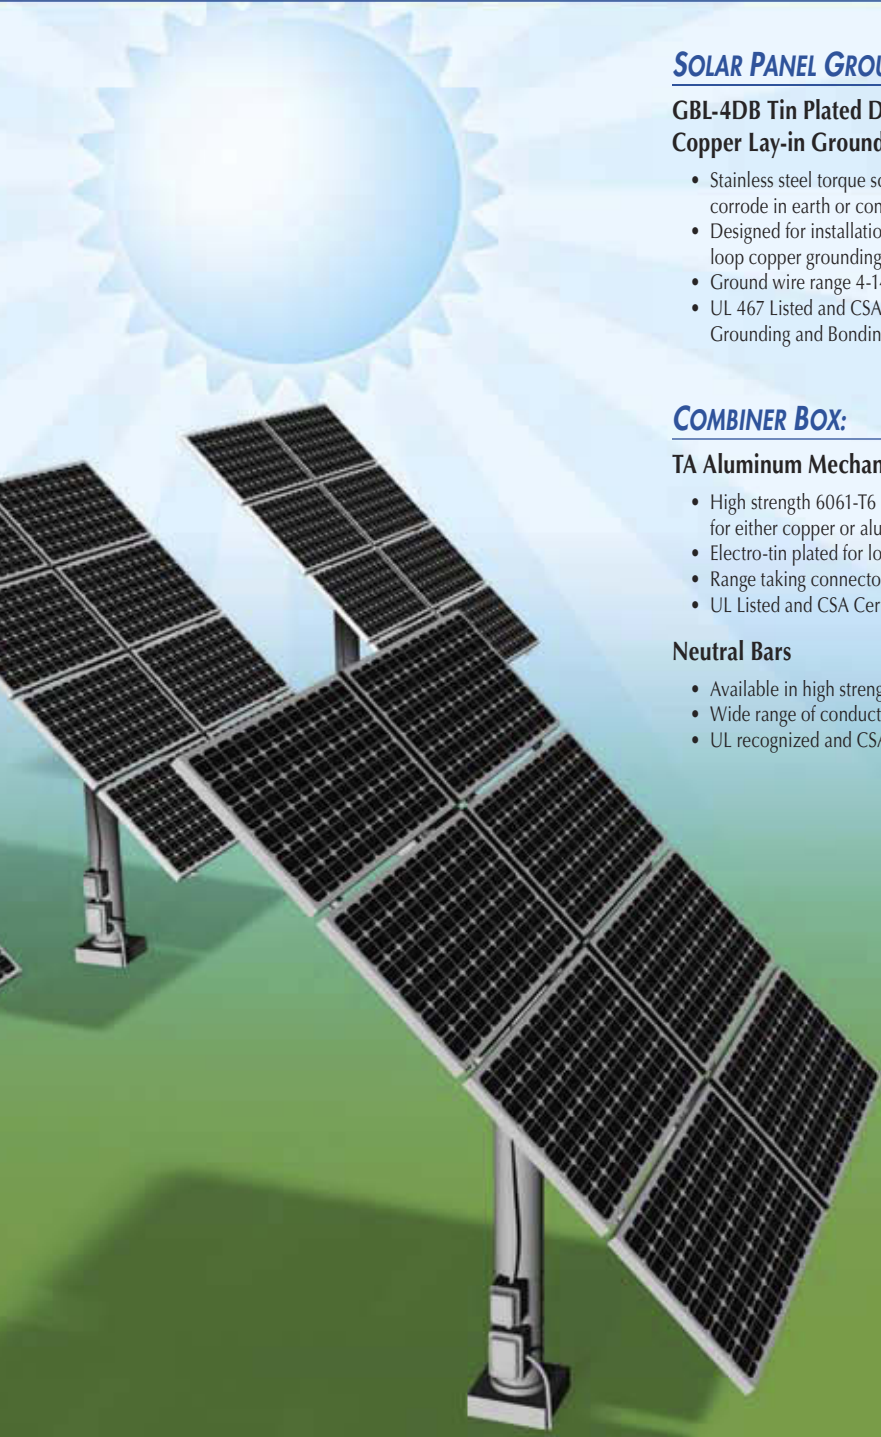

ILSCO CLEAR CHOICE CONNECTORS



ILSCO • 4730 Madison Road, Cincinnati, Ohio 45227, U.S.A. • Phone: (800) 776-9775, (513) 533-6200
Fax: (513) 871-4084 • E-mail: sales@ilsco.com, Web site: www.ilsco.com

ILSCO of Canada Company • 1050 Lakeshore Rd. East, Mississauga, Ontario, L5E 1E4 • Phone: (905) 274-2341, Fax: (905) 274-8763

UTILCO®