

SINGER MODEL 82-PR

Normally Open Pilot Schematic A0667C
Installation, Operation and Maintenance Instructions

DESCRIPTION:

Model 82-PR is a normally open pilot that closes when the control pressure below the diaphragm exceeds the force of the spring.

INSTALLATION:

1. Flush system of all foreign matter before installing the valve.
2. The valve can be installed in any position.
3. Check direction of flow and install the valve accordingly. Refer to enclosed schematic and check the arrow in the valve body.
4. Connect control tubing from the sensing connection of the valve to the point of control. Refer to enclosed schematic.

ADJUSTING PROCEDURE:

1. Loosen the locknut.
2. Turn the adjusting screw clockwise for increased setting, counterclockwise for reduced setting.
3. Lock adjustment by tightening adjusting screw locknut.

SERVICE SUGGESTIONS:

FAILS TO CLOSE

POSSIBLE CAUSE

Spring overset
Foreign material in valve
Diaphragm ruptured

REMEDY

Decrease setting
Dismantle and clean
Replace diaphragm


FAILS TO OPEN

Spring underset
Foreign material in valve

Increase setting
Dismantle and clean

Normally Open Pilot

A0667C

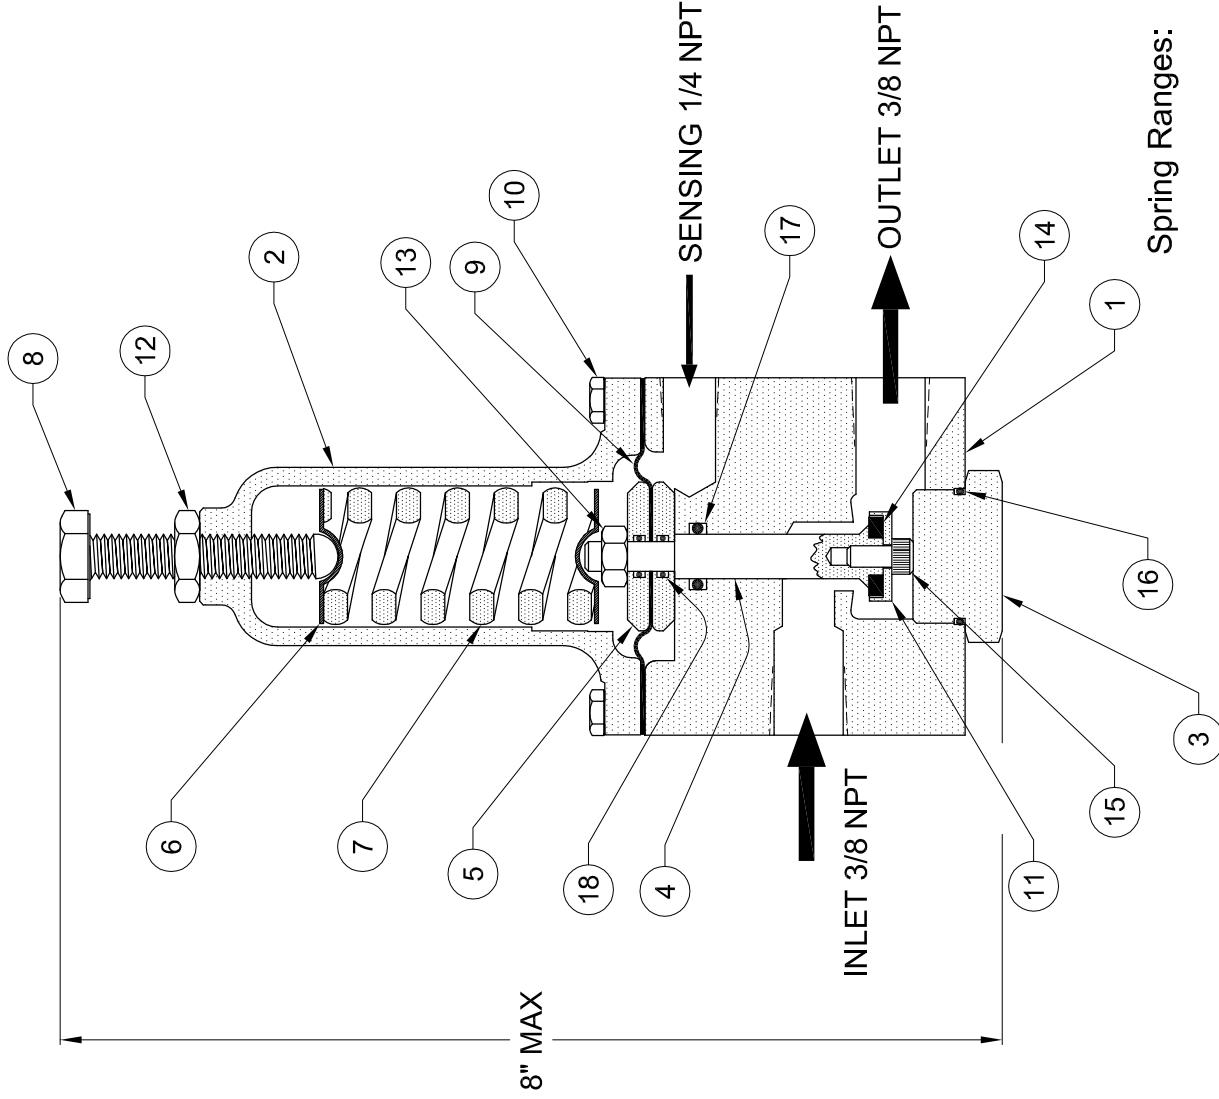

Item	Description	Material
1.	Body	Brass
2.	Spring Casing	Bronze
3.	Bottom Cap	Brass
4.	Inner Valve Stem	Stainless Steel
5.	Clamp Plate (2)	Brass
6.	Spring Step (2)	Stainless Steel
7.	Spring	Steel
8.	Adjusting Screw	Stainless Steel
9.	Diaphragm	Buna-N
10.	Body Capscrew	Stainless Steel
11.	Disc Retainer	Stainless Steel
12.	Locknut	Stainless Steel
13.	Inner Valve Nut	Stainless Steel
14.	Resilient Disc	Buna-N
15.	Inner Valve Screw	Stainless steel
16.	Bottom Cap Seal	Buna-N
17.	Body Seal	Buna-N
18.	Clamp Plate Seal	Buna-N
** 19.	Adjusting Screw Bearing	Stainless Steel



SINGER VALVE
Result-Based Solutions. Globally.™

www.singervalve.com 12850-87th Avenue, Surrey, B.C. V3W 3H9

Drawn By: Steve Bishop

Approved By: Kari Oksanen

Date: March 10, 1999

Drawing: A0667C

Model 82-PR

Spring Ranges:

7 - 50 psi	20 - 80 psi
45 - 200 psi	100 - 300 psi
200 - 500 psi	200 - 600 psi **

** Used in spring range 200 - 600 psi only.
Not shown in drawing.