



## CLOSET USE AND CARE GUIDE

### **MAKING ADJUSTMENTS**

Your Valet closet system is fully adjustable to fit your changing needs. Below are instructions for adjusting various components in your closet system. It is **important that you follow these instructions** to ensure the long-term integrity of your closet.

#### **Shelves:**

Your closet system is fitted with both adjustable and fixed shelves. Typically, one fixed shelf is secured between every set of uprights at approximately mid height. Fixed shelves provide structural integrity to the closet system, and are secured with locking cams. We advise against moving them if possible. If you do need to move a fixed shelf, gently pop out the shelf from the shelf pins and then unscrew the pins. Screw the pins back in at the desired location, as close to center height as possible. Then securely set the shelf back into place. It is **very important that you re-install the fixed shelf** and do not leave the system unsupported. If a blemish is left in the Melamine where your screws were originally set, please call us and we will be happy to mail you adhesive caps to cover any unsightly markings. Your other shelves are fully **adjustable**, and can easily be moved by just removing the 4 support pins and replacing them at the desired height. A pair of pliers may be helpful in removing and replacing the support pins. First, remove the shelves by simply lifting them up about 2 inches and then pulling them out. You may need to tap the shelf gently to secure it back into place when re-installing it. Be sure that the shelf has settled securely onto all four pins.

#### **Hanging Rods:**

Remove all hanging items from the bar. On each end of the bar, you will see oval or circular rod cups. Push up firmly on the rod until it is up about 2". You may then pull the rod out. With circular cups, make sure to push up on the end that does not completely encircle the rod. With the rod removed, pull out the two cups and reset them at the desired height. (A screw driver can be helpful in removing the cups.) Make sure the rods are at the same level before you reinsert the rod. Also, be sure that the rod is firmly in place before you replace your hanging items.

#### **Hinges:**

Please see attached diagram for hinge adjustment instructions.

## **CLEANING**

### **Melamine:**

A damp cloth with a general house hold cleaner such as 409 or glass cleaner will remove most spots. If you should get a tough spot (grease, glue, etc.) a small amount of nail polish remover, lacquer thinner or mineral spirits on a clean cloth should remove the stain. You should follow all instructions and safety precautions as listed on the container when using strong chemicals such as lacquer thinner or mineral spirits. Avoid using any abrasive cleaner.

### **Wood:**

Wiping with a clean dry cloth is best for normal maintenance. For heavy cleaning, standard wood furniture cleaning product can be used successfully without damaging your finish. Do not use solvents such as lacquer thinner or mineral spirits on wood. Immediately wipe off and dry any other liquids such as water or coffee that may come into contact with your wood finish.

### **High Pressure Laminate:**

Many of our counter tops are made with high pressure laminate. The same cleaning instructions indicated for Melamine above will work on high pressure laminate surfaces.

### **Lucite:**

Lucite is best cleaned by gently wiping with a small amount of water dabbed on a soft cloth. Then, pat dry with a lint-free cloth. Lucite is susceptible to scratches and may become clouded over time by chemicals found in commercial glass cleaners. Avoid using any chemical cleaners, such as window cleaning solutions, alcohol, and ammonia.




## **WARRANTY**

**Limited Lifetime Warranty** – Valet warrants to the original purchaser that the goods manufactured and installed by Valet shall be free, under normal use and service, from defects in material or workmanship for as long as you own your home. The warranty does not cover ordinary wear and tear, misuse, repairs, or modifications by unauthorized personnel, of the product. Any claims must be presented to Valet in writing, and Valet shall have a reasonable length of time to validate and remedy such defect by repair and/or replacement in accordance with this warranty.


(Full warranty listed at [www.valetcustom.com](http://www.valetcustom.com) – Products – Warranty)

# Concealed Hinges


Duomatic - Salice

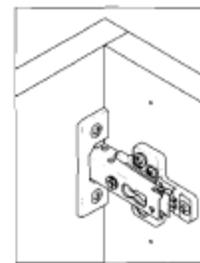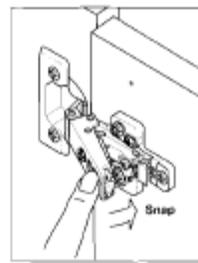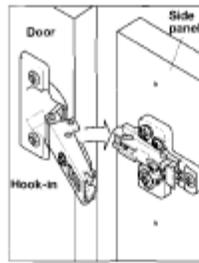


## Adjustments





**Horizontal**  
by screw adjustment  
(5 mm of adjustment)



**In-and-Out**  
by loosening the  
hinge-arm mounting screw  
or via cam adjustment  
(3.3 mm of adjustment)



**Vertical**  
via slots in the mounting  
plate or cam adjustment  
(4 mm of adjustment)

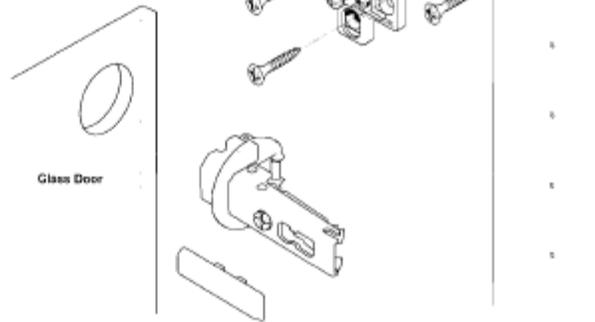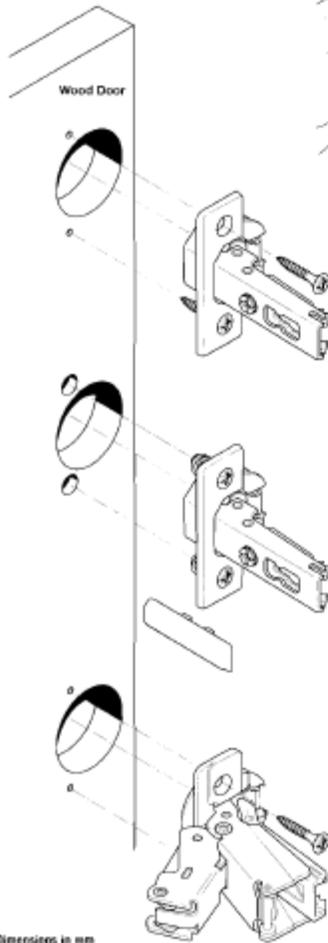

Dimensions in mm  
Inches are approximate