
## MIRAG

## **PRODUCT** INFORMATION

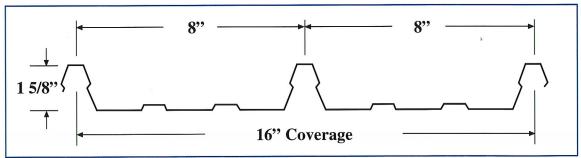

Mirage is a concealed fastener roofing panel with 1 5/8" high ribs spaced 8" on center. Mirage panels can be installed over solid decking or substructural members.

## **PANEL OPTIONS**

Panel Width: 16"

Panel Configurations: 16" Ribbed

Standard Panel Length: Up to 40' Please inquire for longer lengths.

Substrate: Galvalume®


Paint System: Kynar 500<sup>®</sup>

Gauge: 24

Oil canning is a natural occurance in metal panels and is not a cause for panel rejection.

\*Please refer to Mirage Installation Manual (MM160) for Installation Details.



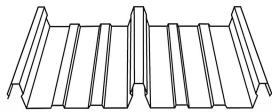

SECTION PROPERTIES												
			TOPI	N COMPRE	SSION	BOTTOM IN COMPRESSION						
Panel Weight Gauge PSF		FY KSI	Ix Se IN.4 IN.		Ma KIP IN.	lx IN.4	Se IN.3	Ma KIP IN.				
26	1.09	80	.0766	.0588	2.1110	.0463	.0549	1.9720				
24	24 1.38 50		.1038 .0808		2.4190	.0654	.0730	2.1840				

- 1. Section properties are calculated in accordance with the 1996 Edition of the Cold Formed Steel Design Manual.
- 2. Ix is for deflection determination.
- 3. Se is for bending.

  4. Ma is the allowable bending moment.
- 5. All values are for one foot of panel width.


1	- 111

MAKO STEEL INC. MAKO STRUCTURES INC.

Corporate Headquarters 2236 Encinitas Blvd., Suite G - Encinitas CA 92024 (800) 383-4932 • Fax: (760) 634-3411

**Eastern Division** 

12412 San Jose Blvd., Suite 102 - Jacksonville, FL 32223 (888) 795-7594 • (904) 260-8946



	ALLOWABLE LOADS (PSF)*																		
POSITIVE WIND LOAD							LIVE LOAD						DEFLECTION (L/180)						
Ga	FY	3'	4'	5'	6'	7'	8'	3'	4'	5'	6'	7'	8'	3'	4'	5'	6'	7'	8'
26	80	243	137	88	61	45	34	183	103	66	46	34	26	375	158	81	47	30	20
24	50	270	152	97	67	50	38	202	114	73	51	37	28	517	218	112	65	41	27

- 1. Allowable uniform loads are based upon panels covering (3) three or more continuous spans.
- 2. Live is the allowable live or snow load.
- 3. Deflection is the allowable load that limits the panel deflection to L/180.
- 4. Weight of the panel has not been deducted from the allowable loads.
- 5. Web crippling has not been checked for the allowable loads shown above.

## TESTING

Class A - Fire Rating UL 2218 - Class 4 Impact Resistance