




# Features

SUMMIT MARINE inc.

1. PATENTED RETRACTING cylinder design keeps our rods clean because the shafts travel inside the cylinder tubes as the lift elevates. Clean rods mean long life for its water approved seals. Larger cylinders allows lower operating pressure, increasing life span of our system. Powder coated finish approved for underwater applications. (U.S. patent number 5,890,835).
2. Stainless Steel Rods remain corrosion and rust free.
3. Brass Wiper Blades; (second line of defense) keeps cylinder rods clean.

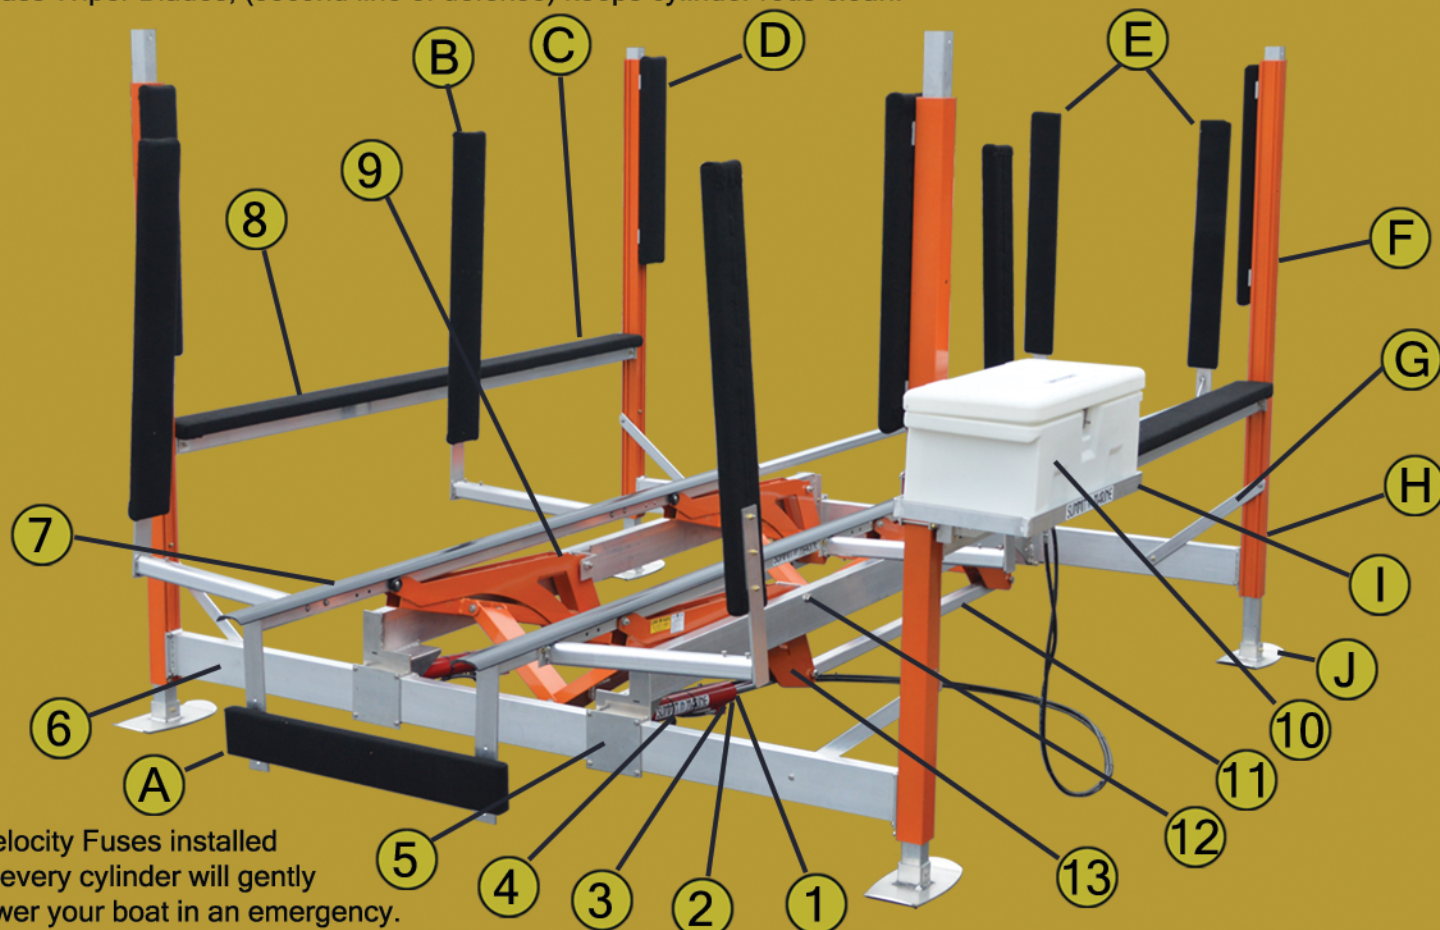

4. Velocity Fuses installed in every cylinder will gently lower your boat in an emergency.
5. Easy Assembly; Main carriage - Prebuilt, hydraulics are ready to lift. 40 fasteners complete the assembly.
6. 6" Beams; Largest in its class. Marine grade aluminum. 78% stronger than 4.5" beams, while only 23% heavier.
7. Full Length Vinyl Bunk Supports; swivel to support your boat best.
8. Optional Carpeted Step Rails, Vertical Guide Posts, Post Protectors, Motor Stop and Bow Stop have CEDAR 2x6 core, durable all weather carpet and stainless steel staples complete the process for long life.
9. Oversized Aluminum Bushings are shouldered between side plates, making it stronger than just welding them alone like the competitors do. Zert fittings allow lubrication for long life.
10. Weather Resistant Poly Box stores hydraulic pump and battery. Screw disconnects are keyed for proper reconnection. Valve block is designed by Summit Marine; Biodegradable oil; Safe 12 volt system.
11. Power Transfer Tube - Transfers power from the hydraulics to all forward hinges. It's '4 wheel drive' for your boat lift. Distributes load evenly to all hinges.
12. Stainless Steel, Aluminum and Brass Hardware - only non corrosive fasteners hold this lift together.
13. Strong, full piece, sandwich style, hinge side plates. Lifting force is not dependent on welded tabs, like its competitors. CNC machined plates means accurate hole locations. Adding up to the strongest hinge in its class.

Options Shown: A-Motor Stop, B-Vertical Guides, C-Step Rails, D-Post Protectors, E-Bow Stop, F-84" Posts, G-Gussets, H-Powdercoat Paint, I-Dock Box Holder, J-Foot Pads 12x12, 24x24, 48x48

Standard: 21' Posts, White Poly Box, Corded Remote Switch, Quick Disconnects, Vinyl Swivel Bunks, 4' Adj. Legs, Foot Pads-8x12..