



Remote Control Unit - Desktop

Part Number: SLE33103 - SLE33106

SPECIFICATION SHEET

5055 Belmont, Beaumont, TX 77707
 Phone +409.842.1717/1.800.648.6158 (Toll Free in the US)
 Fax +409.842.2987
 sales@southernavionics.com



FEATURE	SPECIFICATION
Power	Primary 12VDC @ 0.5 AMPS or back up 12VDC, #10 safety ground connection
Circuit Protection	DC fusing
Working Conditions	-50°C - +70°C; 0-100% relative humidity
Height	11 in. (28cm)
Width	21 in. (53cm)
Depth	13 in. (33cm)

Application:

The addition of the Desktop Remote Control Unit to the Non Directional Beacon Control System involves the installation of a Remote Control Unit at the remote control site, and connection of either RS-485 or RS-232 from the transmitter. Designed for indoor use on a desk or table top. Single and Dual RCUs available. (SLE33106 shown above)

Control Functions:


Transmitter On/Off, Primary Transmitter Select, Reset to Primary, Audio Alarm Enable/Disable, Power

Indicators:




Primary Transmitter (Transmitter 1/Transmitter 2) System Status (Primary, Secondary, Fail), Dual Front Panel Analog Meters for Power, Voltage and Current Indications, 40 character by 4 Line LCD for BITE display

Control Link:

RS-485 or RS-232 from transmitter or daisy chain multiple RCU's maximum length

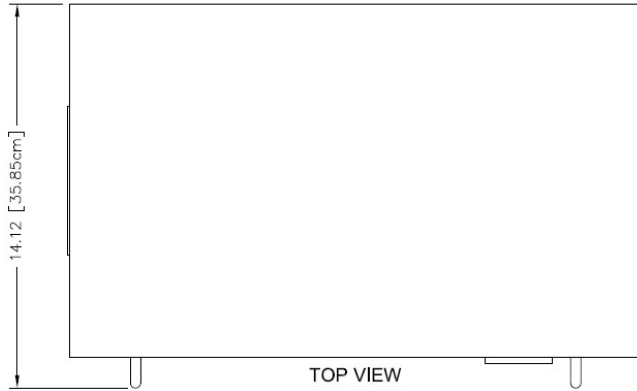

Dual Remote Control Panel

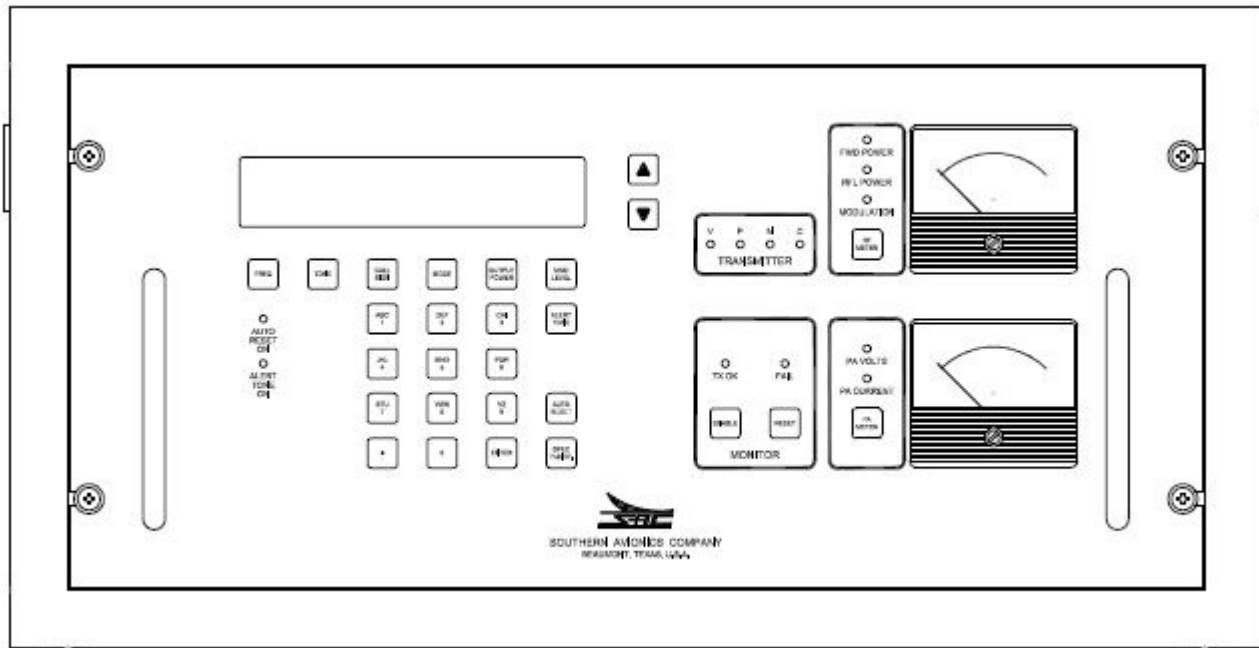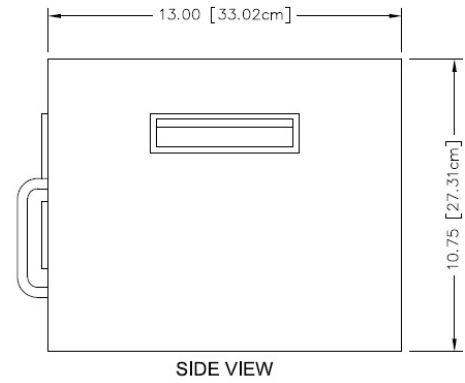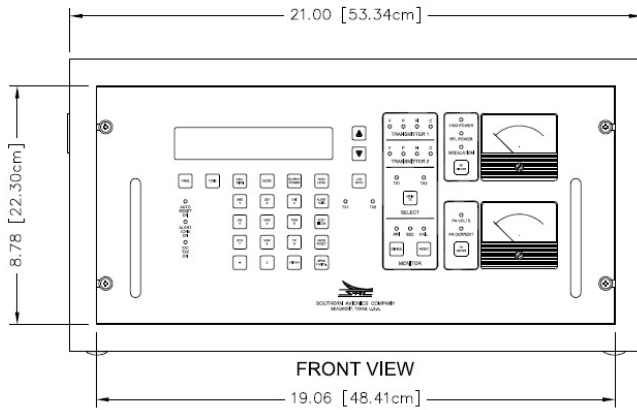

Single Remote Control Panel