




Remote Control Unit

Part Number: SLE33090

SPECIFICATION SHEET

5055 Belmont, Beaumont, TX 77707
 Phone +409.842.1717/1.800.648.6158 (Toll Free in the US)
 Fax +409.842.2987
 sales@southernavionics.com

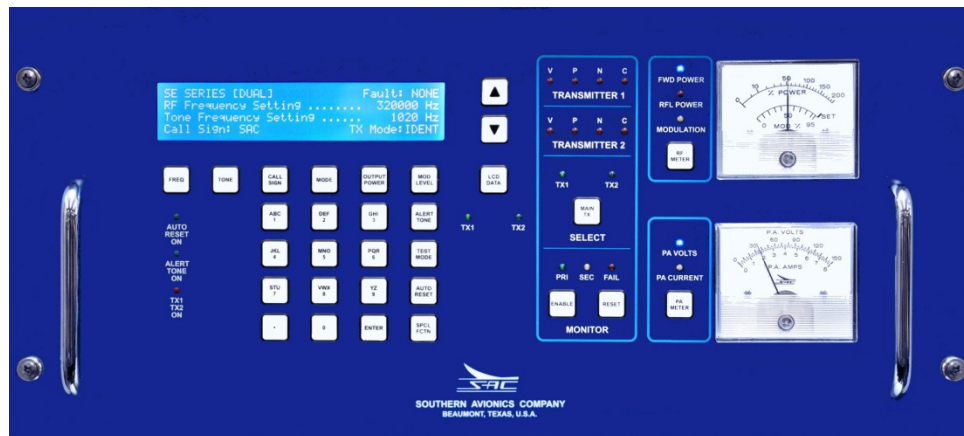

FEATURE	SPECIFICATION
Power	Primary 12VDC @ 0.5 AMPS or back up 12VDC, #10 safety ground connection
Circuit Protection	DC fusing
Working Conditions	-50°C - +70°C; 0-100% relative humidity
Height	8.72 in. (22.1cm)
Width	19 in. (48.26cm)
Depth	8.41 in. (21.4cm)

Application:

The addition of the Remote Control to the Radiobeacon Control System involves the installation of a Remote Radiobeacon Control Unit at the remote control site, and connection of either RS-232 or RS-485 from the transmitter.

Installation Requirements:

Designed for indoor mounting in a standard 19 inch cabinet

Control Functions:

Transmitter On/Off, Primary Transmitter Select, Reset to Primary, Audio Alarm Enable/Disable, Power

Indicators:

Primary Transmitter (Transmitter 1/Transmitter 2) System Status (Primary, Secondary, Fail), Dual Front Panel Analog Meters for Power, Voltage and Current Indications, 40 character by 4 Line LCD for BITE display

Control Link:

RS-485 or RS-232 from transmitter or daisy chain multiple RCU's maximum length