

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-9042

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

FENWAL®

2" Swing Check Valve Component Sheet

P/N: 06-118058-001

FEATURES

- Low Equivalent Length
- For Use with Multiple Cylinder Manifolds and Main/Reserve Systems
- UL Listed

DESCRIPTION

The 2" swing check valve is installed at each container (10 through 350 lb. container size) in a multiple cylinder container system to permit removal of containers while maintaining a closed system. The check valve may also be installed in main and reserve system configurations. Inlet and outlet connections are 2" female NPT. The check valve can be mounted in an upright horizontal orientation or a vertical orientation with the outlet at the top.

OPERATION

In the case of multiple cylinder installations, the check valve prevents back flow from the manifold in the event that the system is discharged when one or more cylinders are disconnected, such as when weighing or during general servicing. In the case of the check valve being used in a main and reserve configuration, it prevents the actuation of the reserve system from manifold pressure.

INSTALLATION

The check valve can be installed between zero and ninety degrees from the horizontal. The check valve must be installed so that the arrow is pointing in the required direction of flow.

ORDERING INFORMATION


The part number for ordering the 2" swing check valve is 06-118213-001.

SPECIFICATIONS

Valve body and cover: Bronze
Service pressure: 600 PSI



DIMENSIONS

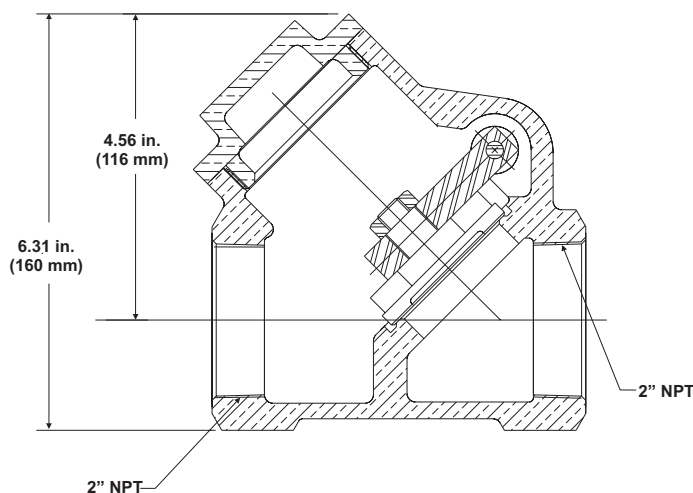

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL®
Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-44-9042

©2005 Kidde-Fenwal, Inc. Printed in U.S.A.