

# Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-5100

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid


## 3/8" Check Valve Component Sheet

# FENWAL®

P/N: 261193

### FEATURES

- For use with UL Listed, ULC Listed and FM Approved Systems

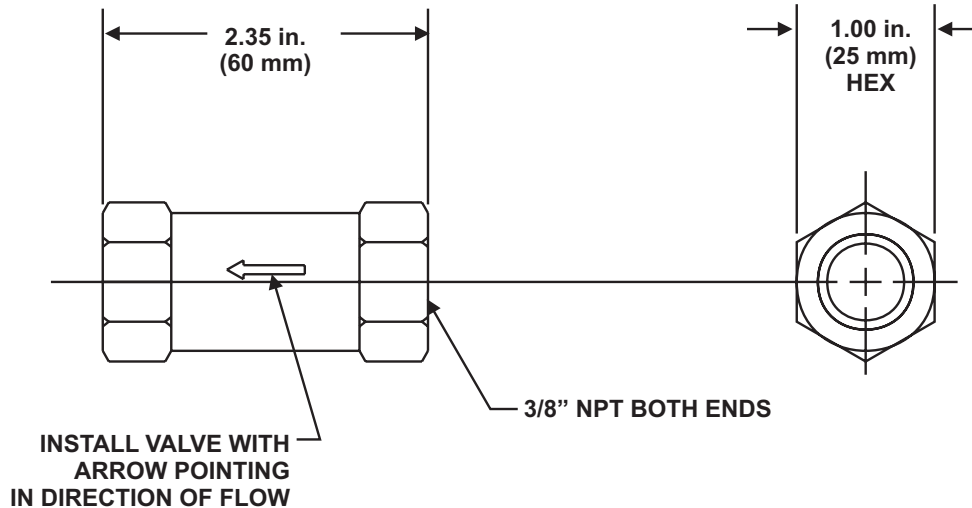

### MATERIALS

- Body: Brass
- Seal: BUNA-N

### TECHNICAL DATA

- Working Pressure: 0 to 5000 PSI (0 to 345 bar)
- Proof Pressure: 10000 PSI (690 bar)
- Cracking Pressure: 2 to 4 PSI (0.14 to 0.28 bar)
- Operating Temperature: -40°F to 250°F (-40°C to 121°C)

Fenwal is a registered trademark of Kidde-Fenwal, Inc.  
3M and Novec are trademarks of 3M.  
All other trademarks are property of their respective owners.



# FENWAL®

**Protection Systems**

KIDDE-FENWAL, INC.  
400 MAIN STREET, ASHLAND, MA 01721  
TEL: (508)881-2000 FAX: (508) 881-8920  
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.  
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000