

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-2140

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid


360 Degree Pendant Nozzle Component Sheet

FENWAL®

P/N: 44-1946XX-XXX

FEATURES

- For use with UL Listed, ULC Listed FM Approvals Systems

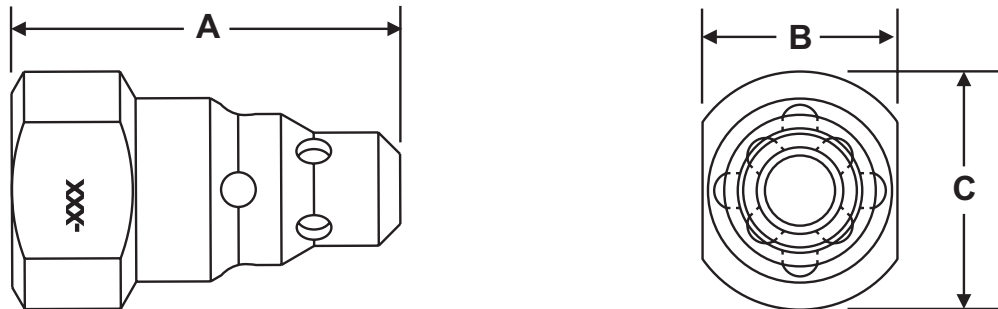

Note: A selection of orifices are available for each nozzle size and make. Consult the Fenwal Engineered Fire Suppression System Design, Installation, Operation and Maintenance Manual for details.

Pipe Size	Dimensions					
	A		B		C	
1/4 in. (6 mm)	1.91 in.	49 mm	1.03 in.	26 mm	0.88 in.	22 mm
3/8 in. (10 mm)	2.03 in.	52 mm	1.00 in.	25 mm	1.19 in.	30 mm
1/2 in. (13 mm)	2.25 in.	57 mm	1.13 in.	29 mm	1.38 in.	35 mm
3/4 in. (19 mm)	2.69 in.	68 mm	1.38 in.	35 mm	1.63 in.	41 mm
1 in. (25 mm)	2.88 in.	73 mm	1.63 in.	41 mm	1.94 in.	49 mm
1 ¼ in. (32 mm)	3.29 in.	83 mm	2.00 in.	51 mm	2.38 in.	60 mm
1 ½ in. (38 mm)	3.63 in.	92 mm	2.25 in.	57 mm	2.69 in.	68 mm
2 in. (51 mm)	4.50 in.	114 mm	3.00 in.	76 mm	3.50 in.	89 mm

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL® Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000