

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-2060

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



Cylinder and Valve Assembly 600 lb. (272.1 kg)
Capacity Component Sheet

FENWAL®

P/N: 44-10060X-001

FEATURES

- For use with UL Listed, ULC Listed FM Approvals Systems

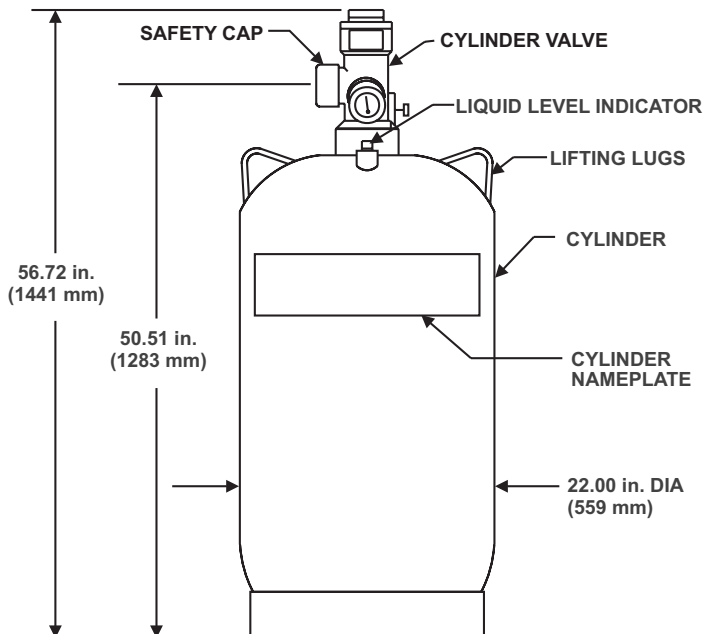

MATERIALS

- Valve Body: Brass
- Cylinder: Steel, Painted Red

ORDERING INFORMATION

Part Number	Description
44-100600-001	STD
44-100601-001	w/LLI

Notes:

1. The safety cap must be installed on the valve outlet at all times, except when the cylinders are connected to the system piping, or being filled. The safety cap must not be removed from its chain.
2. See F-44-2070 for additional information.

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL®

Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein. If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-44-2060

©2005 Kidde-Fenwal, Inc. Printed in U.S.A.