




CV98/CV90/AP-8 Valve Flexible Discharge Bend

Description

The CV98/CV90/AP-8 valve Flexible Discharge Bend (Part No. 427082) is a 5/8 in. (1.59 cm) I.D. extra-heavy flexible hose which connects the valve discharge outlet to the fixed piping or header manifold. The discharge bend has a female 1.3-12-UN-3B thread for connecting to the valve outlet and a male 1/2 in. NPT thread for connecting to the fixed piping or manifold. The discharge bend will withstand a pressure of 9000 psi (621 bar). Its flexible connection allows for easy alignment of multiple cylinder banks to fixed piping. Each bend has a built-in check valve that prevents loss of agent should the system discharge while any cylinder is removed.

Shipping Assembly Part No.	Description
427082	Flexible discharge bend
842430	Washer

Component	Material	Thread Size/Type		Approvals
		Valve End	Manifold End	
5/8 in. Flexible Discharge Bend	SAE 100 R2 Type AT	1 5/16-12-UN-3B Female	1/2 NPT Male	U.S. Coast Guard (162.038/7/0) UL (EX-2968) FM Approved

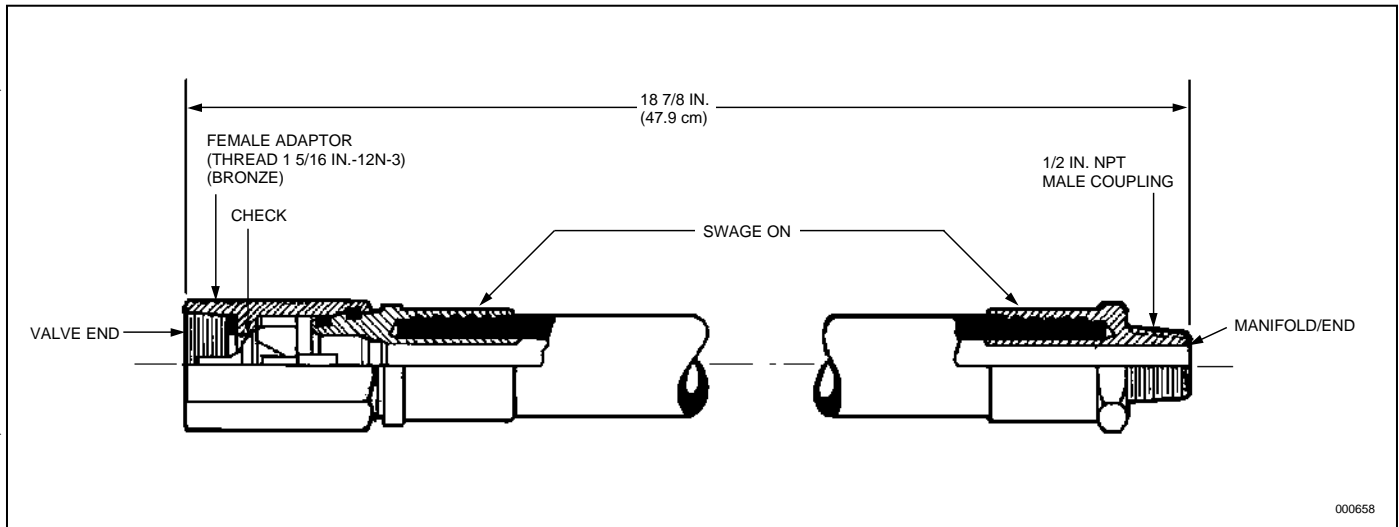

ANSUL is a registered trademark.