

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-8017

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid


Electric Control Head, Stackable Explosion Proof
Component Sheet

FENWAL®

P/N: 486500-01

FEATURES

- For use with UL Listed, ULC Listed and FM Approved Systems

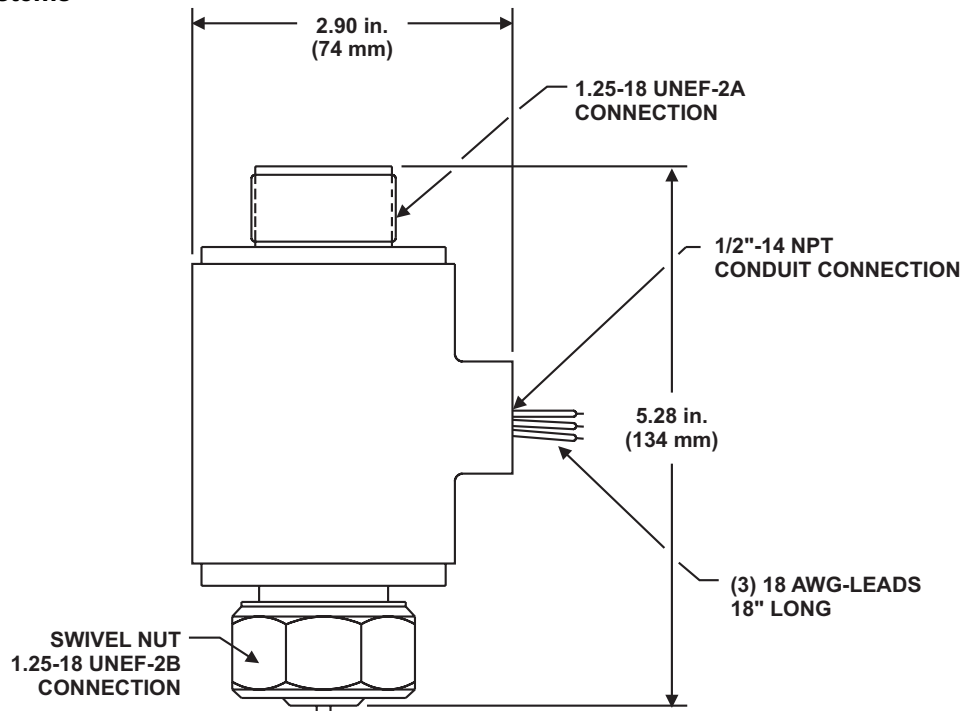

Note: This control head is polarized. Improper wiring will result in operational failure of this device.

TECHNICAL DATA

- Voltage: 24 Vdc
- Current: 0.2 A Continuous Draw

⚠ WARNING

Electric Control Head, P/N 486500-01, is designed for installation directly on Fenwal Engineered Cylinder valves only. This control head must not be installed on any other type of cylinder valve, or stop (directional) valves. Installation of this control head to any other device (e.g., pressure operated control head) will result in failure of the device to operate.

⚠ CAUTION

The Stackable Control Head, P/N 486500-1, cannot be used with the 3" valve cylinders (P/N 45-100600-001, 45-100601-001, 45-100900-001 and 45-100901-001). The stackable control head does not have sufficient force to activate the 3" valve and may result in a system failure. The electric/manual control heads (P/Ns 890181, 890149, 890165 and 81-100000-001) may be used with the 3" valve.

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL®

Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-44-8017

©2005 Kidde-Fenwal, Inc. Printed in U.S.A.