


CO₂ Component Description

Flex Hose - 1/2"

Effective: April 2002

K-81-1080

P/N: 252184

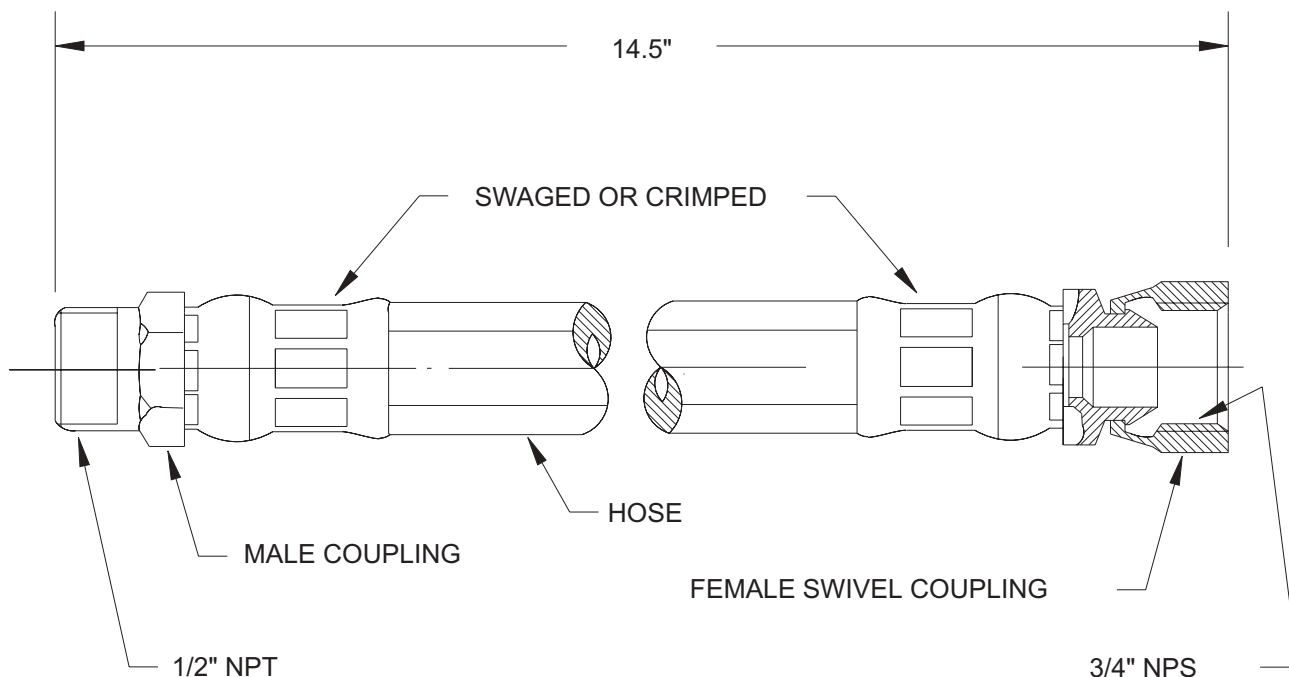

MINIMUM BURST PRESSURE: 6000 PSI (414 BAR)

HYDRO TEST PRESSURE: 1500 PSI (103 BAR)

TEMPERATURE RATING: -40°F TO +250°F (-40°C TO 121°C)

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL INC., Ashland, MA 01721. Telephone: (508) 881-2000

Kidde Fire Systems
400 Main Street
Ashland, MA 01721 USA
Tel: (508) 881-2000
Fax: (508) 881-8920
<http://www.kiddefiresystems.com>