

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-2120


Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

Flexible Discharge Hoses Component Sheet

FENWAL®

FEATURES

- For use with UL Listed, ULC Listed FM Approvals Systems

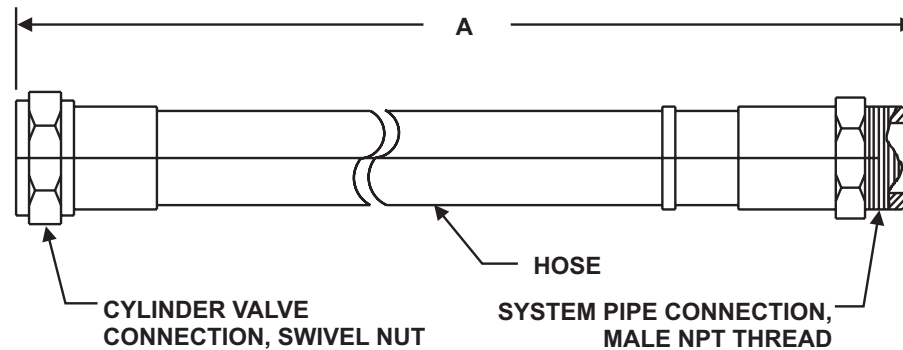

ORDERING INFORMATION

Part Number	Male NPT	Dimension A	Min. Bend Radius
283898	1½ in.	24 in.	10.5 in.
283899	2 in.	31 in.	13.5 in.
283900	2½ in.	48 in.	22.5 in.

MATERIALS

- Hose: Reinforced Rubber Hose
- Fitting: Brass

TECHNICAL DATA

- Minimum Bursting Pressure: 2000 PSI
- Working Pressure: 500 PSI
- * Proof Pressure: 1000 PSI

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL®

Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein.
If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000

F-44-2120

©2005 Kidde-Fenwal, Inc. Printed in U.S.A.