

Fenwal Engineered Fire Suppression System

Effective March 2005

F-44-5050



Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid

Nitrogen Pilot Cylinder, Bracket, and Adapter Component Sheet

FENWAL®

FEATURES

- For use with UL Listed, ULC Listed and FM Approved Systems

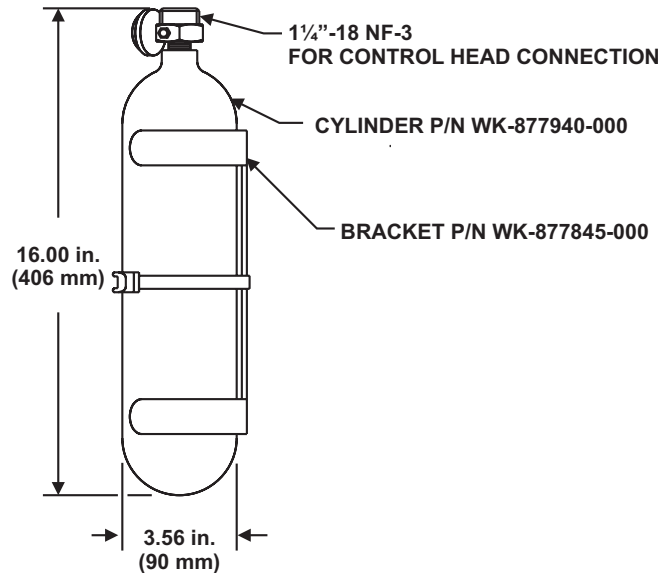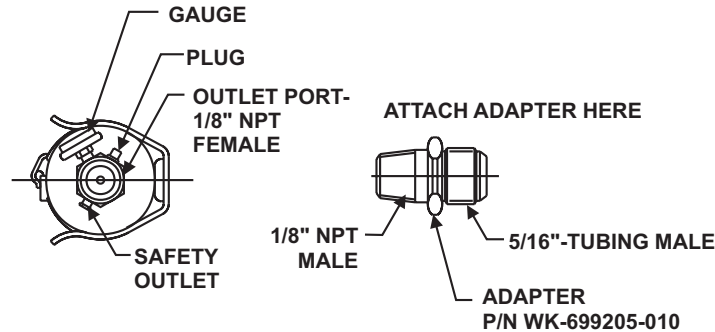

MATERIAL

- Cylinder: Steel, Painted Black
- Valve: Brass
- Bracket: Steel, Painted Black
- Adapter: Brass

SPECIFICATIONS

- Cylinder Capacity: 108 cu. in. (1770 cu. cm)
- Safety Outlet Burst Range: 2650 to 3000 PSI (183 to 207 bars) at 70°F (21°C)
- Nitrogen: NITROGEN-BB-n-411b, Grade A, Type 1 1800 PSI (124 bars) at 70°F (21°C)

Fenwal is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.



FENWAL® Protection Systems

KIDDE-FENWAL, INC.
400 MAIN STREET, ASHLAND, MA 01721
TEL: (508)881-2000 FAX: (508) 881-8920
www.fenwalfire.com

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to perform as described herein. If you need more information on this product, or if you have a question, contact KIDDE-FENWAL, INC., Ashland, MA 01721; Telephone (508) 881-2000