

# Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



A UTC Fire & Security Company

Effective: March 2007


K-45-5070

## 1/4 in. Flexible Actuation Hoses Data Sheet

### FEATURES

- For Use with UL, ULC and FM Approved Systems

P/N: 26498X

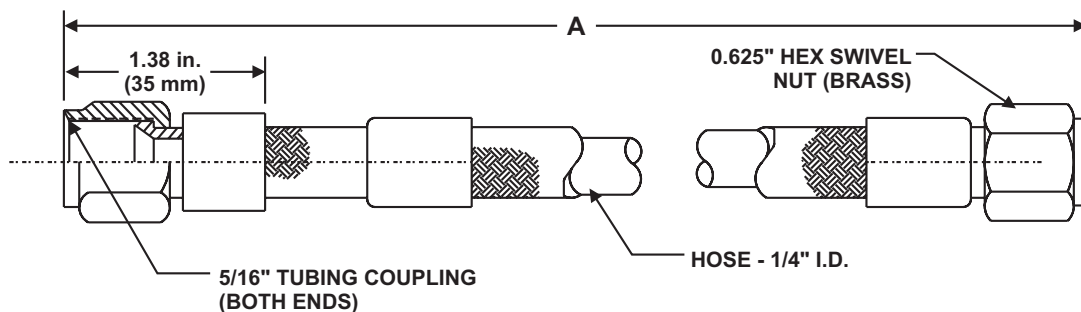

Part Number	Dimension A
264986	30 in. (762 mm)
264987	22 in. (559 mm)

### TECHNICAL DATA

- Minimum Burst Pressure: 12000 PSIG
- Operating Pressure: 3000 PSIG
- Test Pressure: 4500 PSIG
- Minimum Bend Radius: 2-1/2 in.

### MATERIALS

- Hose: Wire Braided, Teflon® Lining (CRES T304)
- Couplings: Brass

Kidde is a registered trademark of Kidde-Fenwal, Inc.  
3M and Novec are trademarks of 3M.  
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.  
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.

Kidde Fire Systems  
A UTC Fire & Security Company  
400 Main Street  
Ashland, MA 01721  
Ph: 508.881.2000  
Fax: 508.881.8920  
[www.kiddefiresystems.com](http://www.kiddefiresystems.com)