

Kidde Engineered Fire Suppression System

Designed for use with 3M™ Novec™ 1230 Fire Protection Fluid



A UTC Fire & Security Company

Effective: March 2007


K-45-5090

1/4 in. Check Valve Data Sheet

FEATURES

- For Use with UL, ULC and FM Approved Systems

P/N: 264985

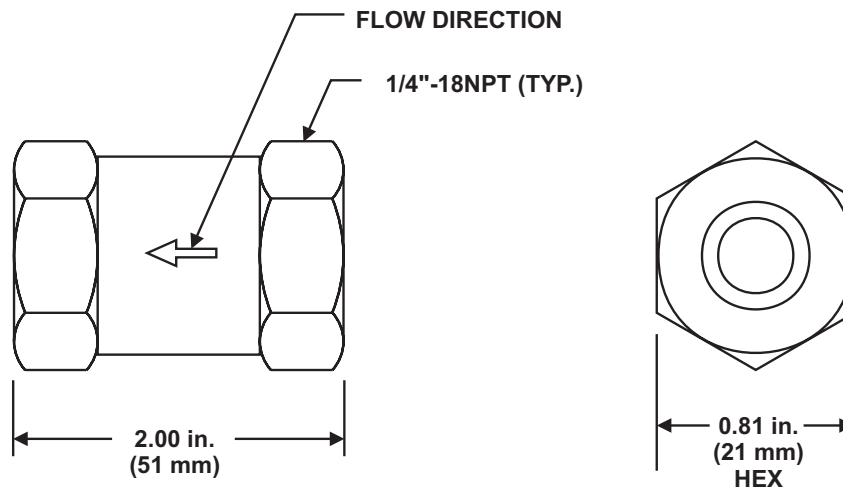

TECHNICAL DATA

- Working Pressure: 0 to 1800 PSI (0 to 124 bar)
- Minimum Bursting Pressure: 5000 PSI (345 bar)

MATERIALS

- Brass

Kidde is a registered trademark of Kidde-Fenwal, Inc.
3M and Novec are trademarks of 3M.
All other trademarks are property of their respective owners.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly.
If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.