

# FM-200<sup>®</sup> Component Description

## Flexible Discharge Hoses




A UTC Fire & Security Company

Effective: April 2007  
K-90-2120

### FEATURES

- For Use with UL Listed, ULC Listed and FM Approved Systems
- See Kidde<sup>®</sup> Manual 90-FM200M-021 for USCG Approval

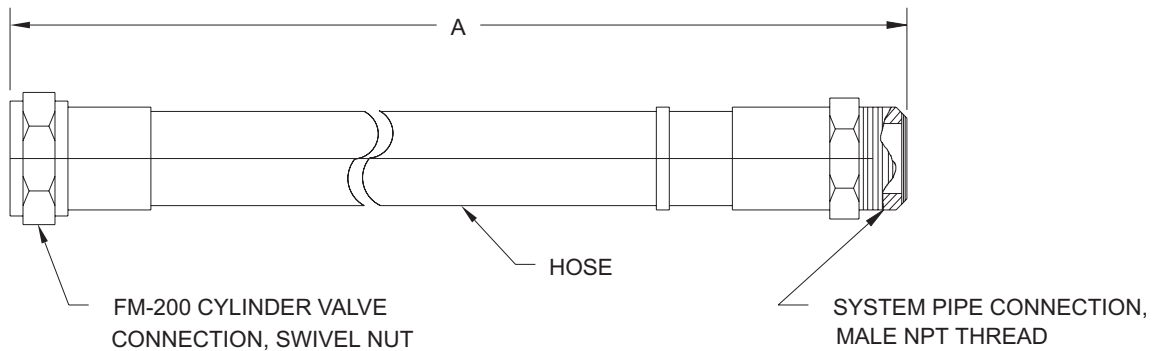

### TECHNICAL DATA

- Minimum Bursting Pressure: 2000 PSI
- Working Pressure: 500 PSI
- Proof Pressure: 1000 PSI

### MATERIALS

- Hose: Reinforced Rubber Hose
- Fitting: Brass

### ORDERING INFORMATION

Part Number	Male NPT	A	Min. Bend Radius
283898	1½	24	10.5
283899	2	31	13.5
283900	2½	48	22.5

**Note:** Dimensions are in inches.

FM-200 is a registered trademark of the Great Lakes Chemical Corporation.

This literature is provided for informational purposes only. KIDDE-FENWAL, INC. assumes no responsibility for the product's suitability for a particular application. The product must be properly applied to work correctly. If you need more information on this product, or if you have a particular problem or question, contact KIDDE-FENWAL, INC., Ashland, MA 01721. Telephone: (508) 881-2000.