




The flexible hook-on system – WORLD PREMIERE

CLIP-O-FLEX

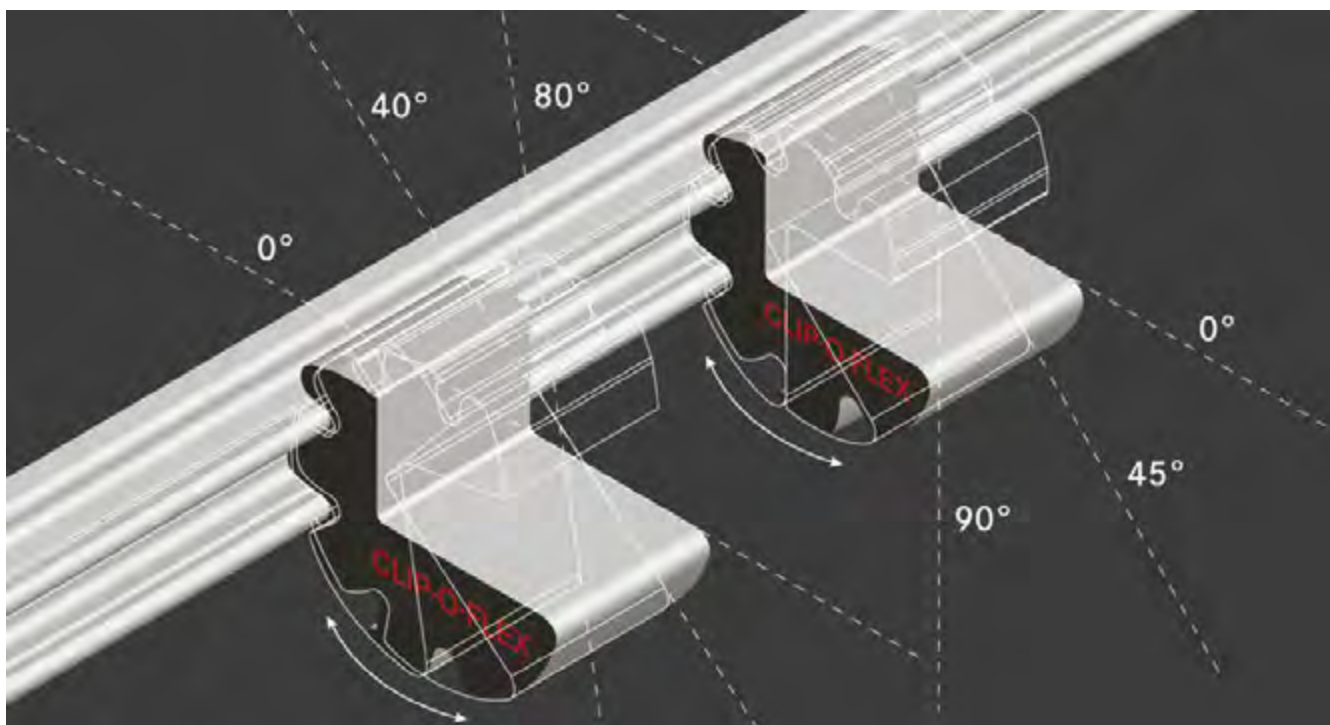

CLIP-O-FLEX **fixes** your work/storage area or your organisation system using only **one clip** yet with the highest level of **horizontal** and **vertical flexibility**!

WHAT IS CLIP-O-FLEX?

- **CLIP-O-FLEX** is the most flexible clip-in system on the market. It enables flexible handling of many different work surfaces, organisation systems with small parts or tool assortments.
- **CLIP-O-FLEX** consists of an ingenious rail profile into which the elements can be clipped at various angles from 0–90°. The profiles can be easily moved within the rails. In this way, **CLIP-O-FLEX** offers maximum horizontal and vertical flexibility.
- The support rail is made of aluminium and is very light and yet durable. Trays, shelves or your existing organisation system can be fixed in the rail and removed again with just one clip-in movement.
- The flexible system enables tools, trays, shelves etc. to always be attached at an ergonomic height and at an ergonomic angle. Workstations can be customised for any requirements in a flash using **CLIP-O-FLEX**. Once a task is complete, tools are tidied away again in the blink of an eye.
- The aluminium support rail required to create a **CLIP-O-FLEX** workstation is available in various lengths. Sheet steel trays equipped with clip-in profiles are also available. The clip-in profiled are also available with pre-drilled holes for rivets or with M5 threaded holes for bolting.
- The **CLIP-O-FLEX** series also comprises pre-assembled products such as workbenches and trolleys with rails mounted around their circumference.
- The assembled trays correspond exactly to the dimensions of our standard ATORN hard foam inserts no. 50537 505-591, which are ideal for use with **CLIP-O-FLEX**.

INCREASED PRODUCTIVITY THANKS TO CLIP-O-FLEX

- Quick access to work equipment
- Flexible and ergonomic workplace design
- Very clear overview
- Quick exchange and replacement
- Fast retooling
- Maximum mobility
- Less walking required
- Keep the work surface free, easy clean-up after the work process (Clean Desk and 5S principle)



The CLIP-O-FLEX profile can be mounted at different angles



Tools can be ergonomically provided, the work surface remains clear.

The tray can be fixed into the rail with only one anchoring in movement and detached again:



Example applications:



Combinable with different materials:



CLIP-O-FLEX Support rails, flat design

Application:

For attachment to the wall, workbench, trolley, workbench structure or perforated metal plate walls As a holder for CLIP-O-FLEX insert profiles and trays.

Execution:

- Made of naturally anodised aluminium
- Pre-drilled, suitable for perforated metal plate walls with centre-to-centre distance 38 mm
- Incl. lateral (left- and right-hand) cover caps
- Total length = nominal length + 5 mm (cover caps)

Advantage:

- Elements can be inserted into the sophisticated rail profile in various angles from 0–90° using the insert profiles and trays no. 50237 091-106
- The profiles can be easily moved sideways within the rails

- A tray, storage compartment or shelf can be inserted into the rail or detached again with only one movement

- Optimum horizontal and vertical flexibility
- Ergonomic and flexible workplace design

Delivery:

Incl. lateral cover caps on left and right

Notes:

For trays to mount on rails, see no. 50237 101-106, for hook-in profiles see no. 50237 091-098/211-213

Technical data:

- Material: Aluminium
- Surface: Anodised



Length (mm)	500	700	750	800	990	1400	1500	2000
Width (mm)	38	38	38	38	38	38	38	38
Depth (mm)	20	20	20	20	20	20	20	20
Number of drill holes (PCS)	2	3	4	4	4	6	6	6
50237... Ident. No.	005	006	007	008	011	014	015	019

Prod. Gr. 586

CLIP-O-FLEX Cover caps

For support rails no. 50237 005-019

Application:

For attaching to the support rails.

Delivery:

Packing unit 2 pieces

Technical data:

- Number of pieces per packet: 2 PCS
- Colour: Black
- Material: Plastic

50237... Ident. No.	096
---------------------	-----

Prod. Gr. 586



CLIP-O-FLEX Plastic rectangular element

For support rails no. 50237 005-019

Application:

For attaching to the support rails for connecting two support rails when used at a 90° angle, for example on a workbench top panel.

Delivery:

Packing unit 2 pieces

50237... | Ident. No. 095

Prod. Gr. 586

Technical data:

- Number of pieces per packet: 2 PCS
- Colour: Black
- Material: Plastic



CLIP-O-FLEX Longitudinal connector

For support rails no. 50237 005-019

Application:

For the connection of support rails.

Execution:

- Can be attached to support rails as an intermediate piece for rail extensions

50237... | Ident. No. 099

Prod. Gr. 586

Technical data:

- Number of pieces per packet: 1 PCS
- Colour: Black
- Material: Plastic



CLIP-O-FLEX Hook-on profiles – angles of 0-90°

For support rails no. 50237 005-257

Application:

For attachment to CLIP-O-FLEX support rails; various materials can also be screwed, riveted or affixed.

Execution:

- Made of aluminium 54 mm wide, naturally oxidised
- With black cover caps, left- and right-hand side

Delivery:

1 pair = 2 pieces

Technical data:

- Material: Aluminium
- Surface: Anodised
- Number of pieces per packet: 2 PCS

Suspension angle	0° 40° 80°	0° 45° 90°	0° 40° 80°
Punched-hole	4 x 4.2 mm	4 x 4.2 mm	4 x M5
Load-carrying capacity (kg)	10	10	10
50237... Ident. No.	091	092	097

Prod. Gr. 586



CLIP-O-FLEX Safety catch

For insert profiles no. 50237 091-098

Application:

For the securing and fixed attachment of insert profiles or trays in the support rail, e.g. during transport with a trolley or a wheeled workbench

Execution:

- Can be placed on the insert profiles in the 0° position

Technical data:

- Colour: Red
- Material: Plastic

50237... | Ident. No. 089

Prod. Gr. 586



CLIP-O-FLEX Trays with MINI hook-on profiles – angles of 0-45°

For CLIP-O-FLEX support rails, no. 50237 005-257

Application:

For insertion in the CLIP-O-FLEX support rails at various angles, for mobile use and for flexible workplace design.

Execution:

- The two mounting profiles are mounted on the wide side

Advantage:

- Always have the right tool at hand when at work
- Tool inserts (no. 50537 505-580) can be placed into trays

Notes:

For CLIP-O-FLEX support rails, see no. 50237 005-019, suitable ATORN hard foam inserts fitted with tool assortments for dimensions W x D 260 x 345 mm, see from no. 50537 505-580

Technical data:

- Material: Sheet steel
- Colour: White aluminium RAL 9006
- Surface: Powder-coated



Example application

Width (mm)	345	520
Depth (mm)	260	345
Height (mm)	30	30
Suspension angle	0° 45°	0° 45°
Load-carrying capacity (kg)	10	10
50237...	Ident. No. 105	106

Prod. Gr. 586

CLIP-O-FLEX Trays with hook-on profiles – angles of 0-90°

For CLIP-O-FLEX support rails, no. 50237 005-257

Application:

For insertion in the CLIP-O-FLEX support rails at various angles, for mobile use and for flexible workplace design.

Execution:

- The two mounting profiles are mounted on the wide side

Advantage:

- Always have the right tool at hand when at work
- Tool inserts (no. 50537 505-580) can be placed into trays

Notes:

For CLIP-O-FLEX support rails, see no. 50237 005-019, suitable ATORN hard foam inserts fitted with tool assortments for dimensions W x D 260 x 345 mm, see from no. 50537 505-580

Technical data:

- Material: Sheet steel
- Colour: White aluminium RAL 9006
- Surface: Powder-coated



Width (mm)	345	345	520	520
Depth (mm)	260	260	345	345
Height (mm)	30	30	30	30
Suspension angle	0° 40° 80°	0° 45° 90°	0° 40° 80°	0° 45° 90°
Load-carrying capacity (kg)	10	10	10	10
50237...	Ident. No. 101	102	103	104

Prod. Gr. 586

CLIP-O-FLEX Handles

For CLIP-O-FLEX trays no. 50237 101-106

Application:

The handles can be used to carry CLIP-O-FLEX trays easily and conveniently

Technical data:

- Number of pieces per packet: 2 PCS
- Material: Plastic

Delivery:

Packing unit 2 pieces



Colour	White	Red	Black
50237...	Ident. No. 280	281	282

Prod. Gr. 586

1563

CLIP-O-FLEX undercounter cabinets with CLIP-O-FLEX hook-on system

Height 800 mm, including 6 CLIP-O-FLEX trays

Application:

Thanks to the flexible and modular CLIP-O-FLEX system, the cabinet can be optimally designed and adapted to the individual work sequences in production, assembly, development, training and further education. Your work/storage area or your organisation system are fixed with one clip and at the same time with the highest level of horizontal and vertical flexibility.

Execution:

- Solidly welded steel sheet construction
- Undercounter cabinet equipped with one door, height 540 mm and 2 drawers, front height 90 mm
- **Ident. No. 150–152:** With fixed support brackets incl. 6 CLIP-O-FLEX trays with hook-in brackets 0/40/80°
- **Ident. No. 154–156:** With convenient pull-out system incl. 6 CLIP-O-FLEX trays with hook-in brackets 0/40/80°

Advantage:

- CLIP-O-FLEX: flexible hook-on system with only one hooking movement
- Ergonomic workplace design thanks to different inclines and can be relocated horizontally
- Quick access to work equipment, very clear overview
- Quick retrofitting, exchange and replacement

- Best mobility, less walking required

Notes:

The spacing between the individual trays in the trolley is max. 52 mm. Please consider the amount of tool protrusion (max. 22 mm) when using trays equipped with ATORN tool inlays (height 30 mm). Trays of tools with greater protrusion must be inserted into the first storage level.

Technical data:

- Draw width (inner dimension): 365 mm
- Drawer depth (inner dimension): 294 mm
- Pullout type: Full extension
- Load-carrying capacity per drawer: 35 kg
- With single pull-out safety brake: No
- With doors: Yes
- Door height: 540 mm
- Central locking: Yes
- Lock type: Cylinder lock
- Material: Sheet steel
- Surface: Powder-coated



Incl. CLIP-O-FLEX trays

Version with support angles

Example application with workbench and mounting system

Version with convenient pull-out system

Version				With support brackets	With support brackets	With pull-out system	With pull-out system
				Left	Right	Left	Right
Door stop				6	6	6	6
Number of cabinets 260 x 345 x 30 mm (PCS)				10	10	10	10
Load-carrying capacity per shelf board (kg)				2	2	2	2
Number of drawers (PCS)				2 x 90 mm	2 x 90 mm	2 x 90 mm	2 x 90 mm
Drawer front height				800	800	800	800
Height (mm)				474	474	474	474
Width (mm)				405	405	405	405
Depth (mm)							
50237...	Body colour	Colour of front	Ident. No.	150	152	154	156
	White aluminium RAL 9006	Jet black RAL 9005		(○)*	(○)*	(○)*	(○)*

Prod. Gr. 586

for colours deliverable without a surcharge, see page 1434



Support struts for workbench construction

In different heights

Application:

For mounting on the workbench panel via bolts vertically and horizontally, sturdy construction. Basic structure for workbench assembly system.

- With slotted perforations on the front and interior side for holding module components

Delivery:

1 pair, incl. assembly materials

Execution:

- Made from sturdy rectangular steel profile 50 x 30 mm

Technical data:

- Material: Sheet steel
- Colour: White aluminium RAL 9006

Height (mm)		470	820	1270	1520
Depth (mm)		30	30	30	30
50239...	Ident. No.	404 ○	408 ○	412 ○	415 ○

Prod. Gr. 504





Perforated metal plate walls

For hooking into support struts

Application:

For accommodating shelves, hook-on rails for easy-view storage bins, binder modules and tool support elements or hooks.

Execution:

- Made from high-quality processed steel sheet, 1.5 mm thick, incl. grid
- Square perforation 10 x 10 mm
- Spacing between hole centres 38 mm, vertically and horizontally
- Hook-in brackets allow simple and screwless mounting between two support struts (also for

wall stands or bases, base frames) or between one support strut and one intermediate strut

Notes:

RASTERPLAN support elements and tool holders for inserting into perforated metal panel walls, see from no. 50638 300

Technical data:

- Punched-hole: 10 x 10 mm
- Material: Sheet steel
- Colour: White aluminium RAL 9006

Width (mm)	1440	1440	1440	1940	1940
Height (mm)	300	650	800	300	650
50239...	Ident. No. 423	426	428	429	430
	○	○	○	(○)*	(○)*

Prod. Gr. 504

CLIP-O-FLEX Roller container with CLIP-O-FLEX hook-on system

Height 778 mm, including 6 CLIP-O-FLEX trays



Application:

Thanks to the flexible and modular CLIP-O-FLEX system, the assembly trolley can be optimally designed and adapted to the individual work sequences in production, assembly, development, training and further education. CLIP-O-FLEX sets your work/storage area or your organisation system with one clip and at the same time gives the highest level of horizontal and vertical flexibility.

Execution:

- Solidly welded sheet steel structure with painted multiplex panel, 30 mm stark
- Workbench panel with CLIP-O-FLEX support rails installed on the top of the housing left, right and at the rear
- Running gear with 2 fixed wheels and 2 steering rollers, including 1 steering roller with stopper
- Central locking with cylinder lock incl. 2 keys
- **Ident. No. 120–121, 160–161:** With fixed support brackets incl. 6 CLIP-O-FLEX trays with hook-in brackets 0/40/80°
- **Ident. No. 122–123, 162–163:** With convenient pull-out system incl. 6 CLIP-O-FLEX trays with hook-in brackets 0/40/80°

Advantage:

- Simply remove the trays from the cabinet and hang on the hook-in rails at the side
- Flexible hook-on system with only one hooking movement
- Ergonomic workplace design thanks to different inclines and can be relocated horizontally
- Quick access to work equipment, very clear overview
- Rapid conversion and replacement, highest possible level of mobility, less walking required, optimum use of space

Notes:

The spacing between the tray base and CLIP-O-FLEX mounting profiles is max. 52 mm. Please consider the amount of tool protrusion (max. 22 mm) when using trays equipped with ATORN tool inlays (height 30 mm). Trays of tools with greater protrusion must be stored in the first storage level.

Technical data:

- Number of cabinets 260 x 345 x 30 mm: 6 PCS
- Height: 778 mm
- Width: 474 mm
- Depth: 405 mm
- Door height: 540 mm
- Load-carrying capacity: 550 kg
- Dynamic load-carrying capacity: 225 kg
- With sliding handle: Yes
- Number of fixed rollers: 2 PCS
- Number of steering rollers: 2 PCS
- With wheel lock: Yes
- Material of the wheel: Solid rubber
- Wheel diameter: 100 mm
- Central locking: Yes
- Lock type: Cylinder lock
- Material of the worktop: Multiplex beech
- Material: Sheet steel
- Surface: Powder-coated



Incl. CLIP-O-FLEX trays

Version with convenient pull-out system

The tray can be fixed into the rail with one hooking movement and detached again

Version with support angles

Version				With support brackets	With pull-out system	With support brackets	With pull-out system
Door stop				Left	Left	Right	Right
50237...	Body colour	Colour of front	Ident. No.				
	White aluminium RAL 9006	Jet black RAL 9005		120 (○)*	122 (○)*	160 (○)*	162 (○)*
50237...	Optional	Optional	Ident. No.	121 (○)*	123 (○)*	161 (○)*	163 (○)*

Prod. Gr. 586

for colours deliverable without a surcharge, see page 1434

CLIP-O-FLEX Assembly trolley with CLIP-O-FLEX hook-on system

Height 958 mm, including 6 or 8 CLIP-O-FLEX trays



Application:

Thanks to the flexible and modular CLIP-O-FLEX system, the assembly trolley can be optimally designed and adapted to the individual work sequences in production, assembly, development, training and further education. CLIP-O-FLEX sets your work/storage area or your organisation system with one clip and at the same time gives the highest level of horizontal and vertical flexibility.

Execution:

- Solidly welded sheet steel structure with painted multiplex panel, 30 mm stark
- Workbench panel with CLIP-O-FLEX support rails installed on the top of the housing left, right and at the rear
- Running gear with 2 fixed wheels and 2 steering rollers, including 1 steering roller with stopper
- Central locking with cylinder lock incl. 2 keys
- **Ident. No. 130–133, 170–173:** With fixed support brackets incl. CLIP-O-FLEX trays with hook-in brackets 0/40/80°
- **Ident. No. 134–137, 174–177:** With convenient pull-out system incl. CLIP-O-FLEX trays with hook-in angles 0/40/80°

Advantage:

- Simply remove the trays from the cabinet and hang on the hook-in rails at the side
- Flexible hook-on system with only one hooking movement
- Ergonomic workplace design thanks to different inclines and can be relocated horizontally

- Quick access to work equipment, very clear overview
- Rapid conversion and replacement, highest possible level of mobility, less walking required, optimum use of space

Notes:

The spacing between the tray base and CLIP-O-FLEX mounting profiles is max. 52 mm. Please consider the amount of tool protrusion (max. 22 mm) when using trays equipped with ATORN tool inlays (height 30 mm). Trays of tools with greater protrusion must be stored in the first storage level.

Technical data:

- Height: 958 mm
- Width: 474 mm
- Depth: 405 mm
- Load-carrying capacity: 550 kg
- Dynamic load-carrying capacity: 225 kg
- With sliding handle: Yes
- Number of fixed rollers: 2 PCS
- Number of steering rollers: 2 PCS
- With wheel lock: Yes
- Material of the wheel: Solid rubber
- Wheel diameter: 100 mm
- Central locking: Yes
- Lock type: Cylinder lock
- Material of the worktop: Multiplex beech
- Material: Sheet steel
- Surface: Powder-coated



Ident. No. 130–131,
134–135, 170–171,
174–175



Ident. No. 132–133,
136–137, 172–173,
176–177



The tray can be fixed into
the rail with one hooking
movement and detached
again



Incl. CLIP-O-FLEX trays



Version with support
angles



Version with convenient
pull-out system

Version				With support brackets	With support brackets	With pull-out system	With pull-out system	With support brackets	With support brackets	With pull-out system	With pull-out system
Door stop				Left	Left	Left	Left	Right	Right	Right	Right
Number of cabinets 260 x 345 x 30 mm (PCS)				8	6	8	6	8	6	8	6
Number of drawers (PCS)				-	2	-	2	-	2	-	2
Drawer front height				-	2 x 90 mm	-	2 x 90 mm	-	2 x 90 mm	-	2 x 90 mm
Draw width (inner dimension) (mm)				-	365	-	365	-	365	-	365
Drawer depth (inner dimension) (mm)				-	294	-	294	-	294	-	294
Pullout type				-	Full extension	-	Full extension	-	Full extension	-	Full extension
Load-carrying capacity per drawer (kg)				-	35	-	35	-	35	-	35
Door height (mm)				720	540	720	540	720	540	720	540
	Body colour	Colour of front									
50237...	White aluminium RAL 9006	Jet black RAL 9005	Ident. No.	130 (○) ⁺	132 (○) ⁺	134 (○) ⁺	136 ●	170 (○) ⁺	172 (○) ⁺	174 (○) ⁺	176 (○) ⁺
50237...	Optional	Optional	Ident. No.	131 (○) ⁺	133 (○) ⁺	135 (○) ⁺	137 (○) ⁺	171 (○) ⁺	173 (○) ⁺	175 (○) ⁺	177 (○) ⁺

Prod. Gr. 586

for colours deliverable without a surcharge, see page 1434

CLIP-O-FLEX Wheeled workbenches with CLIP-O-FLEX hook-on system

Height 958 mm, including 12 or 14 CLIP-O-FLEX trays



Application:

Thanks to the flexible and modular CLIP-O-FLEX system, the wheeled workbench can be optimally designed and adapted to the individual work sequences in production, assembly, development, training and further education. CLIP-O-FLEX sets your work/storage area or your organisation system with one clip and at the same time gives the highest level of horizontal and vertical flexibility.

Execution:

- Solidly welded steel sheet construction
- Workbench panel with CLIP-O-FLEX support rails installed on the left, right and at the rear
- **Ident. No. 140–143:** With fixed support brackets on the inside for CLIP-O-FLEX trays
- **Ident. No. 144–147:** With convenient pull-out system for CLIP-O-FLEX trays

Advantage:

- Simply remove the trays from the cabinet and hang on the hook-in rails at the side
- Flexible hook-on system with only one hooking movement
- Ergonomic workplace design thanks to different inclines and can be relocated horizontally
- Quick access to work equipment, very clear overview
- Rapid conversion and replacement, highest possible level of mobility, less walking required, optimum use of space

Notes:

The spacing between the tray base and CLIP-O-FLEX mounting profiles is max. 52 mm. Please consider the amount of tool protrusion (max. 22 mm) when using trays equipped with ATORN tool inlays (height 30 mm). Trays of tools with greater

protrusion must be stored in the first storage level.

Technical data:

- Working height: 958 mm
- Plate length: 953 mm
- Panel depth: 405 mm
- Board thickness: 30 mm
- Draw width (inner dimension): 365 mm
- Drawer depth (inner dimension): 294 mm
- Pullout type: Full extension
- Load-carrying capacity per drawer: 35 kg
- With single pull-out safety brake: No
- With doors: Yes
- Number of doors: 2 PCS
- With sliding handle: Yes
- On castors: Yes
- Load-carrying capacity: 550 kg
- Dynamic load-carrying capacity: 225 kg
- Number of fixed rollers: 2 PCS
- Number of steering rollers: 2 PCS
- With wheel lock: Yes
- Material of the wheel: Solid rubber
- Wheel diameter: 100 mm
- Central locking: Yes
- Lock type: Cylinder lock
- Material of the worktop: Multiplex beech
- Material: Sheet steel
- Surface: Powder-coated



Ident. No. 140–141,
144–145



Ident. No. 142–143,
146–147



Incl. CLIP-O-FLEX trays



The tray can be fixed into the rail with one hooking movement and detached again



Version with support angles



Version with convenient pull-out system

Version	With support brackets	With support brackets	With pull-out system	With pull-out system
Door height (mm)	540	540/720	540	540/720
Number of cabinets 260 x 345 x 30 mm (PCS)	12	14	12	14
Number of drawers (PCS)	4	2	4	2
Drawer front height	4 x 90 mm	2 x 90 mm	4 x 90 mm	2 x 90 mm
	Body colour	Colour of front		
50237...	White aluminium RAL 9006	Jet black RAL 9005	Ident. No.	
			140 (○)*	142 (○)*
			144 (○)*	146 (○)*
50237...	Optional	Optional	Ident. No.	
			141 (○)*	143 (○)*
			145 (○)*	147 (○)*

Prod. Gr. 586

for colours deliverable without a surcharge, see page 1434



Media columns in practice





HK system trolley – the UNIVERSAL TROLLEY for individual configuration

With extensive equipment elements

Customise your TROLLEY according to your requirements and expectations.

With 10 x 10 mm square perforation in the central or asymmetrical divider and in the two outer walls, we offer a comprehensive range of accessories and flexible options for individually equipping your basic trolley according to your application.

Use the trolley, for example, as a cleaning station, mobile workstation, 5S assembly trolley, LEAN workplace trolley, mobile workshop trolley, material picking trolley, for storage and mobile transport for slings or long, bulky tools, parts, cables, etc.

We would be happy to address any special requirements for additional equipment elements. Please contact us.

Design:

- Robust, welded sheet steel construction
- Outer walls and divider with 10x10 mm square perforation, 38 mm grid spacing and slotted perforation, for attaching tool holders, support elements, hooks and various accessories
- Four integrated handles in outer walls for moving the trolley easily
- Powder-coated surface: Body RAL 7035 light grey, accent roof available in RAL 5010 gentian blue or RAL 7016 anthracite grey.



Example as tool picking trolley – equipped with CLIP-O-FLEX support rails, trays and tool inlays



Example as material/tool trolley – equipped with various accessory parts such as shelves, tool holders and bins

Advantages:

- The UNIVERSAL TROLLEY with numerous equipment options – configure YOUR OWN individual trolley
- With square and slotted perforation in walls, the trolley can be customised to meet your requirements
- Diverse and extensive accessories range for equipping the trolley
- Rapid retrofitting and conversion of accessory parts to cope with new workplace requirements
- Up to 24 RAL colours deliverable on request at no extra charge



Example as clearing station – equipped with paper dispenser, recyclable materials collector and broom set



Example as cleaning station – equipped with cleaning equipment

➡ Further information and advice on request.

Modular trolley

For customised configuration



Application:

basic trolley can be individually equipped with various elements, e.g. as a cleaning trolley, 5S assembly trolley, tool/material provision trolley, for storage and mobile transport for slings or long, bulky tools, parts, cables etc.

Execution:

- sturdy sheet steel construction, fully welded
- outer walls and divider with 10x10 mm square perforations, grid spacing 38 mm, and slotted perforations for attaching support elements, hooks and various accessories
- mobile thanks to 4 steering rollers Ø 125 mm, with trackless light-grey solid rubber tread and thread protection, 2 rollers with wheel blocks
- easy to move with four integrated handles in outer walls
- ref. no. 110: centre divider – usable depth 300/300 mm
- ref. no. 112: asymmetrical divider – usable depth 400/200 mm
- additional colours (at no extra charge) and special equipment requirements deliverable on request

Advantage:

- THE UNIVERSAL TROLLEY with numerous equipment options – configure YOUR OWN individual trolley
- square and slotted perforations in walls enable the trolley to be custom-equipped as per requirements
- versatile and comprehensive accessories range for equipping trolley
- rapid retooling and conversion of accessories for changing workplace requirements

Notes:

For versatile and comprehensive equipment elements see from no. 50240 120-138, RasterPlan tool hooks and support elements see from no. 50638 300, RasterPlan easy-view storage bins see from no. 50638 810-847.

Technical data:

- Load-carrying capacity: 600 kg
- Distance between centre of hole and centre of hole: 38 mm
- Number of steering rollers: 4 PCS
- Wheel diameter: 125 mm
- With wheel lock: Yes
- Material: Sheet steel
- Surface: Powder-coated

Version	Divider centric	Divider centric
Width (mm)	745	745
Depth (mm)	650	650
Height (mm)	1880	1880
Colour of trolley	Light grey RAL 7035	Optional
50240...	Ident. No. 301 (○)*	302 (○)*

Prod. Gr. 559

for colours deliverable without a surcharge, see page 1434



Ident. No. 301



Accent roof

Accessories for HK system trolley no. 50240 301-302

Application:

visual design element for HK system trolley no. 50240 110-113

Technical data:

- Width: 745 mm
- Depth: 650 mm
- Height: 70 mm
- Material: Sheet steel
- Surface: Powder-coated

Colour	Gentian blue RAL 5010	Optional	Anthracite grey RAL 7016
50240...	Ident. No. 320 (○)*	321 (○)*	322 (○)*

Prod. Gr. 559



Ident. No. 322

Hook assortments

Multiple compartments, for 10 x 10 mm square perforation



Application:

Individual holder for tools and parts in perforated metal plate walls with 10 x 10 mm square holes, axis distance 38 mm.

Execution:

- The hooks are simply inserted into the required hole and fixed in place with the red plastic screw

Delivery:

Screw included in scope of delivery



Ident. No. 344



Ident. No. 345



Ident. No. 649

50638...	Hook assortment, 28 pieces in set	Ident. No.	344
50638...	Hook assortment, 18 pieces in set	Ident. No.	345
50638...	Hook assortment, 10 pieces in set	Ident. No.	649

Prod. Gr. 5AC

RasterPlan von Kappes Tool Tower, optionally stationary or mobile with 4 external perforated plates



Application:

For storing and provisioning tools and small parts. Also ideal for use as an info point for centrally displaying information and notifications for customers, visitors, departments and employees.

Execution:

- with 4 external perforated panels, 10x10 mm square perforation, grid spacing 38 mm
- Ident. No. 250–251:** robust frame construction with fixed base
- Ident. No. 252–253:**
 - sturdy frame construction with base and 4 steering rollers
 - with 4 steering rollers, 2 of which with locking devices according to EN 1757-3

Advantage:

- square perforations in walls enable the ToolTower to be custom-equipped as per requirements
- rapid retooling and conversion of accessories for changing workplace requirements
- Ident. No. 252–253:** mobile application possible thanks to steering rollers

Technical data:

- Punched-hole: 10 x 10 mm
- Distance between centre of hole and centre of hole: 38 mm
- With doors: No
- Lockable: No
- Material: Sheet steel
- Colour of perforated panel: Light grey RAL 7035
- Surface: Plastic-coated



Ident. No. 251



Ident. No. 253



Version	Stationary	Mobile	Stationary	Mobile
With doors	No	No	No	No
Width (mm)	700	700	700	700
Depth (mm)	700	700	700	700
Height (mm)	2015	2175	2015	2175
Number of steering rollers	-	4	-	4
Wheel Ø (mm)	-	125	-	125
With wheel lock	No	Yes	No	Yes
Colour of frame	Gentian blue RAL 5010	Gentian blue RAL 5010	Anthracite grey RAL 7016	Anthracite grey RAL 7016
Colour of roof	Gentian blue RAL 5010	Gentian blue RAL 5010	Anthracite grey RAL 7016	Anthracite grey RAL 7016
50240...	Ident. No. 250	Ident. No. 252	Ident. No. 251	Ident. No. 253

Prod. Gr. 5AC

RasterPlan von Kappes Tool Tower, optionally stationary or mobile with 4 external perforated plates, 1 of which is a lockable door



Application:

For storing and provisioning tools and small parts. Also ideal for use as an info point for centrally displaying information and notifications for customers, visitors, departments and employees.

Execution:

- Ident. No. 260–261:**
 - robust frame construction with fixed base
 - with 4 external perforated panels, 10x10 mm square perforation, grid spacing 38 mm, of which 1 panel as lockable door
- Ident. No. 262–263:**
 - sturdy frame construction with base and 4 steering rollers
 - with 4 external perforated panels, 10x10 mm square perforation, grid spacing 38 mm, of which 1 panel as lockable door
 - with 4 steering rollers, 2 of which with locking devices according to EN 1757-3

Advantage:

- square perforations in walls enable the ToolTower to be custom-equipped as per requirements
- rapid retooling and conversion of accessories for changing workplace requirements
- interior space can also be fully utilised – equipping possible with tool holders, shelving, boxes, CLIP-O-FLEX system (support rails and trays)
- Ident. No. 262–263:** mobile application possible thanks to steering rollers

Technical data:

- Punched-hole: 10 x 10 mm
- Distance between centre of hole and centre of hole: 38 mm
- Number of steering rollers: 4
- With doors: Yes
- Lockable: Yes
- Lock type: Cylinder lock
- Material: Sheet steel
- Colour of perforated panel: Light grey RAL 7035
- Surface: Plastic-coated



Ident. No. 260



Version	Stationary	Mobile	Stationary	Mobile
With doors	Yes	Yes	Yes	Yes
Number of shelves	2	2	2	2
Width (mm)	700	700	700	700
Depth (mm)	700	700	700	700
Height (mm)	2015	2175	2015	2175
Wheel Ø (mm)	-	125	-	125
With wheel lock	No	Yes	No	Yes
Colour of frame	Gentian blue RAL 5010	Gentian blue RAL 5010	Anthracite grey RAL 7016	Anthracite grey RAL 7016
Colour of roof	Gentian blue RAL 5010	Gentian blue RAL 5010	Anthracite grey RAL 7016	Anthracite grey RAL 7016
50240...	Ident. No.	260	262	261
		○	○	○

Prod. Gr. 5AC





CONNECT Vario Mobil (CVM) system trolley

Individually equipped with accessories

Design:

- Mobile base trolley, consisting of 2 sectional supports, pushing handle and tray base
- Available in 2 versions depending on application:
 - Version with tray base on both sides – depth 720 mm (360 mm per side)
 - Version with tray base on one side – depth 450 mm
- Tray base load capacity max. 100 kg
- Incl. 4 steering rollers, dia. 125 mm, 2 with locking devices
- Tool-free installation of attachment elements in 50-mm grid
- Perforated sheet metal wall panels 720 x 600 mm (W x D) with 10 mm square holes and 38 mm axis distance

Suitable accessories: Support elements and tool hooks for perforated sheet metal walls can be found from no. 50638 300-651 and Euro-standard stacking containers from no. 50059 110-290

Powder coating: Basic cart/body hanging cabinet/suspended drawer RAL 7035, light grey. Perforated sheet metal panel/front hanging cabinet, hanging file cabinet, trays, shelves available in RAL 5010 gentian blue or RAL 7016 anthracite grey

Delivery: Profile supports, sliding handle and tray base ready-mounted, wheels not mounted.

On request: Additional system trolleys deliverable in different variants and heights of 750 or 1350 mm.

Standard features:



4 steering rollers,
2 with wheel blocks




Roller diameter



Max. load capacity
per shelf



Max. load, base trolley



Sliding handle



Example as a cleaning station, tray bottom on both sides



Base trolley, tray base on one side

Choose your preferred colour (no extra charge) for products with this logo:



RAL 1015	RAL 2004	RAL 3002	RAL 3020	RAL 5010	RAL 5012	RAL 5014	RAL 5015	RAL 6011	RAL 7035	RAL 9010
light ivory	pure orange	carmin red	traffic red	gentian blue	light blue	pigeon blue	sky blue	reseda green	light grey	pure white

Colours may be subject to printing-related differences; the original colours according to RAL are definitive.

**Stacking stool**

With 4 legs, stackable design

**Execution:**

- Stable steel tube frame with plastic skid bases
- With round beechwood seat, diameter 350 mm, multi-bonded, clear varnished

Technical data:

- With foot strut: No
- ESD-capable: No
- Material of the frame: Steel
- Surface: Powder-coated



Ident. No. 001-003, 005-008



Ident. No. 004

Base frame design				Four legs	Four legs	Four legs	Four legs
Min. seat height (mm)				450	500	550	600
Max. seat height (mm)				450	500	550	600
Seat Ø (mm)				350	350	350	350
	Material of the seat part	Base frame colour					
50120...	Beech	Black grey RAL 7021	Ident. No.	001 ○	003 ○	005 ○	007 ○
50120...	Beech	Light grey RAL 7035	Ident. No.	002 ○	004 ○	006 ○	008 ○

Prod. Gr. 504

**Workshop stools**

Four legs

**Execution:**

- Moulded steel strip frame with steel skid bases
- Round beechwood seat, diameter 350 mm in natural varnish

- With foot strut: Yes
- Adjustable in height: No
- ESD-capable: No
- Material of the frame: Steel plate
- Surface: Powder-coated

**Technical data:**

Base frame design				Four legs	Four legs	Four legs
Min. seat height (mm)				500	550	600
Max. seat height (mm)				500	550	600
Seat Ø (mm)				350	350	350
	Material of the seat part	Base frame colour				
50120...	Beech	Black grey RAL 7021	Ident. No.	050 ○	055 ●	060 ●

Prod. Gr. 504

**Stool**

Five legs

**Execution:**

- Height-adjustable thanks to hidden dustproof threaded spindle
- Round beechwood seat, diameter 350 mm in natural varnish
- Base frame made of steel tube with plastic skid base and five feet to prevent tipping

Technical data:

- With foot strut: No
- Adjustable in height: Yes
- ESD-capable: No
- Material of the frame: Steel plate
- Surface: Powder-coated



Base frame design				Five legs
Min. seat height (mm)				450
Max. seat height (mm)				570
Seat Ø (mm)				350
	Material of the seat part	Base frame colour		
50123...	Beech	Black grey RAL 7021	Ident. No.	010 (○)

Prod. Gr. 504

ATORN® beech work stool with a small cross base + safety gas spring for height adjustment

Execution:

- Round beech wood seat with natural-coloured varnish, diameter 350 mm
- Practical ring release of covered safety gas spring for height adjustment
- Small plastic cross base, diameter 440 mm

Technical data:

- Load-carrying capacity: 120 kg
- Adjustable in height: Yes
- ESD-capable: No
- Material of the frame: Steel/plastic



Base frame design			Five legs
Min. seat height (mm)			440
Max. seat height (mm)			630
Seat Ø (mm)			350
	Material of the seat part	Base frame colour	Ident. No.
50123...	Beech	Black	030 O

Prod. Gr. 504

bimos Swivel stool With different pads


Application:

Extremely robust stool offers optimum comfort for industrial and workshop settings thanks to extra-large seat (dia. 400 mm).

- Practical release ring on pneumatic spring for adjusting in any position
- Tall design with height-adjustable footrest
- Ident. No. 070–072:** Extra-large adjustable height range

Execution:

- Stable steel star base, with option for large plastic skid base or double wheels with load-adjusted brake
- All-round cushioned-edge protection for long service life

Technical data:

- Adjustable in height: Yes
- Material of the frame: Steel



Ident. No. 070



Ident. No. 075



Ident. No. 077

Base frame design			Five-star base with glides	Five-star base with rollers	Five-star base with glides
Min. seat height (mm)			460	460	570
Max. seat height (mm)			630	630	850
Seat Ø (mm)			400	400	400
On castors			No	Yes	No
With foot ring			No	No	Yes
	Material of the seat part	Base frame colour	Ident. No.		
50120...	PU foam	Black	070 ●	071 ●	072 ●
50120...	Upholstery	Black	073 ●	074 ●	075 ●
50120...	Faux leather	Black	076 ●	077 ●	078 ●

Prod. Gr. 5AA



Combined rolling/reclining seat

For fast, easy movement between sitting and lying position

Application:

For comfortable working in seated and lying position.

Execution:

- Stable, robust steel tube frame with six large wheels, diameter 63 mm, tilt-proof
- Load capacity up to 150 kg
- Padded seat/reclining surface, easy to clean off dirt
- Dimensions for lying position: L x W x H 1198 x 450 x 130 mm
- Seat height 420 mm, seat 300 x 310 mm
- Colour: black and headrest or seat HAZET blue

Advantage:

- Creeper and creeper seat „in-one“, quick and uncomplicated switch between both functions

Delivery:

Supplied flat-packed, easy assembly

Technical data:

- Load-carrying capacity: 150 kg
- With foot strut: No
- Adjustable seat inclination: No
- Adjustable in height: No
- On castors: Yes
- ESD-capable: No
- Material of the frame: Steel



As rolling/reclining seat

Base frame design			Frame with rollers
Min. seat height (mm)			420
Max. seat height (mm)			420
Seat Ø (mm)			300
	Material of the seat part	Base frame colour	
50120...	Upholstery	Black	Ident. No. 031

Prod. Gr. 506

ErgoPlus perching stool

Folding

Execution:

- Stable structure made from plastic-coated steel profiles, warp-resistant and durable
- Seat and backrest infinitely height-adjustable using a turning knob

Advantage:

- Eases strain on feet and spinal column, supports through relaxed standing

Notes:

Perching stools provide support while the feet remain in contact with the floor. Perching stools must

not be used as seats.

Technical data:

- Base frame design: Two feet
- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Replaceable cushion: No
- Load-carrying capacity: 120 kg
- ESD-capable: No
- Seat/backrest material: Material
- Material of the frame: Steel
- Colour: Black



With black Skai cover



Min. seat height (mm)	550	550	550
Max. seat height (mm)	900	900	900
Base frame colour	Light grey RAL 7035	Jet black RAL 9005	Traffic red RAL 3020
50130...	Ident. No. 012	015	020

Prod. Gr. 504

Work stools and standing aids with rollers and sliders (DIN 68877) Seat with SoftTouch PU foam



Execution:

- Extra-large range of seat heights, infinitely adjustable
- Seat with innovative soft-touch PU foam with wave profile for the best grip and climatic comfort
- Seat with comfortable back support, soft, wipeable, robust and durable
- Base made of sturdy plastic with five feet to prevent tipping
- Ref. no. 104: Height-adjustable foot rest ring

Technical data:

- Load-carrying capacity: 120 kg
- Adjustable seat inclination: No
- Adjustable in height: Yes
- ESD-capable: No
- DIN: 68877
- Material of the frame: Plastic

Advantage:

- Combined solution for sitting and standing - relief for the body and healthy posture through integrated back support



Ident. No. 100



Ident. No. 102



Ident. No. 104

Base frame design				Five-star base with rollers	Five-star base with glides	Five-star base with glides
Min. seat height (mm)				450	510	510
Max. seat height (mm)				650	780	780
Seat Ø (mm)				300	300	300
On castors				Yes	No	No
With foot ring				No	No	Yes
	Material of the seat part	Base frame colour				
50130...	PU foam	Black	Ident. No.	100	102	104

Prod. Gr. 5AA



Chair, stackable

Seat and backrest made of laminated beechwood, 4-legged



Execution:

- Stable steel tube frame with plastic glide runners
- Seat and backrest made of laminated beechwood
- Multi-bonded, clear varnished

- Height-adjustable backrest: No
- Adjustable seat inclination: No
- Replaceable cushion: No
- With foot ring: No
- On castors: No
- ESD-capable: No
- Material of the frame: Steel
- Surface: Powder-coated

Technical data:

- Adjustable in height: No

Base frame design				Steel tube with glides	Steel tube with glides
Min. seat height (mm)				475	475
Max. seat height (mm)				475	475
Base frame colour				Black grey RAL 7021	Light grey RAL 7035
	With cushion	Seat/backrest material			
50120...	No	Beech	Ident. No.	020	021

Prod. Gr. 504



Swivel work chair (DIN 68877)

Seat and backrest made of laminated beechwood, with gliders



Execution:

- Height-adjustable thanks to hidden dustproof threaded spindle
- Laminated beech in natural varnish
- Rigid connection between backrest and seat support
- Base frame made of steel tube with plastic glide runners and five feet to prevent tipping

- Adjustable seat inclination: No
- Replaceable cushion: No
- With armrests: No
- With foot ring: No
- With rising aid: No
- Load-carrying capacity: 120 kg
- On castors: No
- ESD-capable: No
- DIN: 68877
- Material of the frame: Steel
- Base frame colour: Black grey RAL 7021
- Surface: Powder-coated

Technical data:

- Adjustable in height: Yes
- Height-adjustable backrest: No



Base frame design			Five-star base with glides
Min. seat height (mm)			450
Max. seat height (mm)			570
	With cushion	Seat/backrest material	
50125...	No	Beech	Ident. No. 010 (o)*

Prod. Gr. 504

ATORN® Swivel work chairs



Application:

High-quality and robust swivel work chair for universal use in industry, trade, production and workshops.

Execution:

- Infinitely adjustable seat height with Toplift
- Ergonomic lumbar seat for a healthy and comfortable sitting posture.
- Backrest with mesh covering provides air circulation to the back and ergonomic support in any sitting position.
- Permanent contact mechanics, can be locked in any position – welded steel body offers excellent stability and safety.
- Polyamide cross base

Technical data:

- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Adjustable seat inclination: No
- Replaceable cushion: No
- With armrests: No
- With rising aid: No
- Load-carrying capacity: 120 kg
- ESD-capable: No
- Material of the frame: Plastic
- Base frame colour: Black



Ident. No. 001



Ident. No. 002



Ident. No. 003

Base frame design			Five-star base with glides	Five-star base with rollers	Five-star base with glides
Min. seat height (mm)			420	420	590
Max. seat height (mm)			550	550	840
With foot ring			No	No	Yes
On castors			No	Yes	No
	Seat/backrest material	Colour			
50126...	Faux leather/plastic	Black	Ident. No. 001	002	003

Prod. Gr. 504

bimos ISITEC swivel work chair (DIN 68877)

Seat and back made from integral foam



Execution:

- Seat height adjustment with pneumatic spring, Seat incline adjustment to -8°
- Seat and backrest made of robust integral foam
- Height of backrest can be easily adjusted by ratcheting mechanism
- Ref. no. 026: Height-adjustable foot rest ring
- Accessories: Ident. no. 150, arm rests (1 pair)

Advantage:

- Seat and back rest resistant against light acids and alkalis, can be easily wiped and cleaned without problem
- Contact backrest that continuously adjusts to the movements of the upper body or can be easily locked in any position with a control lever
- Lumbar support ensures optimal support to fit natural back curvature
- The light weight of the unit itself and the integrated carry handle make it possible to place the chair conveniently to the side

Technical data:

- Model: ISITEC
- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Adjustable seat inclination: Yes
- Replaceable cushion: No
- With armrests: Optional
- With rising aid: No
- Load-carrying capacity: 120 kg
- ESD-capable: No
- DIN: 68877
- Material of the frame: Plastic
- Base frame colour: Black



Ident. No. 022



Ident. No. 024



Ident. No. 026

Base frame design					Five-star base with glides	Five-star base with rollers	Five-star base with glides
Min. seat height (mm)					430	430	580
Max. seat height (mm)					600	600	850
With foot ring					No	No	Yes
On castors					No	Yes	No
	With cushion	Seat/backrest material	Colour				
50127...	Yes	PU foam	Black	Ident. No.	022	024	026

Prod. Gr. 5AA

Accessories for			50127 022	50127 024	50127 026
50128...	Arm rests	Ident. No.	150	150	150

ALL-IN-ONE Highline swivel work chair (DIN 68877)

With different pads



Application:

An all-rounder with all-inclusive ergonomics - can be tailored to any individual and any workplace situation. With its unique range of setting options to meet the diverse requirements for industrial, workshop, healthcare, research and development applications.

Execution:

- Seat height adjustment with pneumatic spring
- synchronous engineering with weight regulation
- Seat can be adjusted for tilt, height and depth
- Backrest can be adjusted for tilt and height
- Stable, low-profile steel star base, colour black
- Ref. no. 104/114/124: Height-adjustable foot rest ring
- Accessories: Ident. no. 130, arm rests (1 pair), swivelling and adjustable in height, width and depth

Advantage:

- Extra high and large, ergonomically shaped backrest

Technical data:

- Model: ALL-IN-ONE
- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Adjustable seat inclination: Yes
- Replaceable cushion: No
- With armrests: Optional
- With rising aid: No
- Load-carrying capacity: 120 kg
- ESD-capable: No
- DIN: 68877
- Material of the frame: Steel
- Base frame colour: Black



Ident. No. 100



Ident. No. 102



Ident. No. 104



Ident. No. 124
Figures with gliders, PU foam and foot ring



With weight regulation



The chair that can do it all



With synchronous mechanics



Back rest height



Back rest inclination



Seat height



Seat depth



Seat incline

Base frame design					Five-star base with glides	Five-star base with rollers	Five-star base with glides
Min. seat height (mm)					450	450	570
Max. seat height (mm)					600	600	830
With foot ring					No	No	Yes
On castors					No	Yes	No
	With cushion	Seat/backrest material	Colour				
50127...	Yes	Material	Black	Ident. No.	100	102	104
50127...	Yes	Faux leather	Blue	Ident. No.	110	112	114
50127...	Yes	PU foam	Black	Ident. No.	120	122	124

Prod. Gr. 5AA

Accessories for			50127 100	50127 102	50127 104	50127 110	50127 112	50127 114	50127 120
50127...	Arm rests ALL-IN-ONE Highline For chairs no. 50127 100-124	Ident. No.	130	130	130	130	130	130	130

Accessories for			50127 122	50127 124
50127...	Arm rests ALL-IN-ONE Highline For chairs no. 50127 100-124	Ident. No.	130	130

NEON swivel work chair (DIN 68877)

With permanent contact backrest, various pads with unique changing system

**Execution:**

- Seat height adjustment with pneumatic spring
- Backrest height adjustment
- Permanent contact backrest
- Body weight adjustment
- Seat tilt adjustment
- Seat depth adjustment
- Stable aluminium star base in black
- Accessories: Ident. no. 158, arm rests (1 pair)

Advantage:

- Extra-large, ergonomically-shaped backrest
- Consisting of two elements: Chair element with frame and mechanics and cushion element
- Cushions can be replaced effortlessly thanks to the 1 + 1 system; simply slot in the cushion elements and click to fix

Delivery:

Without cushion

Notes:

Cushion must be ordered separately, for various cushions, see no. 50128 162-169

Technical data:

- Model: NEON
- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Adjustable seat inclination: Yes
- Replaceable cushion: Yes
- With armrests: Optional
- With foot ring: No
- Load-carrying capacity: 120 kg
- ESD-capable: No
- DIN: 68877
- Material of the frame: Aluminium
- Base frame colour: Black



Ident. No. 151-152, 154, 156



Ident. No. 153



Ident. No. 155



Unique interchangeable padding system



The permanent contact backrest follows the person's movements and ensures that the back is always ideally supported. The weight regulation system ensures that the back rest resistance and body weight are always balanced. The permanent contact back rest is particularly suitable for work that requires a stance of predominantly bending forward with a short distance between the workpiece and the eyes (e.g. in fine mechanics or in a laboratory).

Base frame design				Five-star base with glides	Five-star base with rollers	Five-star base with glides
Min. seat height (mm)				450	450	590
Max. seat height (mm)				620	620	870
With rising aid				No	No	Yes
On castors				No	Yes	No
50128...	With grey flex band	With cushion	Ident. No.	151	152	153
	No	No		•	•	•
50128...	With green flex band	With cushion	Ident. No.	154	155	156
	No	No		•	•	•

Prod. Gr. 5AA

Accessories for			50128 151	50128 152	50128 153	50128 154	50128 155	50128 156
50128...	Arm rest NEON For chairs no. 50128151-156	Ident. No.	158	158	158	158	158	158
			•	•	•	•	•	•

ESD-Basic swivel work chair (DIN 68877)

With different pads



Application:

The ESD-compliant work chair makes a key contribution to reliable ESD protection measures at electronic workstations. An optimum choice of materials and joining technologies mean that BIMOS ESD Basic chairs are protected from electrostatic charge. It also ensures that any charge carried by the user is reliably transferred to the conductive base.

Execution:

- Infinitely-variable and user-friendly seat height adjustment via pneumatic pressure spring with dust protection
- Ref. no. 143/146/149: Height-adjustable foot rest ring
- ESD-capable according to DIN EN 61340-5-1

Advantage:

- Ergonomically-shaped permanent-contact backrests, height-adjustable

Technical data:

- Model: ESD-Basic
- Adjustable in height: Yes
- Height-adjustable backrest: Yes
- Adjustable seat inclination: No
- Replaceable cushion: No
- With armrests: Optional
- With rising aid: No
- Load-carrying capacity: 120 kg
- ESD-capable: Yes
- DIN: 68877
- Material of the frame: Aluminium
- Gloss level: Polished



Ident. No. 145



Ident. No. 148



Ident. No. 149

Base frame design				Five-star base with rollers	Five-star base with glides
Min. seat height (mm)				460	620
Max. seat height (mm)				620	870
With foot ring				No	Yes
On castors				Yes	No
	With cushion	Seat/backrest material	Colour		
50128...	Yes	Material	Black	Ident. No. 142	Ident. No. 143
50128...	Yes	Material	Blue	Ident. No. 145	Ident. No. 146
50128...	Yes	Faux leather	Black	Ident. No. 148	Ident. No. 149

Prod. Gr. 5AA

Accessories for			50128 142	50128 143	50128 145	50128 146	50128 148	50128 149
50128...	Arm rests	Ident. No.	150	150	150	150	150	150

Anti-slip adhesive tapes

With rough surface

Application:

Versatile use and easy to glue, e.g. on stair steps, ladders, ramps, paths, entry areas, loading zones or in front of machines, for use inside and outside.

Execution:

- Self-adhesive, anti-slip adhesive tape with rough surface made of aluminium oxides on a polymer backing
- Slip prevention R13 in accordance with EN 13552
- Temperature-resistant from -20 °C to +60 °C and UV-resistant
- 1 roll width 50 mm, length per roll 18.3 m

Advantage:

- Suitable for fast marking of hazardous areas
- Increases slip safety on slippery surfaces

Technical data:

- Material: Aluminium oxide/polymer
- Surface structure: Coarse
- Suitable for wet areas: No
- Antistatic: No
- Non-slip: Yes
- Compliant with REACH: Yes



Example application

		Colour		Black	Black Yellow	Red White	Yellow	Transparent
Length (m)	Width (mm)	Min. temperature resistance (°C)	Max. temperature resistance (°C)	50225... Ident. No.	50225... Ident. No.	50225... Ident. No.	50225... Ident. No.	50225... Ident. No.
18.3	50	-20	60	130	132	134	136	138

Prod. Gr. 5AD

Anti-slip mats

With textured structure

Application:

The mats can be used for numerous purposes, e.g. as drawer inserts or tool trays for workbenches, cabinets, tool boxes and tool trolleys, on machines as tool trays, also suitable in vehicle luggage compartments as loading and transport protection and as a work surface.

Execution:

- Reinforced fabric mat with textured structure made of adhesive plastic
- Lightweight, can be cut to size, highly resistant to tearing and extremely durable
- Washable at 40°C

Advantage:

- The mat remains firmly in place without being glued, even on rough or sloping surfaces

Technical data:

- Material: Rubber
- Surface structure: Open burling
- Suitable for wet areas: Yes
- Antistatic: No
- Non-slip: Yes
- Compliant with REACH: Yes



Ident. No. 050

Ident. No. 010
Nubbed textureExample of use in tool
trolleysNo skidding on inclined
surfaces

No skidding in boot

Mat design		Cuts	Roller
Length (mm)		1200	10000
Width (mm)		600	600
Material thickness (mm)		4	4
Min. temperature resistance (°C)		-10	-10
Max. temperature resistance (°C)		60	60
	Colour		
50225...	Black	Ident. No.	
		010	050
		●	●

Prod. Gr. 5AD

Rubber mats

From natural rubber, with fine grooves

Application:

For dry areas of application and normal use such as on workbenches, assembly laboratory areas, packing tables, inspection stands. For use as a floor runner with many applications in production settings, in front of machinery or anywhere that objects may slip, and for cutting to fit drawer inserts, tool trays or work surfaces for workbenches, cabinets, tool trolleys, cases and boxes.

Execution:

- Finely grooved surface profile
- Fine longitudinal grooves

- Base covering with excellent resistance to wear and tears
- Limited resistance to diluted acids and solutions

Technical data:

- Material: Natural rubber
- Surface structure: Fine notches
- Resistance against: Acid (limited)
- Suitable for wet areas: No
- Antistatic: No
- Non-slip: Yes
- Compliant with REACH: Yes



Mat design		Roller	Roller	Roller
Length (mm)		10000	10000	10000
Width (mm)		1000	1200	1000
Material thickness (mm)		3	3	6
Min. temperature resistance (°C)		-20	-20	-20
Max. temperature resistance (°C)		70	70	70
	Colour			
50225...	Black	Ident. No.		
		011	012	013
		●	●	●

Prod. Gr. 5AD

Rubber mat

Made from nitrile rubber, with fine grooves

Application:

For medium stresses in indoor and outdoor use. Normal application, such as for workbenches, assembly and laboratory areas, pack tables, inspection stands. For use as a floor runner with many applications in production settings, in front of machinery or anywhere that objects may slip, and for cutting to fit drawer inserts, tool trays or work surfaces for workbenches, cabinets, tool trolleys, cases and boxes.

Execution:

- Made from 3 mm thick rubber, resistant against oil

- Surface made of fine-groove profile, grooved in longitudinal direction

Technical data:

- Material: Rubber
- Surface structure: Fine notches
- Resistance against: Oil (limited)
- Suitable for wet areas: Yes
- Antistatic: No
- Non-slip: Yes
- Compliant with REACH: Yes



Mat design	Roller
Length (mm)	10000
Width (mm)	1000
Material thickness (mm)	3
Min. temperature resistance (°C)	-30
Max. temperature resistance (°C)	60

50229...	Colour	Ident. No.	015
	Black		●

Prod. Gr. 5AD

Soft PVC support, transparent

Height: 3 mm

Application:

Protects the work surface from soiling and damage.

Notes:

Not suitable for workbench panels in solid beech!

Execution:

- Free from DOP, cadmium and silicone
- Fire protection class B2 in line with DIN 4102

Technical data:

- Colour: Transparent
- Min. temperature resistance: -30 °C
- Max. temperature resistance: 60 °C



Length (mm)		1500	2000	1500	2000	1500	2000
Depth (mm)		700	700	750	750	800	800
Total thickness (mm)		3	3	3	3	3	3
50233...	Ident. No.	905	910	915	920	928	930
		●	●	●	●	●	●

Prod. Gr. 504



Knee board/mechanic's mat

Made from foam

Execution:


- Made from non-absorbent foam material with closed cells
- With carry/hanging handle

Advantage:

- Relieving for knees and back
- Wipeable, easy to clean surface
- Resistant against oil, petrol, brake cleaner as well as practically all liquids used in workshops

Technical data:

- Material: Foam material
- Resistance against: Oil | Fats | Petrol
- Suitable for wet areas: No
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Ident. No. 096



Ident. No. 098



Ref. no. 096



Ref. no. 098

Length (mm)				450	975
Width (mm)				210	385
	Surface structure	Material thickness (mm)	Colour		
50225...	Closed	30	Black Blue	Ident. No. 096	098

Prod. Gr. 506

Work mats made from PVC

Diamond plate structure, height 9 mm

Application:

Ideal for dry workstations and light- to medium-duty applications.

Execution:

- Single-layer, ergonomic PVC mat with non-slip diamond plate surface
- Non-slip and impact resistant, insulates against cold and protects the industrial floor
- R10 slip resistance in accordance with EN 13552
- Fire protection class B2 according to DIN 54332/ DIN 4102
- Weight approx. 3.5 kg/m²
- Ref. no. 164-167: with yellow safety marking strips on sides

Advantage:

- Relieves the back and leg muscles and prevents premature fatigue during extended periods of standing
- Increases general safety underfoot

- Easy to cut to the requested dimensions and shape

Delivery:

Mats delivered with bevelled edges, even if cut to size

Notes:

Sold by the metre up to max. length 18.3 m: We will be happy to cut the desired length to size. Mats which have been cut to size cannot be returned.

Technical data:

- Material: PVC - Polyvinyl chloride
- Mat design: Individual mat
- Min. temperature resistance: 0 °C
- Max. temperature resistance: 60 °C
- Suitable for wet areas: No
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Ref. no. 160-163 in black

Length (mm)				900	1500
Width (mm)				600	900
	Surface structure	Material thickness (mm)	Colour		
50225...	Stud plate / closed	9	Black	Ident. No. 160	161

Prod. Gr. 5AD

Workplace mats made from PVC

Grooved structure, height 9 mm

Application:

Ideal for dry workstations and light- to medium-duty applications.

Execution:


- Single-layer, ergonomic PVC mat with non-slip ribbed surface
- Non-slip and impact resistant, insulates against cold and protects the industrial floor
- R10 slip resistance in accordance with EN 13552
- Fire protection class B2 according to DIN 54332/DIN 4102
- Weight approx. 3.5 kg/m²
- Ref. no 182/187/192/197: with yellow safety marking strips on sides

Advantage:

- Relieves the back and leg muscles and prevents premature fatigue during extended phases of standing
- Increases general step safety
- Easy to cut to the requested dimensions and shape



Ident. No. 180, 185, 190-195



Ident. No. 182, 187



In grey/yellow

Length (mm)					900	1500	1000	1000
Width (mm)					600	900	900	1200
Mat design					Individual mat	Individual mat	Bulk stock	Bulk stock
	Surface structure	Material thickness (mm)	Colour					
50225...	Grooves / closed	9	Grey	Ident. No.	180 ●	185 ●	190 ○	195 ○
50225...	Grooves / closed	9	Grey Yellow	Ident. No.	182 ○	187 ○	-	-

Prod. Gr. 5AD

workplace mat made of SBR/nitrile rubber mixture, hard-wearing

In checker plate look, height 12.5 mm

Application:

Suitable for work areas subject to high temperatures, and also for workbenches, assembly and laboratory areas, packing tables or inspection stands.

Execution:

- Black closed mat, surface in checker plate design allows easy turning on the spot, made of SBR/nitrile rubber mixture
- Temperature-resistant from -30 °C to +70 °C
- Good resistance against oils and greases
- Slip prevention R9 according to EN 13552
- Material: Natural rubber/25% nitrile mixture
- Ident. No. 300:** With all-round bevelled edges for safe access
- Ident. No. 310-320:**
 - Dovetail connections mean that any length can be achieved (width of 700 mm)

- With bevelled edges on 3 sides

Advantage:


- Ident. No. 310-320:** Effortless design of production lines thanks to dovetail connection

Technical data:

- Material: Nitrile rubber
- Resistance against: Oil | Fats | Petrol | Coolant
- Min. temperature resistance: -30 °C
- Max. temperature resistance: 70 °C
- Suitable for wet areas: Yes
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Example application



Ident. No. 310-320
② Two end pieces, left and right
③ can be inserted in between until the required dimension is reached.

Ident. No. 300, 320
Example applications: ① Individual mat ② Two end pieces

Length (mm)					800	800	800
Width (mm)					700	700	700
Mat design					Individual mat	Middle piece	End piece
	Surface structure	Material thickness (mm)	Colour				
50225...	Stud plate / closed	12.5	Black	Ident. No.	300 ●	310 ●	320 ●

Prod. Gr. 5AD

Workplace mats made from PVC, manufactured to request

Textured structure, height 12.7 mm

Application:

For average durability in dry areas.

Execution:

- Microcellular vinyl with Dyna-Shield™ layer, non-slip surface R10 according to DIN 51130 and BG Rule BGR181
- fire protection class 2 according to NFPA 101
- Mats delivered with four bevelled edges
- Weight: 4 kg per m²
- Available upon request: Surface with wide horizontal or longitudinal grooves, in checker plate design, other colours black or grey

Advantage:

- Excellent standing comfort and increased durability thanks to Dyna-Shield™ surface - 50% more compared to conventional microcell vinyl floor covering

Notes:

Sold by the metre up to max. length 18.3 m: We will be happy to cut the desired length to size. Mats which have been cut to size cannot be returned.

Technical data:

- Material: PVC - Polyvinyl chloride
- Mat design: Bulk stock
- Min. temperature resistance: -10 °C
- Max. temperature resistance: 70 °C
- Suitable for wet areas: No
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Width (mm)					600	910	1220
	Surface structure	Material thickness (mm)	Colour				
50225...	Burling / closed	12.7	Grey	Ident. No.	620 ○	621 ○	622 ○
50225...	Burling / closed	12.7	Black Yellow	Ident. No.	623 ○	624 ○	625 ○

Prod. Gr. 5AD

Workplace mats made from PVC, manufactured to request

Diamond plate structure, height 14 mm

Application:

For high durability in dry industrial environments.

Execution:

- Extremely robust PVC mat, surface with checker plate design
- Dual layer: foamed PVC underside, extremely robust, self-extinguishing PVC upper section
- Moderate resistance to oils and greases
- Meets or exceeds the requirements of the Consumer Product Safety Commission, FF1-70
- Thickness: 14 mm
- Four all-round-chamfered safety edges, thus no risk of tripping

Advantage:

- Checker plate design enables easy turning on the spot
- Premium ergonomic mat for effective and reliable protection against the effects of standing for long periods



- Mat with yellow borders for safety marking

Notes:

Sold by the metre up to max. length of 18.3 m: we will be happy to cut the desired length to size. mats which have been cut to size cannot be returned.

Technical data:

- Material: PVC - Polyvinyl chloride
- Mat design: Bulk stock
- Min. temperature resistance: 0 °C
- Max. temperature resistance: 60 °C
- Suitable for wet areas: No
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Width (mm)					600	900	1200	1500
	Surface structure	Material thickness (mm)	Colour					
50225...	Stud plate / closed	14	Black	Ident. No.	630 ○	631 ○	632 ○	633 ○
50225...	Stud plate / closed	14	Black Yellow	Ident. No.	634 ○	635 ○	636 ○	637 ○

Prod. Gr. 5AD

workplace mats

with burred surface, made from either natural or nitrile rubber

Application:

Ident. No. 400–431: For dry areas of application and normal use such as on workbenches, assembly laboratory areas, packing tables, inspection stands.

Ident. No. 500–530: For high durability in wet, oily and industrial environments.

Execution:

▪ Black, closed mat with textured surface

▪ **Ident. No. 400–411, 500–510:**


- Can be used as an individual mat
- With all-round bevelled edges for safe access

▪ **Ident. No. 420–431, 520–530:**

- Central piece can be combined lengthwise with end piece
- Dovetail connections mean that any length can be achieved (width of 600 mm)
- With bevelled edges on 3 sides



Ident. No. 500–510



Ident. No. 420–431, 520–530
② Two end pieces, left and right Centre pieces ③
can be inserted
in between until the required dimension is reached.

Ident. No. 400–411, 430, 500–510, 530
Example applications: ① Individual mat ② Two end pieces

Length (mm)	900	1200	900	900	900
Width (mm)	600	900	600	600	600
Material	Natural rubber	Natural rubber	Natural rubber	Natural rubber	Nitrile rubber
Mat design	Individual mat	Individual mat	Middle piece	End piece	Individual mat
Resistance against	-	-	-	-	Oil Acid Fats Petrol Coolant
Suitable for wet areas	No	No	No	No	Yes
Surface structure	Burling / closed	Burling / closed	Burling / closed	Burling / closed	Burling / closed
Material thickness (mm)	14	14	14	14	14
Colour	Black	Black	Black	Black	Black
Ident. No.	400	410	420	430	500
50225...	401	411	421	431	-

Length (mm)	1200	900	900
Width (mm)	900	600	600
Material	Nitrile rubber	Nitrile rubber	Nitrile rubber
Mat design	Individual mat	Middle piece	End piece
Resistance against	Oil Acid Fats Petrol Coolant	Oil Acid Fats Petrol Coolant	Oil Acid Fats Petrol Coolant
Suitable for wet areas	Yes	Yes	Yes
Surface structure	Burling / closed	Burling / closed	Burling / closed
Material thickness (mm)	14	14	14
Colour	Black	Black	Black
Ident. No.	510	520	530
50225...	-	-	-

Prod. Gr. 5AD

ATORN® Polyurethane workplace mats, flame retardant

Textured structure, height 13 mm

Application:

For industrial work areas, e. g. welding stations.

Execution:


- Hardness 25 - 30 Shore
- with all-round bevelled edges for safe access
- Fire protection class B1 according to DIN 54332/ DIN 4102

Advantage:

- Relief for back and leg muscles during extended periods of standing

Technical data:

- Material: Polyurethane
- Mat design: Individual mat
- Suitable for wet areas: No
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Length (mm)	960	1200
Width (mm)	660	900
Surface structure	Flat / closed	Flat / closed
Material thickness (mm)	13	13
Colour	Anthracite grey RAL 7016	Anthracite grey RAL 7016
Ident. No.	602	612

Prod. Gr. 5AD



workplace mats Oil & Fire nitrile rubber mats (NBR), in three surface textures

application:

the modern and ergonomic workplace mats protect the joints and spine, prevent slipping and thus ensure optimum sure-footedness in the workplace. the mats are ideal for walking and standing workplaces such as at workbenches, conveyor belts, assembly tables and turning and milling machines. the additional flame retardant effect allows them to easily be used on workstations with weld spatter and flying sparks.

design:

- 100% nitrile rubber mats (NBR), colour black, with flat surface structure, height 16 mm, with diamond surface, height 18 mm, with textured surface, height 19 mm

advantages:

- puzzle system allows custom surfaces to be designed
- the easy solution for improved safety, health, comfort and productivity
- firm grip for secure footing

on request:

special dimensions and any shapes



the individual interlocking mats can be placed on any surface using the flexible interlocking system.



resistant against oils, fats and gasoline



flame retardant in accordance with EN 13501-1,
fire-protection class Bfl-S1,
temperature resistant -35 °C to +95°C



very high stability, therefore also
suitable as underlay when using
transportation equipment (up to approx. 200 kg)

the nitrile rubber mats (NBR), colour black, are delivered in three surface structures:

flat surface structure, height 16 mm



type B-N

hemispherical textured surface, height 19 mm



type B-N

diamond textured surface, height 18 mm




type B-N


easy transfer of the ERGOLASTEC workplace mats in the Puzzle system, here some examples:



in surface area

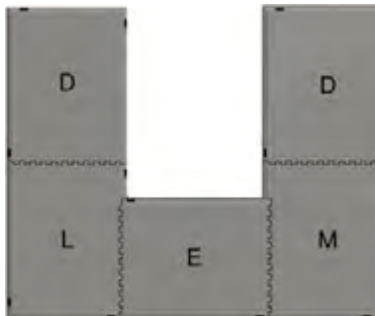


U-arrangement

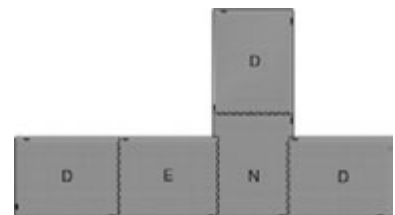

T-arrangement



in length



in width



special dimensions and a multitude of forms
deliverable on request

Workplace mats made from SBR rubber

Perforated structure, height 14 mm

Application:

Ident. No. 150: For dry and wet (but not oily) industrial working areas, e. g. on packing tables, workbenches, assembly/laboratory areas or inspection stands.

Ident. No. 155: For high durability in wet, oily and industrial environments.

Execution:


- Raised surface for improved anti-slip feature with chamfered safety edges all around
- Slip prevention R10 in accordance with EN 13552

Advantage:

- Anti-slip - impact resistant - anti-fatigue - insulated against cold
- Easy drainage of liquids using special knobs on the lower side
- **Ident. No. 155:** Highly resistant against oils, greases and chemicals

Technical data:

- Mat design: Individual mat
- Min. temperature resistance: -20 °C
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Ident. No. 155
Ident. No. 155 made of nitrile rubber



Ident. No. 150
Ref. no. 150 made of SBR rubber

Length (mm)		1500	1500
Width (mm)		900	900
Material		Natural rubber	Nitrile rubber
Resistance against		-	Oil Acid Fats Petrol Coolant
Max. temperature resistance (°C)		130	160
Suitable for wet areas		No	Yes
	Surface structure	Material thickness (mm)	Colour
50225...	Perforated / open	14	Black
50225...	Perforated / open	15	Blue

Prod. Gr. 5AD

Workplace mats made from nitrile rubber, oil-resistant

Perforated structure, height 22 mm

Application:

For high durability in wet, oily and industrial environments.

Execution:

- 100% nitrile rubber, resistant against the majority of industrial oils and chemicals
- Firm grip, non-slip surface R10 in accordance with DIN 51130 and BG Rule BGR 181
- Supplied with three ready-mounted bevelled orange safety edges
- Weight: 13 kg per m²
- REACH-compliant and silicone-free
- Special models upon request – CAD drawing included with our quotation


Advantage:

- Very comfortable, high-quality anti-fatigue mat with holes for excellent drainage and ventilation

- Ensures a dry, clean workplace in oily industrial areas

Technical data:

- Material: Nitrile rubber
- Mat design: Individual mat
- Resistance against: Oil | Acid | Fats | Petrol | Coolant
- Min. temperature resistance: -20 °C
- Max. temperature resistance: 150 °C
- Suitable for wet areas: Yes
- Antistatic: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Compliant with REACH: Yes



Length (mm)		1020	1630	3150
Width (mm)		660	970	970
	Surface structure	Material thickness (mm)	Colour	
50225...	Perforated / open	22	Black Orange	Ident. No.

Prod. Gr. 5AD



MATE anti-fatigue mats

Individual mats with HAM-O® anti-fatigue mat, heavy

Application:

For increased comfort when standing at wet workstations by relaxing muscles and joints and providing dry, secure ground.

Execution:

- Combined absorbent and anti-fatigue mat with an ergonomic nitrile tray
- Made from 100% polypropylene
- Can be refilled

■ **Ident. No. 960:** Nitrile base (LxW: 163 x 91 cm)

■ **Ident. No. 970:** Nitrile base (LxW: 316 x 91 cm)

Delivery:

10 anti-fatigue mats and 1 nitrile tray

Technical data:

- Type: Universal
- Absorptive capacity: High



Length x width		150 x 81 cm	300 x 81 cm
Suction volume (l)		58.5	117.1
Type description		MATE916	MATE917
	Colour		
69746...	Tarn pattern	Ident. No. 960 ○	-
69746...	Black Grey	Ident. No. -	970 ○

Prod. Gr. 6PA

Accessories for		69746 960	69746 970
69746...	Refill pack for All-in-1 mat sets Comprises 10 individual mats	Ident. No. 961 ○	971 ○

Floor grate

High-pressure polyethylene

Application:

For machine and workbench workstations.

Execution:

- Anti-slip and non-skid, can support loads of up to 40000 kg/m²
- Highly resistant against oils, acids, solvents and alkalis
- Easy to move individually in a longitudinal or transverse direction thanks to hook connections

Technical data:

- Surface structure: Serrated
- Material: PE - Polyethylene
- Resistance against: Oil | Acid | Fats | Petrol | Coolant
- Min. temperature resistance: -10 °C
- Max. temperature resistance: +80 °C
- Suitable for wet areas: Yes
- Anti-fatigue: Yes
- Non-slip: Yes



Example application

Length (mm)		1200	1200	1200
Width (mm)		600	600	600
Height (mm)		25	25	25
Colour		Green	Orange	Blue
	With levelling wedge			
50225...	Optional	Ident. No. 101 ●	102 ●	103 ●

Prod. Gr. 5AD

Wooden safety floor grate

Grooved beech wood

Application:

Suitable for dry work areas and industrial workstations, especially for tool machines, CNC machines, workbenches.

Execution:

- Made from stable, corrugated beech wood panel, connected with a steel cable
- Anti-slip and non-skid due to elastic rubber feet
- Weight: approx. 13 kg/m²


Advantage:

- Resistant to oils, acids and hot chips
- With rubber layer to relieve the muscles of the legs and the back, it has a performance-stimulating and health-promoting effect on employees working on the machine

- The wooden grating guarantees secure footing and protects the valuable industrial floor

Technical data:

- Surface structure: Grooved
- Material: Beech
- Resistance against: Oil | Acid | Fats | Petrol | Coolant
- Min. temperature resistance: -30 °C
- Max. temperature resistance: 120 °C
- Suitable for wet areas: No
- Anti-fatigue: Yes
- Non-slip: Yes
- Colour: Light brown



Length (mm)				1500	2000	1500	2000
Width (mm)				800	800	1000	1000
Height (mm)				35	35	35	35
		With levelling wedge					
50229...		No	Ident. No.	310 (○)*	320 (○)*	330 (○)*	340 (○)*
50229...	With access ramp on 2 sides	Yes	Ident. No.	312 (○)*	322 (○)*	332 (○)*	342 (○)*
50229...	With access ramp on 3 sides	Yes	Ident. No.	313 (○)*	323 (○)*	333 (○)*	343 (○)*

Prod. Gr. 5AD



safety wooden floor grids in special designs

any shape is possible: simply indicate the dimensions and we can produce any shape to meet your specifications. using special connectors, multi-component

wooden floor grids can also be connected to each other. please contact us. technical hotline +49(0) 7141 498-5819



ATORN® Accessories – foot extension For ATORN aluminium profile telescopic ladders

Execution:

- Continuous adjustment range via reliable clamping
- connection unit
- Can be used on both the left and right-hand side



50259...

Ident. No.

598

Prod. Gr. 5AF

ATORN® Aluminium step ladder (EN standard 131) double-sided access – wide steps

Execution:

- High-strength extruded aluminium strut profiles in C-profile shape = light weight and maximum torsional rigidity
- Particularly deep aluminium treads allow safe, fatigue-free standing
- The joints between the stiles and the rungs use highly shear-resistant steel rivets to guarantee the highest possible level of safety and maximum durability for the aluminium ladder
- 12 sturdy aluminium cross struts ensure optimum stability of the stepladder

- Special soft plastic shoes guarantee superb resistance to displacement when standing

Advantage:

- steps with 85 mm deep outlet areas

Technical data:

- Max. load capacity: 150
- Material: Aluminium
- EN standard: 131



Ident. No. 581

Number of steps	2 x 3	2 x 4	2 x 5	2 x 7	2 x 9
Working height (m)	1.71	1.92	2.13	2.55	2.97
Length (m)	0.73	0.96	1.19	1.65	2.11
Platform height (m)	0.64	0.85	1.07	1.49	1.91
Height, vertical (m)	0.73	0.96	1.19	1.65	2.11
Pedestal width (m)	0.43	0.45	0.47	0.52	0.57
Weight (kg)	4.7	6.0	7.3	10.1	14.2

50259...

Ident. No.

580

581

582

583

584

Prod. Gr. 5AF

ATORN® aluminium step ladder (EN standard 131) single-sided access – wide steps



Execution:

- comfortable and secure footing on non-slip safety platform
- 85 mm deep steps
- High non-bendable safety bar
- Slip-proof ribbing of steps
- High level of stability with low weight
- GS-tested

Advantage:

- With practical aluminium tray for storing tools and other materials

Technical data:

- Max. load capacity: 150 kg
- Material: Aluminium
- With storage tray: Yes
- EN standard: 131



Ident. No. 571



Number of steps (including platform)	1 x 3	1 x 4	1 x 5	1 x 7	1 x 9
Working height (m)	2.75	3.00	3.25	3.75	4.25
Length (m)	1.52	1.79	2.06	2.60	3.14
Platform height (m)	0.75	1.00	1.25	1.75	2.25
Pedestal width (m)	0.51	0.54	0.57	0.63	0.66
Weight (kg)	8.0	9.0	10.1	12.6	15.0
50259...	Ident. No.	570	571	572	573
		○	○	○	○

Prod. Gr. 5AF



Mobile step stool (EN standard 14183) Shatterproof plastic

Execution:

- Mobile, secure and non-slip „mini ladder“
- 2-step platform, round, without corner guards
- Runs smoothly on 3 rollers which retract into the housing when someone stands on the stool
- TÜV and GS-tested in accordance with EN 14183-F

- Surface area diameter: 440 mm
- Standing area diameter: 290 mm
- Height: 430 mm
- Weight with load: 425 mm
- Load-carrying capacity: 150 kg
- Material: Plastic
- EN standard: 14183
- Colour: Light grey RAL 7035

Technical data:

50260...	Ident. No.	005
		●

Prod. Gr. 505



ATORN® stepladder (EN standard 14183) accessible from both sides; can be folded away



Application:

Can be accessed up to the platform.

Execution:

- Extra-large standing platform for safe and comfortable working
- central platform with small gap – for carrying without crushing fingers
- Ribbed steps and standing platform
- Wide and deep aluminium steps
- Steps and struts are made from aluminium extruded sections and have a torsion-resistant connection

- Non-slip plastic feet for secure standing

Notes:


Can be used as a working platform with the ATORN telescopic plank 50259 595+596. No other measures required as standing height is less than 1 m

Technical data:

- Platform dimension: 61 x 39 cm
- Folding: Yes
- Material: Aluminium
- Load capacity: 150 kg
- EN standard: 14183

Number of steps (including platform)	2 x 2	2 x 3	2 x 4	2 x 5
Stand height (m)	0.37	0.56	0.74	0.93
Working height (m)	1.87	2.06	2.24	2.43
Reaching height (m)	2.37	2.56	2.74	2.93
Length (m)	0.52	0.71	0.91	1.11
Stride length (m)	0.71	0.88	1.04	1.20
Width (bottom)/width (top)	0.65/0.61 m	0.67/0.61 m	0.69/0.61 m	0.71/0.61 m
Weight (kg)	7.2	9.2	11.3	13.3
50259...	Ident. No.	532	533	534
		●	●	●

Prod. Gr. 5AF



Ident. No. 533

ATORN® Aluminium service platforms (EN standard 14183)

rigid



Application:

The proven and lightweight aluminium machine step for demanding industrial applications with non-slip steps.

Execution:

- Sturdy, welded tube construction made of sturdy aluminium
- 240 mm deep steps made from aluminium checker plate ensure safe ascent and descent

- Upper base area 520 x 305 mm for a secure stand
- Non-slip foot caps

Technical data:

- Material: Aluminium
- EN standard: 14183



Ident. No. 412



Ident. No. 413



Ident. No. 414

Number of steps (including platform)	1 x 1	1 x 2	1 x 3	1 x 4	1 x 5
Podium height (m)	0.2	0.4	0.6	0.8	1.0
Surface area	0.36 x 0.59 m	0.68 x 0.63 m	0.73 x 0.88 m	0.77 x 1.14 m	0.81 x 1.40 m
Working height (m)	2.2	2.4	2.6	2.8	3.0
Weight (kg)	2.4	5.0	7.0	9.8	12.0
Accessibility					
50259...	One-sided	Ident. No.	411	412	413
			○	○	○
414			414	415	416
			○	○	○

Prod. Gr. 5AF



Rotary tower for drawer magazine, 150 mm depth

Empty or equipped with 12 drawer magazines with a depth of 150 mm

Application:

For clearly-arranged and dust-free storage of small parts in transparent drawers

Execution:

- Frame made of steel sheet metal, colour dark blue
- Polypropylene drawers, transparent and shatter-proof with pull-out safety device; resistant to most solvents and oils
- Stable, secure stand on height-adjustable feet
- Smooth-running turntable on maintenance-free roller bearings

- For all units with a height of 555 mm
- Equipped with 12 drawer units, dimensions per unit H x W x D: 555 x 307 x 150 mm: 4 pieces with no. 50002 092 - (48 drawers per unit), 4 pieces with no. 50002 102 - (24 drawers per unit) and 4 pieces with no. 50002 122 - (8 drawers per unit).

Technical data:

- Suitable for magazine depth: 150 mm
- Material: Sheet steel
- Colour: Dark blue



Equipped	Yes
Number of drawer magazines (PCS)	12
Height (mm)	1760
Ø (mm)	680
Load-carrying capacity (kg)	480
50002...	305
Ident. No.	

Prod. Gr. 500



Drawer magazines, 250 mm depth

Made from sheet steel, with unbreakable drawers

Application:

Clearly arranged and dust-free storage of small parts. The drawer units can be mounted on walls (using fixtures), at workstations or on space-saving turntables.

Execution:

- Warp-resistant and sturdy frame made of sheet steel, colour dark blue
- Dipcoat primer protects against rust
- Polypropylene drawers, transparent and shatter-proof with pull-out safety device; resistant to most solvents and oils

Notes:

Ident. No. 502: Drawers can be labelled or divided, see accessories from 50002520-524

Ident. No. 504-506: Drawers can be labelled or further divided using dividers, see accessories from 50002520-524

Technical data:

- Material: Sheet steel
- Body colour: Dark blue
- Drawer material: Polypropylene



Ident. No. 502



Ident. No. 504



Ident. No. 506

Number of drawers (PCS)		24	8	6
Number of drawers x type		24 x E	8 x F	6 x G
Height (mm)		435	435	435
Width (mm)		357	357	357
Depth (mm)		250	250	250
Load-carrying capacity (kg)		75	75	75
50002...	Ident. No.	502	504	506
		●	●	●

Prod. Gr. 500

W-KLT® storage boxes with front flap

Stackable, made from polypropylene

Application:

In Euro dimensions with integrated dispenser function for clearly arranged storage of small parts, consumables and bulk materials.

Execution:

- Box made from polypropylene, dispenser made from ABS
- Circumferential stack edge for easy stacking
- Reinforced base, high load-bearing capacity and dimensional stability
- Recessed handles for optimum grip when transporting
- Smooth internal walls facilitate easy cleaning of boxes
- Label field for clear labelling of box or goods

Advantage:

- Allows access to contents when stacked, space-saving storage of containers with integrated dispensers
- The open front flap allows you to identify and remove contents easily even when stacked

- Up to 50% less shelf space and surface area required
- Maximum efficiency and optimisation of work processes
- Impact-resistant and break-proof

Notes:

Accessories: W-KLT®-CLIP hook-on profile no. 50237 085 is simply slotted onto the back of W-KLT® storage boxes. This allows the storage box to be mounted easily on CLIP-O-FLEX support rails. For optimum and ergonomic provision of storage boxes in the workplace.

Technical data:

- Material: PP - Polypropylene
- Min. temperature resistance: -20
- Max. temperature resistance: 90
- With handle: Yes



Ident. No. 012



Ident. No. 013



Ident. No. 014



Tipping function – easy removal, even when stacked



Reinforced base, high resilience and dimensional stability



Recessed handles for optimum grip during transport



Label holder for clear labelling of the box or goods





Circumferential stacking rim makes vertical stacking easy



W-KLT®-CLIP hook-in bracket no. 50237 085 for hooking into the rear panel of the W-KLT® storage boxes no. 50057 012-014



The W-KLT®-CLIP hook-in bracket can be used to hook the boxes into the CLIP-O-FLEX support rails



External length (L1) (mm)				197	297	396
External length, open (L2) (mm)				290	385	486
Außenbreite (B2) (mm)				148	198	298
External height (H2) (mm)				147	147	147
Internal length (L3) (mm)				155	247	335
Inner width (B1) (mm)				117	166	265
Innenhöhe (H1) (mm)				129	115	115
Stack load (kg)				75	75	75
Load-carrying capacity (kg)				25	30	30
	Colour	With lid				
50057...	Night blue	No	Ident. No.	012	013	014
	RAL 5022			●	●	●

Prod. Gr. 504

Accessories for		50057 012	50057 013	50057 014
50057... cover for W-KLT® storage boxes, for box no. 50057 012	Ident. No.	490	-	-
50057... cover for W-KLT® storage boxes, for box no. 50057 013	Ident. No.	-	491	-
50057... cover for W-KLT® storage boxes, for box no. 50057 014	Ident. No.	-	-	492

Euronorm stack container

Made from polypropylene

Application:

Storage, picking and transport container

Execution:

- Stable plastic containers in Euro dimensions, made of unbreakable polypropylene which is safe for foodstuffs and is 100% recyclable, with smooth base
- High carrying comfort due to ergonomically rounded carrying open grips on the front sides (except for height 120 mm)
- Document holder integrated on all sides
- High stacking safety thanks to surrounding stacking border
- Resistant to many acids and lyes

Advantage:

- Ideal for use on conveying and roller tracks thanks to rounded corners and flat bases, container dimensions tailored to Euro pallet, large internal volume thanks to optimal side wall design, easy cleaning due to closed design with smooth bases and walls

Technical data:

- Material: PP - Polypropylene
- Suitable for use with food products: Yes
- Min. temperature resistance: -20 °C
- Max. temperature resistance: 90 °C
- With handle: Yes



Stackable containers with hinged folding cover

External length (mm)				300	400	400	600	600	600
External width (mm)				200	300	300	400	400	400
External height (mm)				120	120	220	120	220	270
Internal length (mm)				268	368	368	568	568	568
Internal width (mm)				168	268	268	368	368	368
Interior height (mm)				117	117	217	116	216	266
Volume (l)				3.5	9.8	19	21	41	51
Load-carrying capacity (kg)				15	30	30	15	15	15
Stack load (kg)				250	250	250	300	300	300
	Colour	With lid							
50059...	Blue	No	Ident. No.	110 ○	120 ○	130 ○	140 ○	150 ○	160 ○
50059...	Red	No	Ident. No.	112 ○	122 ○	132 ○	-	152 ○	162 ○
50059...	Blue	Yes	Ident. No.	210 ○	220 ○	230 ○	240 ○	250 ○	260 ○
50059...	Red	Yes	Ident. No.	-	222 ○	232 ○	-	252 ○	262 ○
External length (mm)				600	600	800			
External width (mm)				400	400	600			
External height (mm)				320	420	320			
Internal length (mm)				568	568	762			
Internal width (mm)				368	368	562			
Interior height (mm)				316	416	315			
Volume (l)				62	82	128			
Load-carrying capacity (kg)				20	20	60			
Stack load (kg)				300	300	800			
	Colour	With lid							
50059...	Blue	No	Ident. No.	170 ○	180 ○	190 ○			
50059...	Red	No	Ident. No.	172 ○	182 ○	-			
50059...	Blue	Yes	Ident. No.	270 ○	280 ○	290 ○			
50059...	Red	Yes	Ident. No.	272 ○	282 ○	-			

Prod. Gr. 504

fetra Transport roller for Euro containers

Transportgeräte

Angle steel, load capacity 250 kg



Application:

For transport Euronorm containers, for constant industrial use.

Advantage:

- Safe transport of Euronorm containers thanks to precisely dimensioned frame
- Durable thanks to robust design

Technical data:

- Material of the loading surface: Angle steel

- Load-carrying capacity: 250 kg
- Loading-surface height: 182 mm
- Number of fixed rollers: 0 PCS
- Number of steering rollers: 4 PCS
- With wheel lock: Yes
- Total stop optional: No
- Wheel width: 32 mm
- Wheel diameter: 125 mm
- Material of the wheel: TPE
- Surface: Powder-coated



Loading surface size		605 x 405 mm	810 x 610 mm	605 x 405 mm
Colour		Brilliant blue RAL 5007	Brilliant blue RAL 5007	Anthracyte grey RAL 7016
50267...	Ident. No.	135 ●	136 ●	-
50257...	Ident. No.	-	-	135 ○

50267... = Prod. Gr. 5AB

50257... = Prod. Gr. 5AE

Accessories for		50267 135	50267 136
50267... Sliding handle for Euro container transport roller	Ident. No.	137 ○	137 ○

Table trolley with 2 wooden load areas (EN standard 1757-3) Suitable for Euro containers, total carrying capacity 250 kg

Application:

For transporting Euronorm containers or as a serving trolley for small parts in production and assembly.

- Robust design
- Elegant HK design

Delivery:

Disassembled

Execution:

- Welded angular steel frame
- Suitable for Euro crates 600 x 400 mm
- Loading surfaces made from wooden panel board, edge 10 mm
- Clear floor distance 400 mm
- Thermoplastic rubber tyres, grey, non-chalking
- Plastic rims with precision deep groove ball bearings and thread guards
- Sliding handle with soft hose casing

Technical data:

- Material of the loading surface: Wood composite board
- Loading surface size: 605 x 410 mm
- Load-carrying capacity: 250 kg
- Length x width x height: 675 x 415 x 635 mm
- Number of loading surfaces: 2
- Loading-surface height: 195 mm | 625 mm
- Number of steering rollers: 4
- With wheel lock: Yes
- Material of the wheel: TPE
- Surface: Powder-coated

Advantage:

- Ideal combination of transport trolley and serving trolley



Ident. No. 139



Ident. No. 138

With handle		No	Yes
Colour			
50269...	Anthracyte grey RAL 7016	138 ○	139 ○

Prod. Gr. 504

Easy-view storage bin

Made from sheet steel

Application:

Storage and transport of heat-treated parts in the production process, can be used as a collection container for metal parts directly from the machine

- three-sided stacking border for longitudinal and transverse stacking of different sizes
- With label holder for identification labels
- Temperature resistance for painted bins: -10°C to +90°C, for galvanised bins: -30°C to +150°C

Execution:

- High capacity, service life and temperature resistance, impact-resistant
- High visibility of material stored due to front-side opening
- Parts can also be added and removed when the bins are stacked

Technical data:

- Material: Sheet steel
- Resistance against: Oil | Acid
- With lid: No
- Suitable for impact work: Yes



Length (mm)				160/140	230/200	350/300	350/300	500/450	520/450	700/630
Width (mm)				95	140	200	200	300	450	450
Height (mm)				75	130	145	200	200	300	300
Volumetric capacity				1 l	3.8 l	9.4 l	12.5 l	28 l	63 l	88 l
50054...	Colour	Surface	Ident. No.	300 ●	310 ●	320 ●	330 ●	340 ●	350 ●	360 ○
	Grey	Lacquered								
50054...	Colour	Surface	Ident. No.	302 ○	312 ●	322 ●	332 ●	342 ●	352 ○	362 ○
	Green	Lacquered								
50054...	Colour	Surface	Ident. No.	-	314 ●	324 ●	334 ●	344 ●	354 ○	-
	Silver coloured	Galvanised								

Prod. Gr. 504

Multibox shelf box

Made from polypropylene

Execution:

- The shelf boxes can be used like drawers and fitted with a height-adjustable handle
- Prevents items falling out unintentionally and is very useful when carrying by hand
- This high-quality polypropylene ensures an above-average service life for the boxes

Delivery:

Without dividers and labels

Notes:

For accessories such as dividers, labels and handles see from no. 50056 265-307

Technical data:

- Material: PP - Polypropylene
- Colour: Blue



Ident. No. 200-220, 240, 260-264



Ident. No. 230



Ident. No. 250

Height (mm)		100	100	100	100	100	100	100	100
Length (mm)		300	400	500	300	400	500	600	500
Width (mm)		120	120	120	160	160	160	160	240
Max. number of partition walls (PCS)		4	6	8	4	6	8	10	6
50056...	Ident. No.	200	210	220	230	240	250	260	262
		●	●	●	●	●	●	●	●

Prod. Gr. 505

Accessories for multi-box shelf boxes

Nos. 50056 200-264

Execution:

- Ident. No. 265: 1 sheet = 12 pieces
- Ident. No. 270: 1 sheet = 8 pieces
- Ident. No. 272: 1 sheet = 6 pieces
- Ident. No. 275: 1 sheet = 24 pieces
- Ident. No. 280: 1 sheet = 16 pieces



Ident. No. 300
Illustration shows box with handle



Ident. No. 275, 290
Illustration shows box with divider/label

Colour			White	Transparent	Blue
50056...	Labels for boxes 50056200-220 12 pieces	Ident. No.	265	-	-
50056...	Labels for boxes 50056230-260 8 pieces	Ident. No.	270	-	-
50056...	Labels for boxes 50056262-264 6 pieces	Ident. No.	272	-	-
50056...	Labels for dividers for boxes 50056200-220 24 pieces	Ident. No.	275	-	-
50056...	Divider labels for boxes 50056230-264 16 pieces	Ident. No.	280	-	-
50056...	Divider for boxes 50056200-220	Ident. No.	-	290	-
50056...	Divider for boxes 50056230-260	Ident. No.	-	295	-
50056...	Divider for boxes 50056262-264	Ident. No.	-	297	-
50056...	Handle for boxes 50056200-220	Ident. No.	-	-	300
50056...	Handle for boxes 50056230-260	Ident. No.	-	-	305
50056...	Handle for boxes 50056262-264	Ident. No.	-	-	307

Prod. Gr. 505

Easy-view storage bin impact-resistant, fracture-resistant polypropylene

Application:

For ideal storage of small parts, consumables and bulk materials.

Execution:

- Impact-resistant, unbreakable
- With circumferential stack edge
- Reinforcement ribs for excellent stability
- Reinforced recessed handles

Delivery:

Minimum order quantity: 10 pieces

Notes:

Front flaps, lids, dividers and labels available as accessories.

Technical data:

- Material: PP - Polypropylene
- Resistance against: Fats | Oil
- Min. temperature resistance: -20 °C
- Max. temperature resistance: 90 °C
- With lid: Optional
- Suitable for impact work: Yes



Easy-view storage bin with lid

Size			1	2	3	4	5
Length (mm)			489/440	335/303	230/202	161/140	90/68
Width (mm)			305	209	151	106	102
Height (mm)			185	152	130	75	49
	Colour						
50057...	Red	Ident. No.	006	011	016	021	026
50057...	Blue	Ident. No.	106	111	116	121	126
50057...	Green	Ident. No.	206	211	216	221	226
50057...	Yellow	Ident. No.	306	311	316	321	326
50057...	Grey	Ident. No.	406	411	416	421	426

Prod. Gr. 505

Easy-view storage bin Made from shatterproof and impact-resistant polyethylene

Execution:

- 8 different box sizes in 5 colours: grey, green, blue, red and yellow, with surrounding stacking border
- Shatterproof and stable in form, highly resilient, environment-friendly, fully recyclable
- Temperature-resistant: -40°C to +80°C, can therefore also be used under extreme climatic conditions, resistant against acids, oils and lyes
- Smooth inside walls, i.e. easy to clean and safe for foodstuffs
- Suitable for use on conveying and roller tracks
- Label holder with special clamps, prevents labels from slipping out

Advantage:

- length 85 mm, 160 mm, 230 mm and 290 mm, for mounting, suitable for RasterPlan slotted panels

Delivery:

Deliverable without labels, accessories upon request.

Technical data:

- Material: PE - Polyethylene
- Resistance against: Oil | Acid | Lye
- Min. temperature resistance: -40 °C
- Max. temperature resistance: 80 °C
- With lid: Optional
- Suitable for impact work: Yes



A special hanging strip enables horizontal attachment of the box



Sturdy label holder with clamping action



Continuous stacking rim



Reinforced ridges



Smooth inside walls for easy cleaning



Strong handle and push grip with multiple reinforcement on the inspection hole



Length (mm)					500	500	350	350	290
Width (mm)					300	300	200	200	140
Height (mm)					250	200	200	150	130
Suitable for slotted plates					No	No	No	No	Yes
Easy-view storage bin	50638...		Colour						
	50638...		Blue	Ident. No.	810	811	812	813	814
	50638...		Grey	Ident. No.	820	821	822	823	824
	50638...		Red	Ident. No.	830	831	832	833	834
Accessories for boxes, containers	50638...	Identification label		Ident. No.	850	850	852	852	854
	50638...	Label cover		Ident. No.	860	860	862	862	864
	50638...	Supporting cover		Ident. No.	870	870	872	872	874
	50638...	handle		Ident. No.	890	890	892	892	-
Length (mm)					230	160	85		
Width (mm)					140	105	105		
Height (mm)					130	75	45		
Suitable for slotted plates					Yes	Yes	Yes		
Easy-view storage bin	50638...		Colour						
	50638...		Blue	Ident. No.	815	816	817		
	50638...		Grey	Ident. No.	825	826	827		
	50638...		Red	Ident. No.	835	836	837		
Accessories for boxes, containers	50638...	Identification label		Ident. No.	854	856	858		
	50638...	Label cover		Ident. No.	864	866	868		
	50638...	Supporting cover		Ident. No.	875	876	-		
	50638...	handle		Ident. No.	-	-	-		

Prod. Gr. 5AC

Wall shelf Equipped with easy-view storage bins made from polystyrene

Application:

The shelves are particularly suitable for the storage of small items where space is limited. Rails can be hooked in so that the easy-view storage bins can be mounted in the side profiles (shelf must be attached to the wall).

Execution:

- Stable profile steel construction (sheet steel, galvanised)

Delivery:

Colours of easy-view storage bins as shown



Ident. No. 555



Ident. No. 560



Ident. No. 565

Height (mm)	1125	1275	1525	
Width (mm)	1055	1055	1055	
Number of bins (PCS)	58	62	77	
Load-carrying capacity (kg)	135	145	165	
Number of bins 160 x 105 x 75 mm (PCS)	36	36	45	
Number of bins 230 x 140 x 130 mm (PCS)	18	18	24	
Number of bins 350 x 200 x 150 mm (PCS)	4	8	8	
50057...	Ident. No.	555	560	565
		○	○	○

Prod. Gr. 504

Notes:

To reorder individual HK easy-view storage bins, see no. 50057 005-425 in the Workstation chapter.

Technical data:

- With bins: Yes
- Material: Sheet steel

Plug-in racks

Equipped with RasterPlan easy-view storage bins made from polyethylene

Application:

For the orderly storage of small parts in easy-view storage bins; shelving systems can be installed and removed thanks to basic and add-on bays.

Execution:

- Stable, with high carrying capacity per shelf
- Shelves galvanised, height-adjustable in increments of 25 mm

Delivery:

Flat packed delivery, simple assembly of shelves thanks to plug-in system

Notes:

Indicate the required colour of the easy-view storage bins when ordering, otherwise an assortment will be delivered. Carrying capacities per shelf are for uniformly distributed loads.

Technical data:

- Height: 2000 mm
- Load-carrying capacity per shelf: 125 kg
- Type of assembly: To insert
- Box material: Polyethylene
- Material of framework: Steel plate
- Frame surface: Plastic-coated



Ident. No. 162



Ident. No. 164



Ident. No. 165

Model	10	11	12	13	14	15
Width (mm)	1000	1000	1000	1000	1000	1000
Depth (mm)	300	300	400	400	400	600
Number of shelves (PCS)	10	10	8	10	11	7
Number of bins 230 x 140 x 130 mm (PCS)	-	60	-	-	-	-
Number of bins 290 x 140 x 130 mm (PCS)	60	-	-	-	36	-
Number of bins 350 x 200 x 150 mm (PCS)	-	-	-	40	20	-
Number of bins 350 x 200 x 200 mm (PCS)	-	-	32	-	-	-
Number of bins 500 x 300 x 200 mm (PCS)	-	-	-	-	-	21

	Version	Colour of frame							
50640...	Shelving unit	Gentian blue RAL 5010	Ident. No.	110 (O)⁺	111 (O)⁺	112 (O)⁺	113 (O)⁺	114 (O)⁺	115 (O)⁺
50640...	Add-on shelving	Gentian blue RAL 5010	Ident. No.	210 (O)⁺	211 (O)⁺	212 (O)⁺	213 (O)⁺	214 (O)⁺	215 (O)⁺
50640...	Shelving unit	Anthracite grey RAL 7016	Ident. No.	160 O	161 O	162 O	163 O	164 O	165 O
50640...	Add-on shelving	Anthracite grey RAL 7016	Ident. No.	260 O	261 O	262 O	263 O	264 O	265 O

Model	16
Width (mm)	2000
Depth (mm)	400
Number of shelves (PCS)	19
Number of bins 230 x 140 x 130 mm (PCS)	-
Number of bins 290 x 140 x 130 mm (PCS)	36
Number of bins 350 x 200 x 150 mm (PCS)	20
Number of bins 350 x 200 x 200 mm (PCS)	32
Number of bins 500 x 300 x 200 mm (PCS)	-

	Version	Colour of frame		
50640...	Shelving unit	Gentian blue RAL 5010	Ident. No.	116 (O)⁺
50640...	Add-on shelving	Gentian blue RAL 5010	Ident. No.	-
50640...	Shelving unit	Anthracite grey RAL 7016	Ident. No.	166 O
50640...	Add-on shelving	Anthracite grey RAL 7016	Ident. No.	-

Prod. Gr. 5AC



Trolley

Equipped with easy-view storage bins made from polystyrene

Application:

For transporting and providing spare and small parts on the work floor and in the warehouse.

Execution:

- Sheet steel trolley with 2 steering rollers, 2 fixed castors and 2 wheel blocks
- Easy-view storage bins made of polystyrene, impact-resistant and stackable
- Sliding handles on the side profiles make the trolley easier to operate, even when loaded

Delivery:

Colours of easy-view storage bins as shown

Notes:

To reorder individual HK easy-view storage bins, see no. 50057 005-425 in the Workstation chapter.

Technical data:

- With bins: Yes
- Load-carrying capacity: 250 kg
- Number of fixed rollers: 2 PCS
- Number of steering rollers: 2 PCS
- Number of wheel adjusters: 2 PCS
- Material: Sheet steel
- Colour: Light grey RAL 7035



Ident. No. 570



Ident. No. 575



Ident. No. 580

Height (mm)	1295	1445	1695
Width (mm)	1055	1055	1055
Depth (mm)	700	700	700
Height (mm)	1295	1445	1695
Number of bins 160 x 105 x 75 mm (PCS)	72	72	90
Number of bins 230 x 140 x 130 mm (PCS)	36	36	48
Number of bins 350 x 200 x 150 mm (PCS)	8	16	16
50057...	Ident. No. 570	Ident. No. 575	Ident. No. 580

Prod. Gr. 504



Wing door cabinets, height 1028 mm, 1680 mm, 1950 mm

Equipped with easy-view storage bins made from polystyrene



Application:

For clearly-arranged storage of small parts in HK easy-view storage bins.

Execution:

- Doors with multiple edges and reinforced
- All components with safety edgings
- Galvanised and height-adjustable shelves
- Ident. No. 530-531, 538: Door load: 20 kg where the load is evenly distributed

Delivery:

Colours of easy-view storage bins as shown

Notes:

To reorder individual HK easy-view storage bins, see no. 50057 005-425 in the Workstation chapter.

Technical data:

- Load-carrying capacity per shelf: 40 kg
- Door design: Full-sheet panel
- Lock type: Twist-grip lock with three-point fastening
- Material: Sheet steel
- Surface: Powder-coated



Ident. No. 501



Ident. No. 511



Ident. No. 521



Ident. No. 531

Model				1	2	3	4
Height (mm)				1028	1680	1950	1950
Width (mm)				710	710	710	1200
Depth (mm)				300	300	300	500
Number of shelves (PCS)				6	11	15	11
Number of bins 85 x 105 x 45 mm (PCS)				-	-	-	40
Number of bins 160 x 105 x 75 mm (PCS)				12	36	60	90
Number of bins 230 x 140 x 130 mm (PCS)				20	24	24	28
Number of bins 350 x 200 x 150 mm (PCS)				-	-	-	10
Number of drawers (PCS)				-	-	-	3
Drawer front height				-	-	-	3 x 90 mm
Load-carrying capacity per drawer (kg)				-	-	-	40
Pullout type				-	-	-	Full extension
	Body colour	Colour of front					
50057...	Light grey RAL 7035	Gentian blue RAL 5010	Ident. No.	500 (○)*	510 (○)*	520 (○)*	530 (○)*
50057...	Optional	Optional	Ident. No.	532 (○)*	534 (○)*	536 (○)*	538 (○)*
50057...	Light grey RAL 7035	Anthracite grey RAL 7016	Ident. No.	501 ○	511 ○	521 ○	531 ○

Prod. Gr. 504
for colours deliverable without a surcharge, see page 1434

RasterPlan Perforated plate with 10 x 10 mm square perforation



Application:

For attachment to the wall or workbenches.

Execution:

- From high-quality processed sheet steel, 1.25 mm thick, 10 x 10 mm square holes, distance between hole centres 38 mm in vertically and horizontally
- Edged all round and stiffened with support members
- For heavy loads, simple wall mounting
- Perforated panels without support elements, plastic-coated
- other colours are deliverable on request: slate grey RAL 7015; traffic yellow RAL 1023; light blue RAL 5012; jet black RAL 9005


- RasterPlan support elements and tool holder for insertion in perforated sheet panels from no. 50638 300, RasterPlan easy-view storage bins see no. 50638 816-837

Notes:


workbench bracket: 2 brackets are required for one perforated panel 500-1500 mm wide, 3 brackets are required for one perforated panel 2000 mm wide, see no. 50637 738-739

Technical data:

- Distance between centre of hole and centre of hole: 38 mm
- Total thickness: 1.25 mm
- Punched-hole: 10 x 10 mm
- Material: Sheet steel



1 = vertical
2 = horizontal flexibility – the perforated plates can be inserted vertically and horizontally



3 = multiple-angled
4 = precise positioning of the underbeams
5 = back side reinforced with specially formed underbeams, spot-welded on both sides
6 = 1.25 mm sheet steel

Width (mm)	500	1000	1500	2000
Height (mm)	450	450	450	450
Colour				
50637... Traffic red RAL 3020	Ident. No. 722 ○	723 ○	724 ○	726 ○
50637... Gentian blue RAL 5010	Ident. No. 717 ●	718 ●	719 ●	721 ●
50637... Sky blue RAL 5015	Ident. No. 713 ●	714 ●	715 ●	716 ●
50637... Reseda green RAL 6011	Ident. No. 702 ●	704 ●	706 ●	708 ●
50637... Light grey RAL 7035	Ident. No. 703 ●	705 ●	707 ●	709 ●
50637... Pure white RAL 9010	Ident. No. 727 ○	728 ○	729 ○	731 ○

Prod. Gr. 5AC

Workbench bracket for perforated/slotted panels



Application:

Ident. No. 738: For attaching perforated and slotted panels to workbenches

Ident. No. 739: For attaching perforated or slotted panels to tables and workbenches on a wooden panel

Execution:

- 2 brackets are required for panels 500-1500 mm wide

50637...	For 1 panel	Ident. No.	739
			•
50637...	For 2 stacked panels	Ident. No.	738
			•

Prod. Gr. 5AC

- 3 brackets are required for panels 2000 mm wide

Ident. No. 738: For 2 stacked panels

Ident. No. 739: For 1 panel

Technical data:

- Material: Sheet steel
- Colour: Aluminium coloured



support elements for perforated plates



Ident. No. 300-303



Ident. No. 304-306



Ident. No. 307-309



Ident. No. 312-315



Ident. No. 316-320



Ident. No. 342



Ident. No. 343



Ident. No. 607-609



Ident. No. 635-637



Ident. No. 640-642

50638...	Tool holder, oblique hook end, L=50mm, Ø 6mm	Ident. No.	300
			•
50638...	Tool holder, oblique hook end, L=100mm, Ø 6mm	Ident. No.	301
			•
50638...	Tool holder, oblique hook end, L=150mm, Ø 6mm	Ident. No.	302
			•
50638...	Tool holder, oblique hook end, L=200mm, Ø 6mm	Ident. No.	303
			•
50638...	Tool holder, vertical hook end, L=35mm, Ø 6mm	Ident. No.	304
			•
50638...	Tool holder, vertical hook end, L=75mm, Ø 6mm	Ident. No.	305
			•
50638...	Tool holder, vertical hook end, L=125mm, Ø 6mm	Ident. No.	306
			•
50638...	Double tool holder, vertical hook end, L=35mm, Ø 6mm	Ident. No.	307
			•
50638...	Double tool holder, vertical hook end, L=50mm, Ø 6mm	Ident. No.	308
			•
50638...	Double tool holder, vertical hook end, L=75mm, Ø 6mm	Ident. No.	309
			•
50638...	Tool clamp Ø 10 mm	Ident. No.	312
			•
50638...	Tool clamp Ø 13 mm	Ident. No.	313
			•
50638...	Tool clamp Ø 16 mm	Ident. No.	314
			•
50638...	Tool clamp Ø 19 mm	Ident. No.	315
			•
50638...	Tool clamp double Ø 6mm	Ident. No.	316
			•
50638...	Tool clamp double Ø 10mm	Ident. No.	317
			•
50638...	Tool clamp double Ø 13mm	Ident. No.	318
			•
50638...	Tool clamp double Ø 16mm	Ident. No.	319
			•
50638...	Tool clamp double Ø 19mm	Ident. No.	320
			•
50638...	Base plate small	Ident. No.	342
			•
50638...	Base plate large	Ident. No.	343
			•

50638...	Tool terminal simple, large base plate, Ø 25mm	Ident. No.	607
50638...	Tool terminal simple, large base plate, Ø 28mm	Ident. No.	608
50638...	Tool terminal simple, large base plate, Ø 32mm	Ident. No.	609
50638...	Tool holder, straight mandrel, L=50mm, Ø 6mm	Ident. No.	635
50638...	Tool holder, straight mandrel, L=100mm, Ø 6mm	Ident. No.	636
50638...	Tool holder, straight mandrel, L=150mm, Ø 6mm	Ident. No.	637
50638...	Double tool holder, straight mandrel, L=50mm, Ø 6mm	Ident. No.	640
50638...	Double tool holder, straight mandrel, L=100mm, Ø 6mm	Ident. No.	641
50638...	Double tool holder, straight mandrel, L=150mm, Ø 6mm	Ident. No.	642

Prod. Gr. 5AC



Hook assortment

Multiple compartments, for walls with 10 x 10 mm square perforation



Application:

Individual holder for tools and parts in perforated metal plate walls with 10 x 10 mm square holes, axis distance 38 mm.

Execution:

- The hooks are simply inserted into the required hole and fixed in place with the red plastic screw

Delivery:

Screw included in scope of delivery



Ident. No. 344



Ident. No. 345



Ident. No. 649

50638...	Hook assortment, 28 pieces in set	Ident. No.	344
50638...	Hook assortment, 18 pieces in set	Ident. No.	345
50638...	Hook assortment, 10 pieces in set	Ident. No.	649

Prod. Gr. 5AC



TITALIUM™ series 54TI padlocks

With hardened steel strap

Execution:

- Lock bodies made of TITALIUM™
- Hardened steel shackle
- Double shackle locking
- Round key head

Delivery:

2 keys per lock

Technical data:

- Material of the housing: Titalium® aluminium alloy
- Material of the padlock shackle: Steel
- With corrosion protection: No
- With plastic sleeve: No
- Colour: Aluminium coloured



Model	54TI/40	54TI/50
Housing width (mm)	38	47.5
Bracket Ø (mm)	6	7
Shackle height clearance (mm)	21	24.5
Shackle width clearance (mm)	20	25
Type of closure		
Keyed different	Ident. No. 010	015

Prod. Gr. 5BF



Padlocks, series 45 and 85

Precision cylinder lock with cylinder closure mechanism

Execution:

Ident. No. 030-050:

- Lock made of solid brass, hardened steel shackle, tried-and-tested brass pin cylinder technology
- Keyed to differ, increased stability thanks to tried-and-tested double locking action
- Quick operation by snapping in the shackle without putting in key

Ident. No. 055-110:

- Lock made of solid brass, springs and interior parts made of rustproof material
- All nickel-plated steel shackles are case-hardened to protect against attacks, with NANO Protect coating for extremely high corrosion protection
- Automatic function - shackle can be snapped into place without inserting the key

- High number of truly keyed to differ locks
- An off-centre key profile increases the security of the locking mechanism from manipulation
- Ident. No. 062-064, 086-087, 106-107 with extra-high U-bar

Delivery:

2 keys per lock

Technical data:

- Material of the housing: Brass
- Material of the padlock shackle: Steel
- With corrosion protection: Yes
- With plastic sleeve: No
- Colour: Brass coloured



Ident. No. 030-050



Ident. No. 060



Ident. No. 064

Model			45/30	45/40	45/50	85/30	85/40	85/40 HB 40	85/40 HB 63	85/50
Housing width (mm)			29	39	48	30	40	40	40	50
Bracket Ø (mm)			5	6.5	7.5	5	6.5	6.5	6.5	8
Shackle height clearance (mm)			13	21	24	16.5	22.5	39	62	28.5
Shackle width clearance (mm)			14.5	20.5	25.5	16	22	22	22	28
	Type of closure									
50025...	Keyed different	Ident. No.	030	040	050	055	060	062	064	065
			●	●	●	●	●	●	●	●
50025...	Keyed alike	Ident. No.	-	-	-	080	085	086	087	090
						○	○	○	○	○
50025...	Main key system	Ident. No.	-	-	-	095	105	106	107	110
						○	○	○	○	○

Prod. Gr. 5BF



Combination locks, series 165

With adjustable numerical code

Application:

The user can quickly and easily set a personalised code and change it again whenever the lock is open. The combination is scrambled by rotating the digits after the lock has been closed.

- 3- or 4-digit code

Technical data:

- Material of the housing: Brass
- Material of the padlock shackle: Steel
- With corrosion protection: Yes
- With plastic sleeve: No
- Colour: Brass coloured



Execution:

- Lock made of solid brass
- Shackle made of steel

Model			165/30	165/40
Housing width (mm)			30	40
Bracket Ø (mm)			5	6
Shackle height clearance (mm)			25	26
Shackle width clearance (mm)			14	21.5
	Type of closure			
50025...	Keyed different	Ident. No.	230	240
			●	●

Prod. Gr. 5BF

Key cabinets

With 15 and 24 hooks

Application:

For secure, clearly arranged storage of your keys.

- Consecutively numbered key rack, cylinder lock with 2 keys

Execution:

- Economical key cabinet with gently rounded design, made of sheet steel, colour white
- Prepared for wall mounting, screws and wall plugs included

Technical data:

- With internal tables: No
- Material: Sheet steel
- Colour: White



Number of hooks (PCS)			15	24
Height (mm)			202	255
Width (mm)			157	200
Depth (mm)			75	75
50027...	Ident. No.		015	024
			●	●

Prod. Gr. 505

Key cabinets

With 1 fold-out inside panel

Application:

For secure and clearly-arranged storage of your keys.

- With high-quality brass pin cylinder lock with 2 keys

Execution:

- Prepared for wall mounting, screws and wall plugs included, consecutively numbered key racks and key register

Technical data:

- With internal tables: Yes
- Material: Sheet steel
- Colour of front: Light grey
- Colour of housing: Dark grey



Number of hooks (PCS)	57	74	108
Height (mm)	280	330	380
Width (mm)	215	245	285
Depth (mm)	70	85	105
50027... Ident. No.	057	074	108
	●	●	●

Prod. Gr. 505

MAUL Writing pad with wide clamping strip

Made from anodised aluminium, DIN A4 format

Execution:

- Wide clamping bar with powerful metal springs on the short side
- Non-slip protection on underside also protects against slipping on table tops

- High-quality and elegant: for design-focussed users

Technical data:

- Height: 340 mm
- Depth: 28 mm
- Width: 230 mm
- Grip height: 10 mm
- Board thickness: 1,5 mm
- Material: Aluminium
- Colour: Silver coloured



50006... Ident. No.	435
	●

Prod. Gr. 5AM

DURABLE Identification labels

Magnetic

Application:

For labelling metallic surfaces easily such as warehouse shelving and metal containers

Delivery:

Does not include slot-in labels

Execution:

- Made from durable polypropylene with transparent front film
- With two rear magnetic strips
- Suitable for scanning and document-quality

Notes:

Downloadable template for slot-in labels can be found at www.duraprint.de

Technical data:


- Material: PP - Polypropylene
- Colour: Blue
- Number of pieces per packet: 50

Advantage:

- Rapid replacement of slot-in labels



Ident. No. 260



Ident. No. 261



Suitable for DIN format	-	-	-	-	1 x DIN A6 (transverse)	1 x DIN A5 (transverse)	1 x DIN A4 (high)	1 x DIN A4 (transverse)
Internal width (mm)	100	150	210	297	148	210	210	297
External width (mm)	113	163	223	311	163	223	233	311
Interior height (mm)	38	67	74	74	105	148	297	210
External height (mm)	53	83	82	82	120	163	313	225
50264... Ident. No.	260	262	263	264	261	265	266	267
	●	●	●	●	●	●	●	●

Prod. Gr. 5BD


info frame with magnetic closure, self-adhesive and magnetic

Application:

Ideal for alarm plans (red), warning and safety notices (red), machine and operating instructions (blue), hazardous materials ordinances (orange), technical drawings and parts lists. Can be read from both sides on glass surfaces thanks to transparent base film.

Execution:

- Removable and reusable on smooth surfaces
- Flexible mounting: Portrait or landscape format



Ident. No. 140



Ident. No. 160-174



Ident. No. 135-146:

- Magnetic pocket made of rigid PVC film with magnetic back
- Adheres to all metallic surfaces

Ident. No. 160-179:

- Magnetic pocket made of rigid PVC film with self-adhesive reverse side
- Adheres to smooth surfaces, e.g. glass, wood or metal

Advantage:

- Quick and easy insertion/removal of documents



Version			Self-adhesive	Self-adhesive	Magnetic	Magnetic
Suitable for DIN format			A4	A3	A4	A3
Width (mm)			238	325	235	320
Height (mm)			324	445	320	450
Number of pieces per packet (PCS)			2	2	5	5
	Colour					
50006...	Black	Ident. No.	160	176	135	143
50006...	Red	Ident. No.	162	177	136	144
50006...	Blue	Ident. No.	164	178	137	145
50006...	Silver coloured	Ident. No.	168	179	138	146
50006...	Orange	Ident. No.	166	175	139	-
50006...	Yellow Black	Ident. No.	170	-	140	-
50006...	Green White	Ident. No.	172	-	141	-
50006...	Red White	Ident. No.	174	-	142	-

Prod. Gr. 5BD

Document pockets

Self-adhesive

Application:

For shipping documents and other documents.

Execution:

- Made of environment-friendly polyethylene
- Good adhesion to cardboard, metal and plastic
- Reliable protection for your accompanying documents

- In a practical dispenser box

- Packing unit: 1000 pieces, contains 250-piece packages

Technical data:

- Material: PE - Polyethylene
- Number of pieces per packet: 1000 PCS



Suitable for DIN format		C6	C6	Long	Long	C5	C5
Inscription		-	Delivery slip/ invoice	-	Delivery slip/ invoice	-	Delivery slip/ invoice
Colour		Transparent	Red Transparent	Transparent	Red Transparent	Transparent	Red Transparent
50007...	Ident. No.	364	365	366	367	368	369

Prod. Gr. 504

tarifold Hanging pockets for DIN A4

In landscape format, with metal eyelets

Application:

For the storage of multiple documents and small items.

Execution:

- Double frame
- Stable steel wire frame with plastic surround
- Large capacity, up to 210 DIN A4 sheets
- 2 highly durable metal eyelets
- Can be expanded by up to 80 mm

50006...

Ident. No.

062

Prod. Gr. 5BE

- Assorted colours: 1 red, 1 blue, 1 yellow, 1 green and 1 black
- Packing unit: 5 pieces

Technical data:

- Suitable for DIN format: A4
- Material: PVC - Polyvinyl chloride
- Colour: Multicolour
- Number of pieces per packet: 5 PCS



Order pockets for DIN A4

With Velcro closure

Application:

The order pockets made of high-strength transparent film with anti-tear protection are robustly manufactured and can be used for the sealed storage of all work documents.

Execution:

- Firmly welded Velcro fastener

Suitable for DIN format	A4	A4	A5
Colour	Blue	Red	Blue
50006...	Ident. No. 200	202	204

Prod. Gr. 5BH

- From low-maintenance plastic with stable card-board insert
- Extra-robust design

Technical data:

- Material: Plastic
- Number of pieces per packet: 10 PCS



DURABLE Document pocket for pallet base

With 4 plug-in pockets

Application:

For labelling pallet bases and affixing bar codes, RFID transponders etc.


Execution:

- Blue back sheet and transparent front sheet made from durable rigid film
- Pockets on all 4 sides
- Mounted using velcro

- Internal dimensions: W x H 140 x 65 mm/90 x 65 mm
- Colour blue
- Packing unit 50 pieces

Advantage:

- With thumb slot for easy insertion of slot-in labels
- Easy and straightforward to affix using velcro
- Efficient labelling of pallets

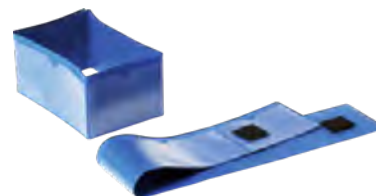

50006...

Ident. No.

211

Prod. Gr. 5BD

Document pocket with wire brush In DIN format

Application:

For labelling transport containers, crates, wooden stacking frames and pallet boxes.

Execution:


- Blue back sheet and transparent front sheet made from durable polypropylene
- With galvanised flexible wire hanger for simple and secure fixing
- Suitable for scanning and document-quality

Advantage:

- Practical rain protection flap protects the documents from dust and moisture
- Rapid replacement of slot-in labels

Technical data:

- Number of pieces per packet: 50 PCS



Ident. No. 221



Ident. No. 223



	Suitable for		
50006...	DIN A5 (transverse)	Ident. No.	221
50006...	DIN A4 (high)	Ident. No.	223
50006...	DIN A4 (transverse)	Ident. No.	225

Prod. Gr. 5BD

Document pockets with fold

Application:

Ideal for affixing information to boxes or pallet frames. Also ideal for inserting between stacked boxes.

Execution:


- Blue back sheet and transparent front sheet made from durable rigid film
- Document protected by 3 closed sides
- Suitable for scanning and document-quality

Advantage:

- Rapid replacement of slot-in labels

Technical data:

- Colour: Blue
- Number of pieces per packet: 50 PCS



Ident. No. 231



Suitable for DIN format	1 x DIN A5 (transverse)	1 x DIN A6 (transverse)	1 x DIN A4 (transverse)
Internal width (mm)	210	148	297
External width (mm)	230	168	317
Interior height (mm)	148	105	210
External height (mm)	259	216	321
50006...	Ident. No.	231	233
		235	

Prod. Gr. 5BD

DURABLE Wall view panel system Including DIN A4 clear view panels

Application:

For attachment to walls and for holding DIN A4 clear view panels.

Execution:

- Clear view panels made of polypropylene, waterproof, scannable

Advantage:

- Quick and easy insertion/removal of documents
- Clear view panel protects the document

Delivery:

Incl. DIN A4 clear view panels and fastening materials

Notes:

For individual clear view panels, see no. 50006 191-195

Technical data:

- Suitable for DIN format: A4
- Colour of holder: Light grey RAL 7035
- Material of the frame: Steel plate
- Surface: Powder-coated



Ident. No. 182



Ident. No. 184



Ident. No. 187



Number of clear tables (PCS)		5	5	5	10	20
Clear table colour		Red	Blue	Orange	Red Blue Yellow Green Black	Red Blue Yellow Green Black
50006...	Ident. No.	180	182	184	187	189

Prod. Gr. 5BD

DURABLE Wall view panel system magnetic, including 5 DIN A4 clear view panels

Application:

For attachment to magnetic surfaces such as steel beams or shelves

Execution:

- Black clear view panel made of polypropylene, waterproof, scannable

Advantage:

- Quick and easy insertion/removal of documents
- Clear view panel protects the document

Delivery:

Incl. 5 clear view panels DIN A4

Notes:

For individual clear view panels, see no. 50006 191

Technical data:

- Suitable for DIN format: A4
- Number of clear tables: 5 PCS
- Clear table colour: Black
- Colour of holder: Light grey RAL 7035
- Material of the frame: Steel plate
- Surface: Powder-coated



50006...	Ident. No.	190
----------	------------	-----

Prod. Gr. 5BD

Accessories for		50006 190
50006... Clear view panels For wall view panel holders no. 50006 180-190, black/5 pieces	Ident. No.	191



Relax-Plus foot rest

made of shatterproof polystyrene



Application:

the foot platform can be positioned using the buttons on the rounded side panels. the angle of the footrest can be infinitely adjusted by gently applying pressure with your foot and is supported by a micro-grid.

Execution:

- adjustable to 4 height levels
- foot platform 45 x 35 cm

- floor protectors prevent slipping

Technical data:

- Length x width x height: 52 x 35 x 14 cm
- Material: Impact-resistant polystyrene - HIPS
- Adjustable in height: 4 steps
- Colour: Light grey (bright grey)
- Height adjustment: 5-7-9 and 11 cm
- Surface structure: Ribbed



50130...

Ident. No.

510

Prod. Gr. 505



Trittboy footrest

sturdy steel tube, nickel-plated



Application:

sturdy bright nickel-plated steel pipe design (pipe diameter 19 mm). the shatter-proof plastic foot platform can be adjusted.

Execution:

- adjustable to 4 height levels
- foot platform 29.0 x 8.9 cm
- four rubber feet ensure excellent stability

Technical data:

- Length x width x height: 34.5 x 33.5 x 16.5 cm
- Material: Steel pipe
- Adjustable in height: Yes
- Material tread: Shatterproof plastic
- Height adjustment: 6-14.5 cm
- Color tread plate: Black
- Pipe diameter: 19 mm
- Surface: Nickel-plated



50130...

Ident. No.

515

Prod. Gr. 505

MAUL Swivelling drawing holder

For table-top mounting, DIN A1

Application:

For the presentation of information in various formats: billboards, posters, printing proofs, technical drawings, flipchart sheets

Execution:

- Silver anodised support column can be extended up to 1200 mm above the table
- Aluminium swivel arm DIN A1 (1000 mm) with 3 movable magnet clips
- Arm with integrated brake for any height adjustment required
- Arm suspendable on both sides
- Clamp base for table tops up to 60 mm thickness

Advantage:

- Expandable to up to 4 arms
- When not in use, the arms can be folded to save space
- Templates are simply inserted and firmly click-hanging using one hand

Technical data:

- Suitable for DIN format: A1
- Number of arms: 1 PCS
- Max. height: 1200 mm
- Pivot arm length: 1000 mm
- Number of magnets: 3 PCS
- Material: Aluminium-plastic
- Colour: Grey
- Surface: Anodised



50006...

Ident. No.

378

Prod. Gr. 5AM

MAUL Standard flipchart

Application:

Can be used as a whiteboard.

Execution:

- Panel made of melamine resin sheet with special coating on the front, dry-wipe
- Height-adjustable from 1100–1860 mm, lockable with screws
- With plastic storage tray for flipchart accessories, markers, etc., cover cap of shatter-proof plastic
- Cover cap with recessed handle
- Horizontally movable pad holders

- Round-tubed legs, cover panel made of shatter-proof plastic
- Accessories: Flipchart markers ref. no. 326–330, flipchart paper ref. no. 398

Technical data:

- Height: 970 mm
- Min. height: 1100 mm
- Max. height: 1860 mm
- Width: 660 mm
- Magnetic/adhesive: No
- With storage tray: Yes
- With rollers: No
- Table material: Melamine resin



50006...

Ident. No.

316

Prod. Gr. 5AM

MAUL Mobile flipchart

Infinitely height adjustable

Application:

Can be used as a magnetic board and whiteboard.

Execution:

- Panel made from melamine resin sheet and plastic-coated steel sheet, dry-wipe
- Star foot made of shatter-proof plastic
- Infinitely height-adjustable from 1780 to 1960 mm
- 5 locking rollers for ease of movement
- Two magnetic paper holders, can be folded to the side
- With storage tray and protective cap made of unbreakable plastic
- Horizontally movable pad holders

- Accessories: Flipchart markers ref. no. 326–330, flipchart paper ref. no. 398

Technical data:

- Height: 970 mm
- Min. height: 1780 mm
- Max. height: 1960 mm
- Width: 660 mm
- Magnetic/adhesive: Yes
- With storage tray: Yes
- With rollers: Yes
- Number of rolls: 5 PCS
- With wheel lock: Yes
- Table material: Melamine resin/plastic-coated sheet steel



50006...

Ident. No.

320

Prod. Gr. 5AM

MAUL Flipchart marker

Sorted by colour

Execution:

- Luminescent colours
- Quick drying
- Does not bleed through the following pages
- 4-colour assortment: black, green, red and blue

Technical data:

- Colour: Black | Green | Red | Blue
- Number of pieces per packet: 4 PCS

Shape of tip	Round tip	Chisel tip	Round tip
Min./max. line thickness	2-2.5 mm	3-6 mm	2.5-3 mm
50006...	Ident. No. 326	328	330

Prod. Gr. 5AM



MAUL Flipchart paper

Execution:

- Flipchart paper
- 80 g paper, 25mm grid

Delivery:

20 sheets per block

Technical data:

- Height: 980 mm
- Width: 675 mm
- Grammage: 80 g/m²
- Colour: White
- Number of pieces per packet: 5 PCS



50006...

Ident. No.

398

Prod. Gr. 5AM

MAUL Whiteboard

Magnetic, dry-wipe

Application:

Can be used as a magnetic board and whiteboard

Execution:

- Work surface made of sheet steel, plastic-coated
- frame made of silver-anodised aluminium, subtle profile in combination with corner connectors in grey
- Sliding storage tray made from aluminium
- Can be used in either portrait or landscape format

- Accessories: For board markers, wipers, magnets, see no. 50006 394, 50006 302, 50006 370-372, 51161 010-190

Delivery:

Incl. fastening materials, also available with cork surface: see ref. no. 356-362

Technical data:

- Magnetic/adhesive: Yes
- Material of framework: Aluminium
- Frame surface: Anodised silver
- Surface: Plastic-coated



Height (mm)		450	600	900	1000
Width (mm)		600	900	1200	1500
50006...	Ident. No.	386	388	390	392
		●	●	●	●

Prod. Gr. 5AM

MAUL Whiteboard accessories set

including marker pens, magnets and much more

Execution:

- In a practical storage box, 305 x 240 x 60 mm
- Organisation system provided by moulded interior

5 grey spherical magnets diameter 30 mm

Technical data:

- Length: 305 mm
- Width: 240 mm
- Height: 60 mm

Delivery:

4 board markers; 1 board wiper; 10 pieces of board wiper fleece; 1 bottle of whiteboard cleaner 250 ml;

50006...	Ident. No.	394
		●

Prod. Gr. 5AM



ORION® Organising magnets

Application:

For fixing drawings and other paper documents to magnetic surfaces.

Execution:

- Magnetic clamp with coloured plastic cap



Outer Ø (mm)			20	25	30	34
	Colour					
51161...	Blue	Ident. No.	010	060	110	155
			●	●	●	●
51161...	Yellow	Ident. No.	020	070	120	160
			●	●	●	●
51161...	Red	Ident. No.	030	080	130	170
			●	●	●	●
51161...	Black	Ident. No.	040	090	140	180
			●	●	●	●
51161...	White	Ident. No.	050	100	150	190
			●	●	●	●

Prod. Gr. 591

Job pockets for DIN A4

With Velcro closure

Application:

The order pockets made of high-strength transparent film with anti-tear protection are robustly manufactured and can be used for the sealed storage of all work documents.

- From low-maintenance plastic with stable card-board insert
- Extra-robust design

Technical data:

- Material: Plastic
- Number of pieces per packet: 10 PCS



Suitable for DIN format	A4	A4	A5
Colour	Blue	Red	Blue
50006...	200	202	204
	●	●	●

Prod. Gr. 58H

Table dispenser for adhesive tape

Made from sheet steel

Application:

Allows adhesive strips to be torn off easily and rapidly.

Execution:

- Made of painted sheet steel
- Attached with a screw clamp

- For one or two adhesive tapes
- For tape width 50 mm (2 x 25)
- Made of sheet steel
- Dark blue

Advantage:

- Robust and securely attached to the table



50007...

Ident. No.

324



Prod. Gr. 586



Table dispenser for adhesive tape

For rolls up to 25 mm width

Application:

Allows adhesive tape to be conveniently torn off.

Execution:

- Elegant design
- Non-slip and stable

50007...

Ident. No.

454



Prod. Gr. 586

Accessories for		50007 454
50007...	Adhesive tape 72 rolls	Ident. No. 455
		○



Adhesive tape

72 rolls

Execution:

- Thickness 45 µm

- Length per roll 66 m
- Width 25 mm

50007...

Ident. No.

455



Prod. Gr. 586

Hand dispenser for adhesive tapes

Ideal for permanent use

Application:

For use with packaging adhesive tapes with a length of up to 66 m and width of 50 mm.

Execution:

- With notch trigger
- Two pressure rollers
- Extremely robust

69772...

Ident. No.

601



Prod. Gr. 686



Scotch HE 180 hand roller

For Scotch® PVC adhesive packaging tape 6890

69772...

Ident. No.

650



Prod. Gr. 6RM



3M Scotch® PVC packaging adhesive tapes 6890

High-quality, low-noise packaging tape

Execution:

- Humidity-resistant and resistant to chemicals

Advantage:

- Silent unrolling
- Can be torn off by hand

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Width of tape x length of strap: 50 mm x 66 m
- Thickness: 0.05 mm
- Type of adhesive: Natural rubber
- Adhesive tape backing material: PVC
- Breaking elongation: 75 %



Ident. No. 485



Ident. No. 490

Colour		Brown	Transparent
69772...	Ident. No.	485	490
		●	●

Prod. Gr. 6RM

3M Fabric adhesive tape 2903

Application:

For bundling, packaging, connecting, sealing, protecting and colour coding products.

Advantage:

- Very good adhesion on different surfaces
- Fabric allows straight, tool-free tearing off in both longitudinal and transverse directions
- Can easily be torn by hand
- Good mouldability of the backing material for use on uneven surfaces

Notes:

we recommend that you request the safety data sheet with your first order.

Technical data:

- Type description: 2903
- Width of tape x length of strap: 48 mm x 50 m
- Thickness: 0.15 mm
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated fabric
- Breaking elongation: 30 %



Ident. No. 111



Ident. No. 121

Colour		Black	Silver
69771...	Ident. No.	111	121
		●	●

Prod. Gr. 6RM

3M UV-resistant premium fabric adhesive tape 8979

Can be removed up to 6 months later without leaving residue

Application:

For reinforcing, bundling, sealing, insulating, splicing, marking.

Advantage:


- Can be removed up to 6 months later without leaving residue
- UV resistant and can be used outdoors for up to 12 months
- Moisture-resistant

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Width of tape x length of strap: 48 mm x 48 m
- Thickness: 0.33 mm
- Colour: Blue
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated fabric
- Breaking elongation: 21 %



69771...	Ident. No.	180
		●

Prod. Gr. 6RM

3M Premium fabric adhesive tapes 389

Temperature-resistant up to 70 °C, watertight, very high long-term adhesive force

Application:

For industrial applications such as marking, strengthening, repairing, sealing joints and air-conditioning ducts, bundling pipes, materials etc.

Execution:

- Close-meshed fabric adhesive tape with matt surface

Advantage:

- Excellent adhesive strength on a variety of surfaces
- Outstanding moisture resistance
- Adapts easily for use on uneven surfaces

- Good tear resistance and flexibility

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Width of tape x length of strap: 50 mm x 50 m
- Thickness: 0.26 mm
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated rayon fabric
- Breaking elongation: 6 %



Ident. No. 220



Ident. No. 230

Colour		Silver grey	Black
69771...	Ident. No.	220	230
		●	●

Prod. Gr. 6RM

3M Double-sided adhesive tape 9527

Synthetic rubber adhesive tape with high initial tack

Application:

For gluing sheet material such as foam, rubber or felt.

Execution:

- Synthetic rubber adhesive
- With paper fleece backing

Advantage:

- Excellent immediate adhesion
- Easily soluble protective paper
- Good adhesion on low-energy materials

- Temperature resistant up to 50°C

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Type description: 9527
- Width of tape x length of strap: 50 mm x 50 m
- Colour: White
- Breaking elongation: 0 %



69771...	Ident. No.	310
		●

Prod. Gr. 6RM

3M Double-sided adhesive assembly tape

Holds up to 10 kg/m

Application:

For fast, secure, invisible fixings both indoors and outdoors.

Advantage:

- UV-resistant

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Type description: Assembly power
- Width of tape x length of strap: 19 mm x 5 m
- Colour: Grey
- Type of adhesive: Acrylate
- Breaking elongation: 0 %



69771...	Ident. No.	330
		●

Prod. Gr. 6RM

3M Warning marking tape 766i/767i

All-purpose soft PVC adhesive tape for use on many surfaces

Application:

For marking, barricading, bundling, protecting and covering. Also suitable for making the floor. Ideal for indicating hazards.

Execution:

- Highly elastic backing material

Advantage:

- Solvent-resistant


- High initial adhesive strength
- Supple even on uneven surfaces

Notes:

We recommend you request the safety data sheet with your first order.

Technical data:

- Width of tape x length of strap: 50 mm x 33 m
- Breaking elongation: 180 %



Ident. No. 505



Ident. No. 515

Type description		766i	767i
Colour		Black Yellow	Red White
69772...	Ident. No.	505	515
		●	●

Prod. Gr. 6RM

Document pockets

Self-adhesive

Application:

For shipping documents and other documents.

Execution:

- Made of environment-friendly polyethylene
- Good adhesion to cardboard, metal and plastic
- Reliable protection for your accompanying documents

- In a practical dispenser box

- Packing unit: 1000 pieces, contains 250-piece packages

Technical data:

- Material: PE - Polyethylene
- Number of pieces per packet: 1000 PCS



Suitable for DIN format		C6	C6	Long	Long	C5	C5
Inscription		-	Delivery slip/ invoice	-	Delivery slip/ invoice	-	Delivery slip/ invoice
Colour		Transparent	Red Transparent	Transparent	Red Transparent	Transparent	Red Transparent
50007...	Ident. No.	364	365	366	367	368	369
		○	○	○	○	○	○

Prod. Gr. 504

NT Cutter® Safety carton opener

Application:

For opening cardboard boxes, undoing packaging straps and films, and for pulling out packaging staples.

Execution:

- High-quality, ergonomically shaped plastic handle

Length (mm)	195
Width of knife blade (mm)	10
53651...	Ident. No.
	010
	●

Prod. Gr. 566

Accessories for			53651 010
53651...	Spare blades, pack of 10	Ident. No.	100
			●

- Replaceable blade

Advantage:

- Metal bow with internal blade protects the package contents from being damaged



Foil bag

Made from PE, with press-down closure and labelling field

Application:

For storing small parts.

Execution:

- Resealable and reusable
- Made of polyethylene

Advantage:

- Can be re-used

- High transparency
- Food-grade
- Robust

Technical data:

- Foil thickness: 50 µm
- Colour: Transparent
- Number of pieces per packet: 1000 PCS



Length (mm)	100	150	170	220	300
Width (mm)	70	100	120	160	200
50007...	Ident. No.	500	501	502	503
		●	●	●	●

Prod. Gr. 586

Foil bag

Made from PE, with press-down closure

Application:

For storing small parts.

- High transparency
- Food-grade
- Robust

Execution:

- Resealable and reusable
- Made of polyethylene
- Packing unit: 1000 pieces

Technical data:

- Foil thickness: 50 µm
- Colour: Transparent
- Number of pieces per packet: 1000 PCS



Advantage:

- Can be re-used

Length (mm)		100	120	150	170	220	220	250	300
Width (mm)		70	80	100	120	150	160	180	200
50007...	Ident. No.	530	531	532	533	534	535	536	537
		●	●	●	●	●	●	●	●
Length (mm)		310	350	450					
Width (mm)		220	250	350					
50007...	Ident. No.	538	539	540					
		●	●	●					

Prod. Gr. 586

Packing foam film

On roll, made from PE

Application:

For protecting edges and surfaces and as insulation and padding. Anti-slip insert layer, insulating and vibration-reducing.

Advantage:

- Many different uses, elastic, flexible
- Odour-neutral, water-resistant
- Dirt-resistant, dust-free, lightweight and heat-sealable
- Excellent padding properties

Execution:

- Closed-cell, non-polymerised, foamed white padding material made of LDPE (Low Density Polyethylene)
- Extremely resistant to solvents, fuels, oils and other chemicals
- CFC-free foamed, colour white

Technical data:

- Width: 1250 mm
- Colour: White



Length (m)		500	350	250	175	100
Material thickness (mm)		1.0	1.5	2.0	3.0	5.0
50007...	Ident. No.	557	558	559	576	577
		○	○	○	○	○

Prod. Gr. 504

Air bubble film, perforated

On roll, made from PE

Application:

For secure packaging, for use as padding and protection for large, impact- and pressure-sensitive goods and scratch-sensitive areas.

- Perforated every 400 mm

Technical data:

- Length: 100 m
- Material: PE - Polyethylene

Execution:

- Thickness 75 µ

Width (mm)		500	1000
50007...	Ident. No.	590	591
		●	●

Prod. Gr. 586



Air bubble film in dispenser box

On roll, made from PE

Application:

For secure packaging, for use as padding and protection for large, impact- and pressure-sensitive goods and scratch-sensitive areas.

- Lightweight and safe padding material
- Tough, tear-resistant, waterproof, sealable

Delivery:

2 boxes with 1 roll each

Execution:

- Modern two-layered material of high-quality, environmentally friendly plastic
- Many small air bubbles absorb impact and pressure
- Tough, tear-resistant, waterproof, sealable, dust-resistant and watertight
- Insulates against extreme cold and heat

Technical data:

- Number of plies: 2 PCS
- Foil thickness: 0.8 mm
- Length: 0.05 m
- Width: 285 mm
- Bubble diameter: 10 mm
- Material: PE - Polyethylene



Advantage:

- For simple and versatile use

50007...	Ident. No.	594
		○

Prod. Gr. 586

Packing foam film in dispenser box

On roll, made from PE

Application:

For protecting edges and surfaces and as insulation and padding. Anti-slip insert layer, insulating and vibration-reducing.

Execution:

- On rollers, perforated at every 300 mm

Advantage:

- Many different uses, elastic, flexible
- Odour-neutral, water-resistant

- Dirt-resistant, dust-free, lightweight and heat-sealable
- Excellent padding properties

Delivery:

2 boxes with 1 roll each

Technical data:

- Length: 0.08 m
- Width: 285 mm
- Material thickness: 2.0 mm
- Colour: White



50007...

Ident. No.

595

Prod. Gr. 586

Air bubble film

On roll, made from PE

Application:

For secure packaging, for use as padding and protection for large, impact- and pressure-sensitive goods and scratch-sensitive areas.

Execution:

- Modern two-layered material of high-quality, environmentally friendly plastic
- Many small air bubbles absorb impact and pressure
- Tough, tear-resistant, waterproof, sealable, dust-resistant and watertight
- Insulates against extreme cold and heat

Advantage:

- For simple and versatile use
- Lightweight and safe padding material
- Tough, tear-resistant, waterproof, sealable
- Physiologically safe pursuant to Food Safety Act

Technical data:

- Number of plies: 2 PCS
- Bubble diameter: 10 mm
- Material: PE - Polyethylene



Foil thickness (µm)		60	75	75	75	75	125	100	125	75
Length (m)		100	100	100	50	100	50	100	100	50
Width (mm)		1200	1000	1200	1200	1500	1200	1200	1200	500
Number of pieces per packet (PCS)		1	1	1	1	1	1	1	1	3
50007...	Ident. No.	586	588	589	592	593	596	597	598	587
		○	○	○	○	○	○	○	○	○

Prod. Gr. 504

Set of mini rolls of stretch film

30 rolls, stretched, 10 µm thick

Application:

For bundling, fixing, sealing and binding.

Execution:

- Pre-stretched mini hand-stretch film

Advantage:

- For universal use
- Easy to use
- Environmentally friendly due to lack of cardboard core

- Integrated thumb brake for optimum tensioning

Delivery:

Including 2 dispensers and cardboard box with 30 rolls each

Technical data:

- Foil thickness: 10 µm
- Length: 300 m
- Width: 85 mm
- Colour: Transparent



50007...

Ident. No.

641

Prod. Gr. 504

Stretch film, mini roll set

40 rolls, 20 µm thick

Application:

For bundling, fixing, sealing and binding.

Execution:

- Traditional mini hand-stretched film

Advantage:

- For universal use
- Easy to use
- Integrated thumb brake for optimum tensioning

Delivery:

Including 1 dispenser and cardboard box with 40 rolls each

Technical data:

- Foil thickness: 20 µm
- Length: 150 m
- Width: 100 mm
- Colour: Transparent



50007...

Ident. No.

642

Prod. Gr. 504

Hand dispenser for stretch films

Application:

For manual stretching over pallets.

Execution:

- Easily adjustable resistance brake
- Chrome-plated

50007... Ident. No. 676
○

Prod. Gr. 504

- For a roll of up to 500 mm width

Advantage:

- Rapid, simple and safe handling of stretch films
- Avoid „hot hands“



Hand roller (without film)

Stretch foil for unrolling by hand

On roll, stretched, 500 mm wide

Application:

For the securing of loads on pallets, protection against damp, dirt and dust. Can be used as a wrapping or banding foil.

Execution:

- Stretch film optimally pre-stretched by machine
- Turned film edges to increase resistance
- Slippery outer side available in order to avoid pallets sticking to each other in trucks
- Must be wound with only minimal tension
- Reset forces are released after unwrapping (memory effect)
- Increased puncture resistance combined with reduced film thickness
- Good adhesion properties, high transparency, good tear propagation strength

50007... Ident. No. 639
○

Prod. Gr. 504

Advantage:

- Easier to use since rolls are extremely light
- Avoids fatigue-inducing bending
- Higher working speed and less effort required
- Improved load unit securing thanks to higher retention forces
- Prevents pallets from sticking to each other

Technical data:

- Foil thickness: 8 µm
- Length: 600 m
- Width: 430 mm
- Colour: Transparent
- Number of pieces per packet: 6 PCS



OLFA Plastic film cutter

Application:

For cutting close-fitting film without damaging the material underneath.

Execution:

- Safety knife has one blade

Length (mm)	160
Width of knife blade (mm)	10

53651... Ident. No. 200
●

Prod. Gr. 566

- Ergonomically shaped plastic handle

Advantage:

- Blade is easy to replace using snap-open mechanism



Accessories for		53651 200
53651... 10	Spare blades, pack of	Ident. No. 210 ●

Stretch film for mechanical dispensing

On roll, made from LLDPE, 500 mm wide

Application:

For wrapping goods on pallets on all semi- and fully-automated stretch systems. Protection from damp, dirt, dust or theft.

Execution:

- Machine stretch film made of LLDPE (Linear Low Density Polyethylene) with good adhesion (one-sided)
- High transparency, good tear propagation strength and good stretchability
- Thin but with good puncture resistance

Foil thickness (µm)	17	20	23
Length (m)	2100	1800	1550
50007...	Ident. No. 645 (○)*	649 (○)*	653 (○)*

Prod. Gr. 504

- Environmentally compatible and recyclable

Advantage:

- Economical way of securing pallets
- Excellent mechanical properties
- Secures pallets reliably

Technical data:

- Width: 500 mm
- Colour: Transparent
- Number of pieces per packet: 30 PCS

