LED inspection lamps made from aluminium

Application:
For lighting and inspecting partly concealed areas

Execution:
- Protected against splash water, IP67
- Includes battery
- **Ident. No. 005:**
  - Flexible shaft coated in plastic
  - Magnetic head, 9.8 mm
  - With 1 round mirror
- **Ident. No. 005–010:** White LED, 0.15 W
- **Ident. No. 010:**
  - Magnetic head, 15 mm
  - With round and rectangular mirrors
- **Ident. No. 010–020:** Flexible shaft
- **Ident. No. 020:**
  - White, extremely bright LED, 1.2 W
  - Head, 22 mm
  - With rectangular mirror

Advantage:
- **Ident. No. 020:** Handle can also be converted to a torch

Ident. No. 005

Ident. No. 010

Ident. No. 020

Model		medusa S-1	medusa M-2	olympus I
Ø of mirror (mm)		30	30	-
Width of mirror (mm)		-	43	43
Mirror height (mm)		-	65	65
Max. extension length (mm)		455	680	570
52985...	Ident. No.	**005**	**010**	**020**
		●	●	●

Prod. Gr. 576

Inspection mirrors

Application:
For inspecting partly concealed areas.

Execution:
- **Ident. No. 110:** 2 pcs, in plastic
- **Ident. No. 120:** In metal, 2 pcs with handle
- **Ident. No. 210–220:** Telescopic inspection mirror with handle, extendible, secured against twisting

Ident. No. 110

Ident. No. 120

Ident. No. 210–220

Ø of mirror (mm)		24	30	30	50
Max. extension length (mm)		260	210	680	680
52995...	Ident. No.	**110**	**120**	**210**	**220**
		●	●	●	●

Prod. Gr. 580

ORION® Telescopic inspection mirrors

Application:
For inspecting partly concealed areas.

Execution:
- **Ident. No. 270:**
  - Chrome-plated metal handle
  - With attachment clip
- **Ident. No. 270–280:** Round mirror
- **Ident. No. 280–290:** Plastic-coated metal handle
- **Ident. No. 290:** Rectangular mirror, mirror dimensions 43 x 65 mm

Ident. No. 270

Ident. No. 280

Ident. No. 290

Ø of mirror (mm)		30	50	43
Max. extension length (mm)		520	730	720
52995...	Ident. No.	**270**	**280**	**290**
		●	●	●

Prod. Gr. 598

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

LED inspection lamp

Application:
For lighting and inspecting partly concealed areas.

Execution:
- Flexible shaft, 8 mm in diameter
- Head part: 10.5 mm

Delivery:
Lamp with shaft, ring magnet, round mirror 30 mm, rectangular mirror 65 x 43 mm, 2 x LR03 AAA batteries

Width of mirror (mm)		43
Mirror height (mm)		65
Max. extension length (mm)		600
52995...	Ident. No.	300 ●

Prod. Gr. 580

Telescopic pick-up magnet

Application:
For lifting and picking up small magnetic objects.

Execution:
- Retention force 3 kg
- Neodymium bar grip 13 x 20 mm
- Extension length: 260-700 mm

Head Ø (mm)		13
52995...	Ident. No.	320 ●

Prod. Gr. 580

ORION® Inspection set
Modular system

Application:
For all inspection tasks.

Execution:
- In case with impact-resistant foam inlay

Delivery:
2 mirrors (round 60 mm, rectangular 65 x 43 mm), telescopic handle, LED inspection lamp, magnetic attachment, batteries

Ø of mirror (mm)		60
Width of mirror (mm)		43
Mirror height (mm)		65
Max. extension length (mm)		600
52995...	Ident. No.	500 ●

Prod. Gr. 598

HAZET Stethoscope

Application:
For localising defective parts such as shafts, bearings and gears etc.

Execution:
- Steel tip 180 mm
- Quick-transfer membrane

Length (mm)		1080
52997...	Ident. No.	010 ●

Prod. Gr. 569

Claw gripper with 3 claws

Application:
For gripping hard-to-reach parts.

Technical data:
- Surface: Chrome-plated

Ident. No. 110

Ident. No. 120

Ident. No. 130

Length (mm)		170	500	540
Version		Inflexible	Flexible shaft	Flexible shaft
52998...	Ident. No.	110 ●	120 ●	130 ●

Prod. Gr. 580

Magnetic angle setting device

MAG-FIX

Application:
For joining flat, curved and round iron components with angular accuracy; simple to remove by tilting on side.

Execution:
- Permanent magnet with excellent retention force

Advantage:
- No maintenance required at all; all that is needed is to keep the contact surfaces clean

Width of side (mm)		14
Limb length (mm)		85/85
Angle (Degree)		90
51129...	Ident. No.	015
		●

Prod. Gr. 592

Magnetic welding angle 90°, fixed

Application:
for firmly securing sheet metal, panels, flat and angular steel parts, profiles.

Execution:
- No deflection of the light arc
- ref. no. 120 For holding round parts such as pipes and bars

Welding angle

Width of side (mm)			38	45	45	48
Limb length (mm)			115/105	145	150	260/175
Angle (Degree)			90	90	90	90
51129...	Standard design	Ident. No.	100	110	120	130
			●	●	●	●
51129...	50% increased adhesive force	Ident. No.	160	170	-	180
			●	●		●

Prod. Gr. 592

Magnetic welding bracket

Adjustable and switching ON and OFF

Application:
For holding materials to be welded.

Execution:
- Each arm can be switched on/off separately

Advantage:
- Pole shoes with V-block suitable for flat and round materials
- The magnetic force is continuously controlled

Width of side (mm)			38	45
Limb length (mm)			135	190
51129...	Ident. No.		425	450
			●	●

Prod. Gr. 592

Permanent magnetic Vee block

Individually and in a set

Application:
For securing and straightening irregularly shaped magnetic components.

Execution:
- Three magnetic contact surfaces that can be activated/deactivated together

Delivery:
In robust wooden storage box

Length x width x height			100 x 70 x 95 mm
Min./max. workpiece Ø			6-70 mm
51130...	Individual	Ident. No.	510
			●
51130...	Pair	Ident. No.	610
			●

Prod. Gr. 592

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Permanent magnet, switchable

Individually or as a pair connected by a hinge

Application:
For securing sheet metal, round and flat materials at any desired angle.

Execution:
- **Ident. No. 510:** Individual magnetic V-block, switchable
- **Ident. No. 610:**
  - Comprises 2 magnetic V-blocks connected by joint
  - Magnetic blocks can be activated/deactivated individually

Ident. No. 510

Ident. No. 610

Length x width x height			62 x 50 x 55 mm
Min./max. workpiece Ø			10-50 mm
51132...	Single magnetic block	Ident. No.	510 ●
51132...	Magnetic block pair	Ident. No.	610 ●

Prod. Gr. 592

Permanent magnetic clamping block

Application:
For magnetic clamping of round and rectangular workpieces.

Execution:
- Three magnetic contact surfaces
- Top features a cross-over V-block and two lateral areas
- Parallelism tolerance: 0.015 mm
- Right-angle tolerance: 0.025 mm

Advantage:
- Magnetic hold can be continuously adjusted using the rotary switch

Length x width x height		100 x 100 x 100 mm
Min./max. workpiece Ø		2-20 mm
51136...	Ident. No.	**500** ●

Prod. Gr. 592

Permanent magnetic joint

Application:
As welding aid for securing sheet metal, flat steel etc.

Execution:
- Two permanent magnetic blocks joined by struts

Advantage:
- Any angle can be set, secured in place using two wing screws

Length x width x height		60 x 26 x 25 mm
51139...	Ident. No.	**510** ●

Prod. Gr. 592

Permanent magnetic hand strap-on magnet

Application:
For lifting sheet metal.

Execution:
- With belts

Length (mm)		60
51140...	Ident. No.	**600** ●

Prod. Gr. 592

ORION® Flat magnetic grips
Without threaded pin

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- With hard ferrite core
- Surface galvanised
- Magnetic shielding
- Without threaded pin
- Operating temperature up to 100°C

Technical data:
- Outer diameter: 80 mm
- Height: 18 mm
- Adherence strength: 550 N

51143...	Ident. No.	**590** ●

Prod. Gr. 591

ORION® Flat magnetic grips
With threaded bush

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- With hard ferrite core
- Surface galvanised
- Magnetic shielding
- With threaded bush
- Operating temperature up to 100°C

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Outer Ø (mm)		10	13	16	20	25	32	40	50	63	80	100
Height (mm)		11.5	11.5	11.5	13	15	15	18	22	30	34	42
Height of the base (mm)		4.5	4.5	4.5	6	7	7	8	10	14	18	22
Adherence strength (N)		5	12	30	40	49	90	130	220	300	550	900
Thread dimension		M3	M3	M3	M3	M4	M4	M5	M6	M8	M10	M12
Thread length (mm)		7	7	7	7	8	8	10	12	16	16	20
51145...	Ident. No.	**500**	**510**	**520**	**530**	**540**	**550**	**560**	**570**	**580**	**590**	**600**
		●	●	●	●	●	●	●	●	●	●	●

Prod. Gr. 591

ORION® Flat magnetic grips

With bore hole and countersink

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- With hard ferrite core
- Surface galvanised
- Magnetic shielding
- With bore hole and countersink
- Operating temperature up to 100°C

Advantage:
- Fastening option from inside with a screw

Outer Ø (mm)		16	20	25	32	40	50	63	80
Height (mm)		4.5	6	7	7	8	10.5	14	18
Bore Ø (mm)		3.5	4.2	5.5	5.5	5.5	6.5	6.5	6.5
Adherence strength (N)		30	40	49	90	130	180	290	540
51146...	Ident. No.	**720**	**730**	**740**	**750**	**760**	**770**	**780**	**790**
		●	●	●	●	●	●	●	●

Prod. Gr. 591

ORION® Magnetic bar grips

Round, with an AlNiCo core

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- With AlNiCo core
- Magnet encased in steel
- Operating temperature up to 450°C
- Fastening option: Press in, shrink or glue in place
- Smooth exterior surface with h6 fit tolerance

Outer Ø (mm)		6	8	10	13	16	20	25	32	40	50
Height (mm)		10	12	16	18	20	25	30	35	45	50
Adherence strength (N)		6	10	14	27	36	72	90	100	130	200
51148...	Ident. No.	**500**	**510**	**520**	**530**	**540**	**550**	**560**	**570**	**580**	**590**
		●	●	●	●	●	●	●	●	●	●

Prod. Gr. 591

ORION® Magnetic bar grips

Round, with an AlNiCo core

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- With AlNiCo core
- Magnet encased in steel
- Operating temperature up to 450°C
- With female thread
- Fastening option: Screws

Outer Ø (mm)		6	7	10	13	16	20	25	32
Height (mm)		20	20	20	20	20	25	35	40
Adherence strength (N)		1.7	4	8.5	12	20	50	115	200
Thread dimension		M3	M3	M4	M4	M4	M6	M6	M8
Thread length (mm)		5	5	7	7	5	7	9	9
51150...	Ident. No.	**800**	**810**	**820**	**830**	**840**	**850**	**860**	**870**
		●	●	●	●	●	●	●	●

Prod. Gr. 591

ORION® Magnetic grips

Application:
Auxiliary materials with universal application during clamping, assembling, lifting and welding operations, and for installing in devices etc.

Execution:
- Magnet encased in brass
- Fastening option: Press in, shrink or glue in place

Advantage:
- Smooth, with h6 fit tolerance
- **Ident. No. 500–560:** With neodymium core for approx. 5x adhesive force compared to conventional flat grips
- **Ident. No. 700–760:** With samarium cobalt core for approx. 5x adhesive force compared to conventional flat grips

Outer Ø (mm)			6	8	10	13	16	20	25
Height (mm)			20	20	20	20	20	25	35
Adherence strength (N)			7	12	45	70	150	300	500
51149...	Operating temperature up to 100°C	Ident. No.	500 ●	510 ●	520 ●	530 ●	540 ●	550 ●	560 ●
51149...	Operating temperature up to 200°C	Ident. No.	700 ●	710 ●	720 ●	730 ●	740 ●	750 ●	760 ●

Prod. Gr. 591

Telescopic pick-up magnet

Chromium plated with attachment clip

Application:
For lifting and picking up small magnetic objects.

Execution:
- Chrome-plated
- With attachment clip
- Extension length: 145-650 mm

Head Ø (mm)		7
51151...	Ident. No.	020 ●

Prod. Gr. 518

Blind hole magnets

Application:
For cleaning blind holes and tapped drill holes.

Execution:
- With rigid handle
- Chrome-plated head and handle

Ident. No. 510–520

Ident. No. 530–550

Length (mm)		65	90	130	150	180
Head Ø (mm)		1.6	3.0	5.0	8.0	11.0
51152...	Ident. No.	510 ●	520 ●	530 ●	540 ●	550 ●

Prod. Gr. 592

Blind hole magnet set

Application:
For cleaning blind holes and tapped drill holes.

Execution:
- With rigid handle
- Chrome-plated head and handle
- In wooden box
- Supplied lengths: 65/90/130/150/180 mm

51152...	Ident. No.	600 ●

Prod. Gr. 592

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ORION® Magnetic lifter

Application:
For lifting and picking up small magnetic objects.

Execution:
- With flexible shaft
- Chrome-plated
- Plastic handle
- **Ident. No. 500–530:** With fixed neodymium core magnetic head
- **Ident. No. 600–620:** With detachable AlNiCo magnetic head

Ident. No. 500–530

Ident. No. 600

Ident. No. 610

Ident. No. 620

Length (mm)		380	380	420	420	600	600	600
Head Ø (mm)		8	12	14	19	11	20	30
51155...	Ident. No.	500	510	520	530	600	610	620
		●	●	●	●	●	●	●

Prod. Gr. 591

ORION® Hand-held bar magnets
700 mm long

Application:
For effortlessly removing screws, tools and other small parts from gearbox enclosures or other difficult-to-reach areas.

Execution:
- With flexible handle
- With oil-resistant protective sleeve
- Plastic handle

Technical data:
- Length: 700 mm

Head Ø (mm)		11	20	30
51156...	Ident. No.	010	020	040
		●	●	●

Prod. Gr. 591

Magnetic swarf and small parts lifter
Spänemaxx 175, 300 and 600

Application:
use the magnet to attract chips or small pieces, then pull the knob to release the pieces.

Execution:
- easy removal of impurities from machines and coolant
- rustproof rod, plastic handle with protective shield
- magnetic tensile force of 20 kg
- handle diameter of 33 mm
- handle length incl. scraper of 215 mm

Length (mm)		390
Head Ø (mm)		25
51158...	Ident. No.	040
		●

Prod. Gr. 518

ORION® Organising magnets

Application:
For fixing drawings and other paper documents to magnetic surfaces.

Execution:
- Magnetic clamp with coloured plastic cap

Colour	Blue		Yellow		Red		Black		White	
Outer Ø (mm)	51161... Ident. No.		51161... Ident. No.		51161... Ident. No.		51161... Ident. No.		51161... Ident. No.	
20	010	●	020	●	030	●	040	●	050	●
25	060	●	070	●	080	●	090	●	100	●
30	110	●	120	●	130	●	140	●	150	●
34	155	●	160	●	170	●	180	●	190	●

Prod. Gr. 591

ORION® Decorative magnets

Application:
For attaching a variety of objects to magnetic surfaces.

Execution:
- Adhesive magnet with hook
- Painted white

Outer Ø (mm)			20	25	32	40
	Colour					
51161...	White	Ident. No.	200 ●	210 ●	220 ●	230 ●

Prod. Gr. 591

ORION® Wall straps

Application:
Used as a base under magnetic clamps.

Execution:
- White
- Self-adhesive

Width of band (mm)			50	50	35
Length of tape (m)			0.5	1	5
	Colour				
51161...	White	Ident. No.	300 ●	310 ●	320 ●

Prod. Gr. 591

ORION® Magnetic tapes

Application:
For labelling with water-soluble permanent fibre tip pen, applications e.g. shelves, cabinets, organisational boards etc.

Technical data:
- Length of tape: 10 m

Colour	Blue		Yellow		Red		White	
Width of band (mm)	51162... Ident. No.		51162... Ident. No.		51162... Ident. No.		51162... Ident. No.	
20	010	●	020	●	030	●	040	●
30	110	●	120	●	130	●	140	●

Prod. Gr. 591

Pot magnets

Used for installation purposes, with an AlNiCo core

Application:
For labelling with water-soluble permanent fibre tip pen, applications e.g. shelves, cabinets, organisational boards etc.

Execution:
- With AlNiCo core
- Fastening option: Screws
- **No. 51170:** Flat pot magnet with clearance hole
- **No. 51172:** Pot magnet with M6 blind hole thread

No. 51170

No. 51172

	Outer Ø (mm)	Height (mm)	Bore Ø (mm)	Adherence strength (N)		
51170...	19	8	3.5	35	Ident. No.	500 ●
51170...	29	9	4.7	71	Ident. No.	510 ●
51170...	38	11	4.7	140	Ident. No.	520 ●
51172...	17	16		25	Ident. No.	500 ●
51172...	21	19		40	Ident. No.	510 ●
51172...	27	25.4		70	Ident. No.	520 ●
51172...	35	30		190	Ident. No.	530 ●

Prod. Gr. 592

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Oil dispensers

With plastic container

Application:
Ident. No. 030: For drop-by-drop oil delivery at the push of a button.
Ident. No. 040: For localised oil delivery.

Execution:
- Leak-proof sealed cap
- With attachment clip
- Plastic container

Ident. No. 030

Ident. No. 040

Volumetric capacity		5 ml	5 ml
Length (mm)		121	141
Pipe length (mm)		48	50
56007...	Ident. No.	**030**	**040**
		●	●

Prod. Gr. 575

Oil dispensers

With plastic container

Application:
For oiling movable parts.

Execution:
- Transparent
- Indestructible
- **No. 56010:**
  - Small polyethylene oil dispenser
  - Elastic
  - With sealing cap
- **No. 56020:**
  - Oil dispensers for the tool case
  - Polyethylene container
  - With brass pipe and turn-lock

No. 56010 050

No. 56020

Volumetric capacity		60 ml	100 ml	50 ml	100 ml
Length (mm)		120	130	145	155
Pipe length (mm)		60	70	50	60
56010...	Ident. No.	**050**	**075**	-	-
		●	●		
56020...	Ident. No.	-	-	**010**	**015**
				●	●

56010... = Prod. Gr. 5IE
56020... = Prod. Gr. 5IE
56010... = Prod. Gr. 575
56020... = Prod. Gr. 575

PRESSOL Oil dispensers and oil spray cans

Application:
For oiling movable parts.

Execution:
- **No. 56026:**
  - Transparent polyethylene container
  - Adjustable brass pointed pipe
  - Squeeze oiler without pump, with turn-lock fastener
- **No. 56032:**
  - Container produced from slightly transparent polyethylene
  - Single-action brass pump for metered drop discharge
- **No. 56032–56034:**
  - Aluminium spray pipe
  - Virtually complete container drainage
- **No. 56034:**
  - Made from die-cast zinc
  - With double-action brass pump for higher pump capacity
  - Controlled drop delivery

No. 56026

No. 56032

No. 56034

Volumetric capacity		0.25 l	0.5 l	0.2 l	0.3 l	0.5 l
Pipe length (mm)		-	-	135	165	165
56026...	Ident. No.	**025** ●	**050** ●	-	-	-
56032...	Ident. No.	-	-	**020** ●	**030** ●	**050** ●
56034...	Ident. No.	-	-	**020** ●	**030** ●	**050** ●

Prod. Gr. 5IE

reilang Oil dispensers and oil spray cans

Application:
For oiling movable parts.

Execution:
- **Ident. No. 020, 030–050:**
  - Made of breakproof aluminium
  - Double pump unit and pointed pipe made from brass
  - Pivot-mounted suction cylinder ensures container is completely drained
  - Use upside down also possible
- **Ident. No. 025–026:**
  - Transparent polyethylene container
  - Retractable, lockable brass pipe
  - Turn-lock fastener
- **Ident. No. 120–150:**
  - Polyethylene container
  - Single pump unit and pointed pipe made from brass

Ident. No. 020, 030–050

Ident. No. 025–026

Ident. No. 120–150

Volumetric capacity			0.2 l	0.3 l	0.5 l	0.25 l	0.5 l
Pipe length (mm)			132	132	132	140	140
56036...	Aluminium container	Ident. No.	**020** ●	**030** ●	**050** ●	-	-
56036...	Squeezing oiler	Ident. No.	-	-	-	**025** ●	**026** ●
56036...	PE oiler	Ident. No.	**120** ●	**130** ●	**150** ●	-	-

Prod. Gr. 575

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Micro-atomisers

Application:
For finely atomising liquids.

Execution:
- Made of breakproof aluminium

- Nickel-plated pump unit
- Stainless steel ball valves

Advantage:
- Spray angle can be adjusted all the way to spot spray

	Volumetric capacity	Colour		030
56037...	0.3 l	Silver coloured	Ident. No.	●
56037...	0.5 l	Silver coloured	Ident. No.	050 ●

Prod. Gr. 575

ORION® Pistol-type atomiser

Application:
For finely atomising liquids.

Execution:
- Plastic container, white, slightly transparent
- Adjustable nozzle – spray mist or jet
- **No. 56056:** With Viton seal

No. 56058

No. 56056

	Volumetric capacity	Colour		500
56056...	0.6 l	Transparent	Ident. No.	●
56058...	0.5 l	Transparent	Ident. No.	500 ●
56058...	1 l	Transparent	Ident. No.	510 ●

Prod. Gr. 598

PRESSOL Industrial atomiser

Application:
For finely atomising liquids.

Execution:
- Double-action pump unit
- Atomiser head with double stroke; can be positioned as required
- Stable, ergonomically shaped container

- Viton seals (FKM)
- Stainless steel pressure spring and ball

Advantage:
- High spraying volume
- Variable spray nozzle

Ident. No. 010

Ident. No. 020

Ident. No. 030

	Volumetric capacity	Colour		010
56055...	750 ml	Black	Ident. No.	●
56055...	750 ml	Red	Ident. No.	020 ●
56055...	750 ml	Yellow	Ident. No.	030 ●

Prod. Gr. 5IE

Manual sprayer

Application:
Ident. No. 010: For atomising aggressive substances such as solvents, acids, alkalis and various cleaning agents.
Ident. No. 020: For atomising mineral oil-based lubricants, separating agents, formwork oils etc.
Ident. No. 030: For atomising watery substances

Execution:
- With adjustable spray head and fill level scale

Advantage:
- **Ident. No. 010–020:** Spraying in all areas, including above head height, thanks to special 360° suction/spray system

Ident. No. 010

Ident. No. 020

Ident. No. 030

		Volumetric capacity	Colour		
56059...	Super Resistant 360°	0.5 l	White | Transparent	Ident. No.	010 ●
56059...	Solution Classic	0.5 l	White | Transparent	Ident. No.	020 ●
56059...	Basic model	0.5 l	White | Transparent	Ident. No.	030 ●

Prod. Gr. 575

Pressurised spray bottle

Application:
For atomising liquids.

Execution:
- Transparent container with scale and large filler opening
- Suitable for chemicals, solvents, cleaning agents and formwork oils
- Powerful manual air pump for pumping
- Nickel-plated valve rod and control nozzle
- Chemically resistant viton (FKM) seals
- Overpressure valve and safety lock

Advantage:
- No propellants used so pressure is created using environmentally friendly means

Volumetric capacity		1.25 l
56060...	Ident. No.	100 ●

Prod. Gr. 575

Pressure spreader

Application:
For atomising liquids.

Execution:
- Robust polypropylene container that is resistant to acid
- Integrated safety valve
- Viton seal that is resistant to chemicals
- With flexible pump lever
- Adjustable conical nozzle
- Pressurised capacity: 0.5 l

Volumetric capacity		1 l
56060...	Ident. No.	010 ●

Prod. Gr. 569

Industrial atomiser

Application:
For atomising liquids

Execution:
- Plastic container with stainless steel fitting

Advantage:
- Wide opening of the neck enables bottle to be filled using canisters without a funnel

	Volumetric capacity	Colour		
56060...	0.5 l	White	Ident. No.	540 ●
56060...	1 l	White	Ident. No.	550 ●

Prod. Gr. 575

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

SAMOA Hallbauer – industrial pump atomiser

White transparent PE container

Execution:
- 2.5-bar safety pressure relief valve
- strong suction and high yield pump unit
- resistant VITON seals
- suitable media: low-viscosity mineral oils, rust removers, formwork oils, release agents,
- wallpaper stripper, lightly aggressive solvent and cleaning agent

Technical data:
- Working pressure: 2.5 bar

Volumetric capacity		1 l	2 l
56062...	Ident. No.	100 ●	200 ●

Prod. Gr. 575

Ident. No. 100

ORION® High-pressure sprayer

Application:
For atomising liquids.

Execution:
- Plastic container, white, slightly transparent
- Adjustable nozzle – spray mist or jet
- Not suitable for oil and solvents

Advantage:
- With locking lever for continuous spray

Volumetric capacity		2 l
Working pressure (bar)		3
56061...	Ident. No.	520 ●

Prod. Gr. 598

WEICON® Compressed air spray can

Application:
For atomising low-viscosity liquids.

Execution:
- Includes spray set with four different spray heads
- Ball valve with suction manifold
- Can be filled using compressed air directly via tyre inflators or using an adapter via a compressed air supply
- Can be filled with a range of low-viscous media
- Operating pressure: 5–10 bar

Volumetric capacity		0.4 l
56067...	Ident. No.	110 ●

Prod. Gr. 575

Accessories for			56067 110
56067...	Filler manifold	Ident. No.	210 ●
56067...	Spare spray set	Ident. No.	310 ●

feilang Plastic bottles

Application:
For dispensing wood stain, lacquer, diluents and other liquids.

Execution:
- Acid-resistant NE-PE plastic
- **Ident. No. 005–050:** With drop closure for precise dispensing
- **Ident. No. 125–500:** With bent and retractable spray pipe

Volumetric capacity			0.125 l	0.25 l	0.5 l
56068...	With drop closure	Ident. No.	005 ●	025 ●	050 ●
56068...	With spray pipe	Ident. No.	125 ●	250 ●	500 ●

Prod. Gr. 575

Ident. No. 005–050

Ident. No. 125–500

PRESSOL Suction and pressure sprays

With 130-mm suction pipe

Application:
For decanting liquids.

Execution:
- Made from polished brass
- Suction and pressure injector in a single pipe

Advantage:
- PVC double-seal reduces friction and creates an excellent suction/expulsion effect

Technical data:
- Pipe length: 130 mm

Volumetric capacity		0.5 l	1 l
56070...	Ident. No.	110	120
		●	●

Prod. Gr. 5IE

Accessories for			56070 110	56070 120
56070...	Additional pipe	Ident. No.	220 ●	220 ●
56070...	Flexible hose	Ident. No.	350 ●	350 ●

reilang Manual dispensing pump

Application:
For controlled filling and draining of all kinds of liquids.

Execution:
- With transparent hard-PVC cylinder

- Scale in cl
- Smooth-running and good suction capacity
- **Ident. No. 010:** Includes rigid brass pipe and PA tube with metal outlet
- **Ident. No. 020:** Includes PVC hose with metal outlet

Volumetric capacity		0.15 l	1 l
Pipe length (mm)		130	120
Hose length (mm)		300	750
56070...	Ident. No.	010	020
		●	●

Prod. Gr. 575

reilang Vacuum and pressure injectors

Double-action

Application:
Simultaneous suction and filling with each stroke.

Execution:
- Safety handle

- Aluminium casing
- Suitable for oils, coolants, anti-freeze, petroleum and much more
- Includes 2 PVC hoses

Volumetric capacity		0.26 l	0.72 l
Hose length (mm)		600	600
56075...	Ident. No.	100	200
		●	●

Prod. Gr. 575

PRESSOL Vacuum and pressure injector

Double-action

Application:
Simultaneous suction and filling with each stroke.

Execution:
- Aluminium casing

- With maintenance-free piston pump
- For heating oils, mineral, synthetic and biological oils, washing solvent, coolant, anti-freeze, alcohol, petrol, brake fluid and others
- Includes 2 PVC hoses

Volumetric capacity		0.5 l
Hose length (mm)		500
56075...	Ident. No.	050
		●

Prod. Gr. 5IE

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Measuring cups

Execution:
- **Ident. No. 010:**
  - Resistant to oil and acid
  - 10-ml scale graduation
- **Ident. No. 010–015:**
  - Made of polypropylene
  - Transparent
- **Ident. No. 015:**
  - With handle
  - With scale
  - Supplied measuring cup heights: 130, 150, 210 mm
- **Ident. No. 030–050:**
  - PE container, with scale and grip
  - Flexible outlet
- **Ident. No. 110:**
  - Made from tinplate
  - With polyethylene safety outlet

Ident. No. 010

Ident. No. 015

Ident. No. 030–050

Ident. No. 110

Volumetric capacity		1 l	0.5 l | 1 l | 2 l	3 l	5 l	1 l
Height (mm)		170	-	265	300	270
56076...	Ident. No.	010	015	030	050	110
		●	●	●	●	●

Prod. Gr. 5IE

Water canister 10 l

Execution:
- PE canister, with drain valve
- With flexible outlet, can be stacked

Volumetric capacity		10 l
Height (mm)		361
Width (mm)		353
56076...	Ident. No.	200
		●

Prod. Gr. 5IE

Funnels

Execution:
- High lip for spray protection
- Resistant to oil, petrol and acid
- **Ident. No. 010:**
  - With replaceable brass fine screen
  - Flexible, removable metal outlet
  - Capacity: 3200 ml
- **Ident. No. 025:** Flexible outlet

Ident. No. 010

Ident. No. 025

Ø (mm)		200	160
Material		Sheet steel	PE - Polyethylene
56077...	Ident. No.	010	025
		●	●

Prod. Gr. 5IE

PRESSOL Set of funnels

Execution:
- Funnel diameters: 50, 75, 100, 120, 150 mm
- Resistant to oil, petrol and acid

Material		PE - Polyethylene
Number of pieces in assortment/set (PCS)		5
56077...	Ident. No.	110
		●

Prod. Gr. 5IE

Lubricant containers

Application:
For individual lubricant requirements.

Execution:
- **No. 56080:**
  - Made from indestructible plastic
  - With permanent magnet in the base
- **No. 56090:**
  - Made from cellidor
  - Impact-resistant
  - Transparent
  - With retaining handle

No. 56080

No. 56090

	Volumetric capacity	Length x width		
56080...	0.25 l	80 x 80 mm	Ident. No.	010 ●
56090...	0.5 l	125 x 120 mm	Ident. No.	010 ●

Prod. Gr. 575

Lubricating brush

Execution:
- Resistant to oil and coolant
- With sheet metal handle

Technical data:
- Version: Flat

Brush thickness (mm)		9	12	15	18
56092...	Ident. No.	010 ●	020 ●	030 ●	040 ●

Prod. Gr. 575

PRESSOL Multi-purpose tub

Made from shatterproof polyethylene

Application:
For changing oil or for cleaning parts.

Execution:
- Made of break-proof polyethylene
- Black
- With robust handles

Advantage:
- With raised section to position dirty parts
- Lip all the way around tub for safe pouring

Volumetric capacity		6 l
Ø (mm)		390
Height (mm)		120
56095...	Ident. No.	010 ●

Prod. Gr. 5IE

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Washing bowls

Round

Application:
For washing small parts with flammable washing liquids. In the event of the liquid igniting, the lid closes automatically.

Execution:
- Sheet steel bowl
- painted, RAL 3000 red
- With perforated sheet steel insert
- Replaceable fusible alloy safety device

Advantage:
- Fusible alloy safety device for acids and solvents, acetone and similar substances; the lid closes automatically and extinguishes the fire in the event of the liquid igniting

Volumetric capacity		2 l	5 l
Ø (mm)		200	300
Height (mm)		85	125
56100...	Ident. No.	010	020
		●	●

Prod. Gr. 575

Accessories for			56100 010	56100 020
56102...	Fusible alloy safety devices	Ident. No.	010 ●	010 ●

ORION® Push-type grease presses

With follow-up piston

Application:
For greases of medium consistency and high-viscosity oils.

Execution:
- Made from steel, burnished
- **No. 56191:** With pointed nosepiece for flush-type lubrication nipples DIN 3405
- **No. 56192:** With universal adapter for spherical and conical lubricating nipple DIN 71412

Technical data:
- Feed volume per stroke: 0.6 cm^3

Volumetric capacity			60 ml	0.15 l
Length (mm)			115	185
	Mouthpiece outlet			
56191...	Extrusion die	Ident. No.	500 ●	510 ●
56192...	Universal die	Ident. No.	500 ●	510 ●

Prod. Gr. 598

ORION® Oil presses

For all oils

Application:
For all oils.

Execution:
- **Ident. No. 500:** With pointed nosepiece for flush-type lubrication nipples DIN 3405
- **Ident. No. 510:** With universal adapter for spherical and conical lubricating nipple DIN 71412

Volumetric capacity			180 ml
Feed volume per stroke (cm^3)			0.8
Length (mm)			133
	Mouthpiece outlet		
56195...	Extrusion die	Ident. No.	500 ●
56195...	Hollow hydraulic die	Ident. No.	510 ●

Prod. Gr. 598

Push-type press and grease press with screw-in cartridge

Application:
For lubricating.

Execution:
- Includes screw-in cartridge
- Quick and clean to fill using screw-in cartridges

Volumetric capacity			100 ml
Feed volume per stroke (cm^3)			0.5
	Mouthpiece outlet		
56196...	Extrusion die	Ident. No.	010 ●
56196...	Universal die	Ident. No.	020 ●

Prod. Gr. 575

Accessories for			56196 010	56196 020
56196... (pack of 4)	Screw-in cartridges	Ident. No.	100 ●	100 ●

Single-handed grease press with screw-in cartridge

Application:
For lubricating

Execution:
- Single-handed gun complete with nozzle pipe, 4 jaw nosepieces and 2 screw-in cartridges
- Quick and clean to fill using screw-in cartridges

Volumetric capacity		100 ml
Connection thread		M10 x 1
56220...	Ident. No.	200 ●

Prod. Gr. 575

Accessories for		56220 200
56196... Screw-in cartridges (pack of 4)	Ident. No.	100 ●

Single-handed grease gun

Application: For lubricating

Volumetric capacity		0.125 l
Connection thread		M10 x 1
56220...	Ident. No.	020 ●

Prod. Gr. 5IE

High pressure hand-operated lever-type grease gun

Application:
For lubricating with grease, filling with grease gun filler no. 56259 or with grease cartridge no. 56235 100.

Execution:
- **Ident. No. 005:**
  - Made of steel
  - Painted black
- **Ident. No. 010:**
  - Robust all-steel design, painted silver
  - Short stroke system, infinitely variable piston rod fixing
  - Filling/draining value, ergonomic handle
  - For 400 g cartridges or 500 g loose grease

Ident. No. 005

Ident. No. 010

Volumetric capacity			400 ml	400 ml
Max. working pressure (bar)			400	400
Connection thread			M10 x 1	M10 x 1
Feed volume per stroke (cm^3)			1.2	2.0
PRESSOL	56235...	Ident. No.	005 ●	-
MATO	56235...	Ident. No.	-	010 ●

PRESSOL = Prod. Gr. 5IE
MATO = Prod. Gr. 5JM

Accessories for			56235 005	56235 010
56235... Grease cartridge, 400 g		Ident. No.	100 ●	100 ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

High-pressure hand lever grease press

As a set

Application:
For lubricating

Execution:
- Industry design with grease press 56235 010
- In plastic case with oil-resistant inlay
- Contents: Lever-type grease gun, nozzle tube with hydraulic nosepiece, quick-change nozzle tube with sliding coupling, quick-change nozzle tube with articulated nosepiece, quick-change hose, pointed nosepiece, hollow nosepiece

Delivery:
Lever-type grease gun, nozzle tube with hydraulic nosepiece, quick-change nozzle tube with sliding coupling, quick-change nozzle tube with articulated nosepiece, quick-change hose, pointed nosepiece, hollow nosepiece

Volumetric capacity		400 ml
Max. working pressure (bar)		400
Connection thread		M10 x 1
56235...	Ident. No.	400 ●

Prod. Gr. 5JM

Accessories for		56235 400
56235... Grease cartridge, 400 g	Ident. No.	100 ●

High pressure hand-operated lever-type grease gun

Application:
For lubricating

Execution:
- With galvanised grease container
- With ergonomically shaped handle
- TÜV institute, German Agricultural Society (DLG), BLT tested

Advantage:
- Simple, quick and completely clean loading and removal of grease cartridge, without opening the gun
- 100% environmentally friendly thanks to optimum cartridge draining

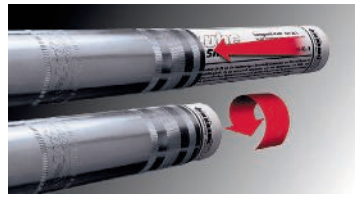

Volumetric capacity		400 ml
Working pressure (bar)		400
Max. working pressure (bar)		800
Connection thread		M10 x 1
56235...	Ident. No.	020 ●

Prod. Gr. 5JM

Accessories for		56235 020
56235... Grease cartridge Multi Plus EP2M	Ident. No.	120 ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

PRESSOL PRELIxx Pro high-pressure grease press and ZHFP two-handed grease press

Execution:
- With 300-mm reinforced hose and hydraulic adapter
- **Ident. No. 010:**
  - Grease supply can be adjusted from 0.1-1.6 cm^3 per stroke
  - With filling nipple and vent valve
  - Ergonomic pump handle, non-slip. T-handle, grip and pressure-optimised
  - Zinc die-cast head, rolled thread on the grease gun pipe, damage-proof.
- **Ident. No. 100:**
  - Ergonomic, non-slip handles
  - Quicker and cleaner to change cartridges; environmentally friendly, as the cartridges are completely drained
  - Simple, wear-proof design with vacuum principle

Technical data:
- Connection thread: M10 x 1

Ident. No. 010

Ident. No. 100

Volumetric capacity		400 ml	500 ml
Working pressure (bar)		900	400
Max. working pressure (bar)		600	850
Feed volume per stroke (cm^3)		1.6	2.1
56236...	Ident. No.	**010**	**100**
		●	●

Prod. Gr. 5IE

Accessories for			56236 010	56236 100
56235...	Grease cartridge, 400 g	Ident. No.	**100** ●	-
56236...	Screw-in cartridge, 500 g	Ident. No.	-	**500** ●

Nozzle pipes and high-pressure hose lines

For high-pressure hand lever grease presses

Execution:
- **Ident. No. 200:**
  - Curved nozzle pipe, with hollow nosepiece
  - With hollow nosepiece
- **Ident. No. 210:** Curved nozzle pipe, with pointed nosepiece
- **Ident. No. 220:** Curved nozzle pipe, with hydraulic gripper nosepiece
- **Ident. No. 230–240:** High-pressure hose line with hydraulic gripper nosepiece
- **Ident. No. 250–260:** high-pressure hose line with thrust coupling; M 1 for flat grease nipple, 16 mm
- **Ident. No. 270–280:** high-pressure hose line with thrust coupling; M 22 for flat grease nipple, 22 mm
- **Ident. No. 290–300:** high-pressure hose line with thrust coupling; M 4 for flat grease nipple, 10 mm

Advantage:
- **Ident. No. 230–300:** Fail-safe, high-pressure reinforced rubber hose 13 mm in diameter, excellent occupational safety due to 1650-bar bursting pressure

Technical data:
- Connection thread: M10 x 1

Ident. No. 200

Ident. No. 210

Ident. No. 220

Ident. No. 230–240

Ident. No. 270–280

Mouthpiece outlet		Hollow die	Extrusion die	Hydraulic gripping die	Hydraulic gripping die	Hydraulic gripping die	Slide coupling M1	Slide coupling M1	Slide coupling M22	Slide coupling M22	Slide coupling M4	Slide coupling M4
Length (mm)		150	150	150	300	500	-	-	-	-	-	-
Hose length (mm)		-	-	-	-	-	300	500	300	500	300	500
56235...	Ident. No.	**200**	**210**	**220**	**230**	**240**	**250**	**260**	**270**	**280**	**290**	**300**
		●	●	●	●	●	●	●	●	●	●	●

Prod. Gr. 5JM

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Grease press accessory set

in a metal case

Application:
For all common lubricating nipples, for accessing difficult-to-reach lubrication areas.

Connection thread		M10 x 1
Composition of set		2 hydraulic nosepieces for H, 1 hollow nosepiece for K, 1 pointed nosepiece for D, 1 16-mm slide coupling for M1, 1 300-mm reinforced hose, 3 150-mm curved nozzle pipes, 1 150-mm straight nozzle pipe, 1 90° bracket for hydraulic nosepiece, extension, quick-action coupling suitable for all hydraulic nosepieces, 3 H 1 lubricating nipples: M6 x 1, M8 x 1, M10 x 1, G 1/8, H 2: M6 x 1, M8 x 1, 1 thread adapter from G 1/8 to M10 x 1 female thread, in metal case
56240...	Ident. No.	**005**
		●

Prod. Gr. 5IE

AccuGreaser – 18-volt cordless grease gun

optional uptake of 400 g pull-off cartridges or LubeShuttle cartridges

Application:
Ident. No. 550: as spare battery for AccuGreaser no. 56235 500

Execution:
- **Ident. No. 550:**
- li-ion battery 18 V
- ref. no. 550: 1500 mAh – sufficient for processing 5-6 grease cartridges
- ref. no. 560: 4000 mAh – sufficient for processing 10–11 grease cartridges

Ident. No. 500

Nominal voltage (V/DC)			-	18
Volumetric capacity			500 ml	-
Max. working pressure (bar)			400	-
Connection thread			MT G 1/8 inch	-
Rechargeable battery/battery capacity (mAh)			1500	1500
56235...	cordless grease gun	Ident. No.	**500**	-
			●	
56235...	spare battery	Ident. No.	-	**550**
				●

Prod. Gr. 5JM

SAMOA Hallbauer compressed air grease guns

Application:
Ident. No. 010: For simple lubrication, using 400-g grease cartridges or loose grease.
Ident. No. 020: For simple lubrication, can be filled with loose grease.

Execution:
- Single-handed operation
- Pressure ratio 1:60
- Max. operating pressure: 420 bar
- Input pressure: min. 2 to max. 7 bar
- Recommended air pressure: 6 bar
- Nozzle pipe or high-pressure hose connection: M10x1
- **Ident. No. 010:** With hydraulic nosepiece
- **Ident. No. 020:** With 300-mm high-pressure hose and hydraulic nose piece

Advantage:
- With 150-mm nozzle tube, even hard-to-reach lubrication areas are easy to access

Ident. No. 010

Ident. No. 020

Volumetric capacity			500 ml	1 l
Connection thread			MT G 1/8 inch	MT G 1/8 inch
Feed volume per stroke (cm^3)			1	1
56266...		Ident. No.	**010**	**020**
			●	●

Prod. Gr. 575

SAMOA Hallbauer grease gun filler

Application:
For filling hand-operated lever-type grease guns

Execution:
- Filled via filling nipple on hand-operated, lever-type guns
- Takes approx. 10 strokes to fill the gun
- Easy to attach to standard grease buckets
- Ref. no. 015 - for plastic 15/18-kg conical grease drums

Technical data:
- Feed volume per stroke: 50 cm^3

Suitable for container contents (l)		5	20	25	50
Max. height (mm)		430	530	530	700
Min./max. inner Ø		180-210 mm	270-310 mm	310-335 mm	335-385 mm
56259...	Ident. No.	**005**	**020**	**025**	**050**
		●	●	●	●

Prod. Gr. 575

SAMOA Hallbauer crank pump

Application:
For pumping diesel, heating oil, hydraulic and engine oils

Execution:
- Suitable for 60 and 200-l metal barrels
- 3-part metal suction tube with foot valve
- Adjustable G2-inch tap adapter
- 1 m transparent NW 25 plastic hose with elbow outlet

Advantage:
- Robust. Powerful, self-priming and perfectly sealed

Feed volume per stroke (l)		0.4
Suitable for container		60-200 litres
56305...	Ident. No.	**010**
		●

Prod. Gr. 575

Hand lever plastic drum pump

Application:
Ident. No. 010: For pumping heating oil, emulsions, water, diesel, petroleum, hydraulic oil
Ident. No. 020: For pumping chemicals, cleaning agents, weak alkalis and acids

Execution:
- Adjustable suction pipe
- **Ident. No. 010:** Polypropylene (PP) body and seal
- **Ident. No. 020:** PP/PE body, viton seals

Advantage:
- Extremely light and flexible

Ident. No. 010

Ident. No. 020

Model		Drum pump PP	Drum pump PP/PE
Min./max. immersion depth		400-900 mm	400-900 mm
Feed quantity (l/min)		16	16
Suitable for container		60-200 litres	60-200 litres
56317...	Ident. No.	**010**	**020**
		●	●

Prod. Gr. 575

Lever-operated cylinder-type drum pump

Application:
For pumping petroleum, diesel, heating oil, engine oil, machine oil, cutting oil, Multitin, anti-freeze. NOT suitable for petrol

Execution:
- With galvanised telescopic tube G1/2-inch
- Barrel screw connection G 2" a and M 64x4 a
- 1-m outlet hose with hose clamps, steel outlet manifold and anti-kink spring

Advantage:
- Suction pipe can be adjusted to set the immersion depth

Min./max. immersion depth		480-930 mm
Feed quantity (l/min)		35
Suitable for container		60-210 litres
56318...	Ident. No.	**500**
		●

Prod. Gr. 575

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

HORN TECALEMIT Drum pump
manually operated

Application:
For pumping low-viscose mineral oils, as well as petrol.

Execution:
- For upright drums

Model		K 10 C
Min./max. immersion depth		0-840 mm
Feed volume per stroke (l)		0.25
Suitable for container		200 litres
56320...	Ident. No.	010
		●

Prod. Gr. 575

Accessories for			56320 010
56321...	Hose sets	Ident. No.	010 ●

HORN TECALEMIT Drum pump
Voltage 230 V, 50/60 Hz, shockproof, suppressed

Application:
For pumping heating and diesel oils of hazard class A III from all standard containers. Fast and simple filling of heating oil into transport containers and refuelling of all kinds of diesel vehicles.

Execution:
- 230-V voltage, 50/60 Hz, shockproof, noise-suppressed
- Suction hose with filter
- Pump housing and nozzle valve made from high-quality, impact-resistant plastic
- **Ident. No. 120:**
  - Motor pump
  - Pressure hose with anti-kink spring
  - With nozzle valve, dispensing pump for supply of small volumes
- **Ident. No. 140:**
  - Self-priming hybrid pump
  - Delivery hose with automatic nozzle valve and hose swivel joint
  - 4-m connection cable with plug

Advantage:
- **Ident. No. 120:** Emergency manual mode in the event of power failures

Ident. No. 120

Ident. No. 140

Model		HORNET W 40	HORNET W 85
Max. immersion depth (mm)		1600	1600
Feed quantity (l/min)		40	85
Suitable for container		60-200 litres	60-200 litres
56345...	Ident. No.	120	140
		●	●

Prod. Gr. 575

FLUX Pump sets

Application:
Ident. No. 490: For pumping acids and alkalis.
Ident. No. 510: For pumping mineral products.
Ident. No. 530: For pumping flammable liquids.

Execution:
- Collector motor, 230 V, 50 Hz, 500 W, shockproof, noise-suppressed
- Motor with undervoltage trip and continuous speed adjustment
- **Ident. No. 490:**
  - Set comes complete with PP pump pipe set with FKM seal
  - 2-m PVC hose DN 19
  - With PP hose connection and nozzle
- **Ident. No. 490–510:** PP drum screw coupling, conductive
- **Ident. No. 510:**
  - Set comes complete with aluminium pump pipe set with NBR seal
  - 2-m mineral oil hose DN 25
  - 2 hose clips
  - Aluminium nozzle
- **Ident. No. 530:**
  - Set comes complete with stainless steel pump pipe set with no seals
  - 2-m universal hose line DN 21
  - Brass hose connections and pump nozzle

Advantage:
- **Ident. No. 530:** Explosion-protected, built and approved in accordance with ATEX directive 94/9/EC category 2

Model		F430 PP-40/33	F430 AL-41/38	F424 S-43/38
Max. immersion depth (mm)		1000	1000	1000
Max. delivery height (m)		9.5	9.5	9.5
Feed quantity (l/min)		165	215	200
Suitable for container		60-200 litres	60-200 litres	60-200 litres
Max. temperature resistance (°C)		50	80	100
56359...	Ident. No.	490	510	530
		●	●	○

Prod. Gr. 575

URACA Test pumps

Application:
For hydrostatic testing of parts such as fittings, pipes, pipelines, tanks, gas bottles, test stands and many other high-pressure components.

Execution:
- Test media: clear water, water/oil emulsion, hydraulic oil or low viscosity oil
- **Ident. No. 003:**
  - With drain valve, manometer and stainless steel container
  - With 2-m pressure hose DN 10
- **Ident. No. 005–210:** With drain valve, pressure gauge and hot-dip galvanised container

Advantage:
- **Ident. No. 010–210:** 2-stage pumps with large piston for rapid filling of the system being tested and small piston for building the test pressure

Ident. No. 003

Ident. No. 005

Ident. No. 010–110

Ident. No. 210

Model		UX 60	HP 300	HP 500	HP 500	HP 32-8
Container capacity (l)		10	30	30	60	60
Min./max. pressure		0-60 bar	0-60 bar	2-200 bar	2-200 bar	2-1000 bar
Version		Stationary	Stationary	Stationary	Mobile	Mobile
Connection thread		G 1/2 inch	G 1/2 inch	G 3/8 inch	G 3/8 inch	G 3/8 inch
Form		Rectangular	Oval	Oval	Rectangular	Rectangular
Feed volume per stroke (cm^3)		11	28	79	79	32
Length x width x height		500 x 180 x 160 mm	430 x 310 x 330 mm	430 x 310 x 330 mm	480 x 330 x 490 mm	480 x 330 x 490 mm
Material		Stainless steel	Sheet steel	Sheet steel	Sheet steel	Sheet steel
Weight (kg)		6.5	14	18	31	38
56377...	Ident. No.	**003**	**005**	**010**	**110**	**210**
		(○)*	(○)*	(○)*	(○)*	(○)*

Prod. Gr. 575

Accessories for		56377 005	56377 010	56377 110	56377 210
56380... Test pump pressure hose	Ident. No.	**010** ○	**020** ○	**020** ○	**020** ○

ORION® Easy-opener and multi-opener

Application:
the ideal tool for gently opening sensitive components

Execution:
- **Ident. No. 100:**
  - delicate, slim design – flexible and strong at the same time
  - three lever surfaces with different material thicknesses
  - ideal for loosening e.g. switches, lights or similar elements
- **Ident. No. 110:**
  - slim design – flexible and strong at the same time, made of glass-fibre reinforced polyamide
  - conductive ESD material protects against electrostatic discharge
  - does not scratch delicate surfaces
  - steel insert on the handle side e.g. for prying open paint cans

Ident. No. 100

Ident. No. 110

Length (mm)				178	180
	Width (mm)	Material of the grip handle			
56549...	32	Polyamide	Ident. No.	**100** ●	-
56549...	32	Plastic glass fibre reinforced	Ident. No.	-	**110** ●

Prod. Gr. 598

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Spatula

With wooden handle

Application:
For applying, spreading and smoothing materials such as putty, and for removing planar materials.

Execution:
- With wooden handle

	Width (mm)	Material	Material of the grip handle		
56550...	30	Steel	Wood	Ident. No.	030 ●
56550...	40	Steel	Wood	Ident. No.	040 ●
56550...	50	Steel	Wood	Ident. No.	050 ●
56550...	60	Steel	Wood	Ident. No.	060 ●
56550...	70	Steel	Wood	Ident. No.	070 ●
56550...	80	Steel	Wood	Ident. No.	080 ●
56550...	100	Steel	Wood	Ident. No.	100 ●

Prod. Gr. 566

Joint puller in set

Application:
For pulling and smoothing permanently elastic joint compounds

Execution:
- 17 different options
- 4 differently shaped pullers with radius details



56551...	Ident. No.	400 ●	

Prod. Gr. 580

Spatulas and trowels

Application:
For applying, spreading and smoothing materials such as putty, and for removing planar materials.

Ident. No. 200

Ident. No. 300

Ident. No. 310

Ident. No. 320

Ident. No. 330

		Width (mm)	Material	Material of the grip handle		
56550...	Japanese spatula (4x)		Steel, stainless	1-component plastic	Ident. No.	200 ●
56550...	Brick trowel with swan neck	160	Steel, stainless	Wood	Ident. No.	300 ●
56550...	Plasterer's spatula	60	Steel, stainless	Wood	Ident. No.	310 ●
56550...	Smoothing trowel		Steel, stainless	Wood	Ident. No.	320 ●
56550...	Swiss plastering trowel	120	Steel, stainless	Wood	Ident. No.	330 ●

Prod. Gr. 566

Elastic plaster beakers

Ø x height	Material	56560... Ident. No.
125 x 89 mm	Rubber	010 ●

Prod. Gr. 566

Brushes

Execution:
- **No. 56570:**
  - Non-sparking, plastic ferrule
  - Very full design, wooden handle
- **No. 56570 025–56570 040, 56576 125–56576 160:** Ensures pure, light china bristles
- **No. 56573:**
  - In tinplate ferrule
  - Pure, light china bristles
  - Ground wooden handle
- **No. 56576:**
  - Curved, with long wooden handle
  - Tinplate ferrule.
- **No. 56576 025–56576 060:** Ensures pure, grey china bristles

No. 56570

No. 56573

No. 56576 025–56576 060

No. 56576 125–56576 160

Brush thickness (mm)			20	25	30	35	40	50	60
56573...	Flat brush	Ident. No.	020 ●	025 ●	-	035 ●	-	050 ●	060 ●
56570...	Industrial round brush	Ident. No.	-	025 ●	030 ●	-	040 ●	-	-
56576...	Radiator paint brush, dark bristles	Ident. No.	-	025 ●	-	035 ●	-	050 ●	060 ●
56576...	radiator paint brush with light-coloured bristles	Ident. No.	-	125 ●	-	135 ●	-	-	160 ●

Prod. Gr. 566

Brush set

Execution:
- 1 flat brush each of size 20, 25, 35, 50 mm
- 1 round brush each of size 2, 4, 6
- 1 enamel brush each of size 10, 12, 16

Number of pieces in assortment/set (PCS)		10
56580...	Ident. No.	005 ●

Prod. Gr. 566

Paint rollers

Application:
Ident. No. 010: For 1-C paints and primers
Ident. No. 020, 040–070: For universal use
Ident. No. 030: For 2-C paints

Execution:
- **Ident. No. 020:** Pile height: 13 mm
- **Ident. No. 030:** Pile height: 15 mm
- **Ident. No. 040–050:** Woven plush cover

Ident. No. 020

Width (mm)			100	100	100	200	270	180	250
Ø (mm)			40	30	30	80	80	80	80
Material			Foam material	PA - Polyamide	Nylon (polyamide)	Polyamide cotton	Polyamide cotton	PA - Polyamide	PA - Polyamide
Bore Ø (mm)			6	6	6	8	8	8	8
56581...	Radiator roller	Ident. No.	010 ●	020 ●	030 ●	-	-	-	-
56581...	Paint roller	Ident. No.	-	-	-	040 ●	050 ●	060 ●	070 ●

Prod. Gr. 566

Accessories for			56581 010	56581 020	56581 030	56581 040	56581 050	56581 060	56581 070
56581...	Push-fit roller frame	Ident. No.	100 ●	100 ●	100 ●	105 ●	110 ●	105 ●	110 ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Paint baths

Plastic

Technical data:
- Material: Plastic

Width (mm)		200	260	330
56581...	Ident. No.	300	310	320
		●	●	●

Prod. Gr. 566

Flat masking tape

Suitable for temperatures up to 60°C

Execution:
- Lightly creped
- Particularly tear-proof and elastic
- Excellent adhesive force

Technical data:
- Length of tape: 50 m
- Max. temperature resistance: 60 °C

Width of band (mm)		19	38	50
56582...	Ident. No.	010	020	030
		●	●	●

Prod. Gr. 566

3M 101E crepe adhesive tape

The basic professional product for secure indoor masking and fixing

Application:
Ideal for painting jobs with minimal requirements and low thermal loads, for basic masking and protection indoors, for bundling, packing and marking, and for securing light loads.

Execution:
- Good adhesion on many surfaces
- Controlled dispensing
- Good curve-negotiating properties
- Soft to the touch and can be torn by hand

Technical data:
- Thickness: 0.125 mm
- Colour: Beige
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: Impregnated fine crepe paper
- Max. short-term temperature resistance: 60 °C
- Breaking elongation: 9 %

Width of tape x length of strap		18 mm x 50 m	30 mm x 50 m	48 mm x 50 m
56582...	Ident. No.	300	310	320
		●	●	●

Prod. Gr. 6RM

3M 301E crepe adhesive tape

The industrial professional product for indoor masking and painting jobs up to 100°C

Application:
For painting jobs and infrared/UV drying, and for bundling, packing, marking and fixing.

Execution:
- Soft to the touch and can be torn by hand
- Resistant to solvents and moisture
- Good paint adhesion

Advantage:
- Clean paint edges
- No bleed-through of paint
- Can be removed without residue

Width of tape x length of strap		18 mm x 50 m	36 mm x 50 m	48 mm x 50 m
Thickness (mm)		0.15	0.15	0.15
Colour		Beige	Beige	Beige
Type of adhesive		Rubber/resin	Rubber/resin	Rubber/resin
Adhesive tape backing material		Impregnated fine crepe paper	Impregnated fine crepe paper	Impregnated fine crepe paper
Max. short-term temperature resistance (°C)		100	100	100
Breaking elongation (%)		10	10	10
56582...	Ident. No.	400	410	420
		●	●	●

Prod. Gr. 6RM

3M Super gold painter's masking tape 244

Ideal for professional painting jobs indoors and outdoors

Application:
For painting jobs and other applications requiring UV resistance and residue-free removal with an optimum drying temperature of 100°C for 30 minutes

Execution:
- Extra-thin, specially impregnated paper tape that is smooth and soft to the touch
- Resistant to solvents and water
- Good paint adhesion

Advantage:
- For razor-sharp paint edges
- No bleed-through of paints or varnishes
- No running of paint

Technical data:
- Thickness: 0.08 mm
- Colour: Gold
- Type of adhesive: Acrylate
- Adhesive tape backing material: Impregnated paper
- Max. short-term temperature resistance: 150 °C
- Breaking elongation: 6 %

Width of tape x length of strap		18 mm x 50 m	30 mm x 50 m	48 mm x 50 m
56582...	Ident. No.	500	510	520
		●	●	●

Prod. Gr. 6RM

Paint grid

Ident. No. 220–240

Ident. No. 200–210

Length x width		300 x 200 mm	300 x 260 mm	170 x 100 mm	260 x 220 mm	270 x 270 mm
Material		Metal	Metal	Plastic	Plastic	Plastic
56581...	Ident. No.	200	210	220	230	240
		●	●	●	●	●

Prod. Gr. 566

Construction plans and painter plans

made of LDPE

Execution:
- **Ident. No. 200:**
  - particularly resilient, made from high-quality LDPE
  - thickness approx. 75 my
- **Ident. No. 300–320:**
  - very tear-proof and elastic
  - made from high-quality LDPE, thickness approx. 30 my

Technical data:
- Material: LDPE - Low density polyethylene

Ident. No. 200

Ident. No. 300–320

Length x width		5 x 4 m	12.5 x 4 m	50 x 2 m
56583...	Ident. No.	300	310	320
		●	●	●

Prod. Gr. 566

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

GEDORE Tyre levers

Profiled shape

Execution:
- With protective surfaces for aluminium rims

Technical data:
- Surface: Chrome-plated
- Material: Chrome-vanadium steel

Length (mm)		200	305	400	500	610
52199...	Ident. No.	020	030	040	050	060
		●	●	●	●	●

Prod. Gr. 530

Crate openers (pry bars)

Application:
For removing nails, for prizing open crates and much more.

Execution:
- Made of steel
- Forged blade and nail claw
- Varnished
- Hexagon

Length (mm)		400	600	800
Ø (mm)		18	18	20
56610...	Ident. No.	015	020	030
		●	●	●

Prod. Gr. 576

GEDORE Crate openers (pry bars)

Application:
For removing nails, for prizing open crates and much more.

Execution:
- Made from chrome-molybdenum-vanadium steel
- With hollow claw and tongue
- Varnished
- Octagonal

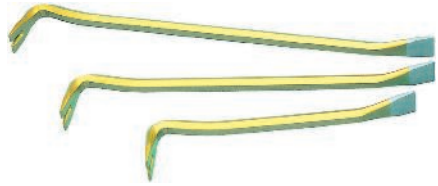

Length (mm)		350	600	800
Ø (mm)		18	18	18
56611...	Ident. No.	010	020	030
		●	●	●

Prod. Gr. 558

GEDORE Crowbars

Execution:
- Made of steel
- Painted black

- **Ident. No. 020:** With pointed tip and flat, curved cutter
- **Ident. No. 040:** With pointed tip and claw

Length (mm)			1500
Ø (mm)			30
Weight (kg)			8
56612...	With pointed tip and flat, curved cutter	Ident. No.	020
			●
56612...	With pointed tip and claw	Ident. No.	040
			●

Prod. Gr. 558

GEDORE Universal prying tool

Execution:
- Made of steel
- One side with polished surface and bent 45°
- Other side tapered to a point
- Octagonal

Length (mm)	Ø (mm)	56615... Ident. No.
400	16	010 ●

Prod. Gr. 558

GEDORE Lever bar set
Three-piece

Application:
For lifting and moving.

Execution:
- Silver chromated
- With ergonomic handles
- Lever bar lengths: 300, 400 and 600 mm

Material of the grip handle	Plastic
56616... Ident. No.	010 ●

Prod. Gr. 558

ORION® Set of prying tools
4-piece

Application:
For all kinds of leverage tasks.

Execution:
- Angled blades
- Lever bar lengths: 200, 300, 450, 600 mm

Advantage:
- Non-slip plastic grip fits perfectly in your hand
- With impact-resistant grip – indestructible and robust in application

Material of the grip handle	Plastic
55617... Ident. No.	010 ●

Prod. Gr. 598

Offset pins (flange mounting tool)

Application:
For coaxial alignment of flanges and other parts.

Execution:
- specialist tool steel, round, red powder-coated
- 90° angle, curved
- tempered working points

Technical data:
- Shaft diameter: 20 mm
- Tip diameter: 7 mm
- Limb length: 150 mm
- Length: 500 mm

56618... Ident. No.	020 ●

Prod. Gr. 576

BAHCO Adjustable lever bar

Execution:
- The position of the lever can be adjusted using a button in the handle rod
- The lever can be adjusted to one of 14 positions
- Forged, high-strength design

Technical data:
- Material: Hardened steel

Length (mm)	250	300	380
56650... Ident. No.	300 ●	310 ●	320 ●

Prod. Gr. 519

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Scaffolding ratchet
with mounting mandrel

Execution:
- Double hex with Dynamic Drive profile for optimum hold
- 2 spanner widths: 19 and 22 mm
- 28 teeth with reversing ring for easy change of direction
- 13° rear swivel angle for working in confined areas
- Conical mounting handle for aligning holes on the parts to be fastened

Technical data:
- Length: 300 mm
- Material: Hardened steel

56650...	Ident. No.	200 ●

Prod. Gr. 519

Manual stapler

Application:
For stapling on edges, corners and grooves.

Execution:
- For type A staples, 6-14 mm arm length
- Staple slot at the front

Advantage:
- For precise working; impact force can be controlled using the setting lever
- Repeat impact function for staples not driven in all the way

Suitable for clamp type		A
56630...	Ident. No.	300 ●

Prod. Gr. 576

Hand-held stapler

Application:
Professional quality – for regular stapling tasks.

Execution:
- For type G staples, 6-14 mm arm length

- Robust aluminium housing
- Height/depth adjustment
- Smooth pressure lever with pinch guard
- Easy-to-use staple compartment

Suitable for clamp type		G
56630...	Ident. No.	400 ●

Prod. Gr. 576

Electric stapler

Application:
For continuous stapling tasks.

Execution:
- For type G staples, 6-14 mm arm length
- With depth stop

- Flush nose for use in corners and along edges
- Cable length: 2.4 m

Advantage:
- Ergonomic housing for fatigue-free working

Suitable for clamp type		G
56630...	Ident. No.	402 ●

Prod. Gr. 576

Hammer stapler

Execution:
- For type G staples, 6-10 mm arm length
- Robust steel housing, optimum impact weight

Advantage:
- Ergonomic handle for fatigue-free work

Suitable for clamp type		G
Staple length		10 mm
56630...	Ident. No.	404 ●

Prod. Gr. 576

STANLEY Staples

Type A and type G

Application:
Ident. No. 306–314: For filling hand-held stapler no. 56630 300
Ident. No. 406–414: For filling hand-held stapler no. 56630 400, electric stapler no. 56630 402 and hammer stapler no. 56630 404.505.

Delivery:
Pack of 1000

Ident. No. 306–314

Ident. No. 406–414

Limb length (mm)				6	8	10	12	14
	Clip type	Form						
56630...	A	Round	Ident. No.	306 ●	308 ●	310 ●	312 ●	314 ●
56630...	G	Flat	Ident. No.	406 ●	408 ●	410 ●	412 ●	414 ●

Prod. Gr. 576

ORION® Spark plug brushes

Material of the wire		Brass	Brass
Number of rows (PCS)		3	4
Length (mm)		150	200
Length of bristles (mm)		15	18
Wire Ø (mm)		0.15	0.15
56710...	Ident. No.	500 ●	510 ●

Prod. Gr. 598

ORION® File brush

File brush band, bonded

Execution:
- File brush band, stuck on
- Brush strip size: 115 x 40 mm

Length (mm)		250
56720...	Ident. No.	500 ●

Prod. Gr. 598

ORION® Wire hand brushes

Steel, stainless steel and brass wire

Application:
For cleaning cast iron pieces, files and for brushing a wide array of parts and surfaces.

Technical data:
- Length of bristles: 25 mm
- Wire diameter: 0.3 mm
- Length: 290 mm

Number of rows (PCS)			1	2	3	4	5	6
Width (mm)			15	22	30	35	40	45
	Material of the wire							
56725...	Steel	Ident. No.	510 ●	520 ●	530 ●	540 ●	550 ●	560 ●
56726...	Stainless steel	Ident. No.	510 ●	520 ●	530 ●	540 ●	550 ●	560 ●
56727...	Brass	Ident. No.	-	520 ●	530 ●	540 ●	550 ●	-

Prod. Gr. 598

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ORION® Fillet weld brush

Application:
For cleaning fillet welds after welding processes.

Technical data:
- Number of rows: 3 PCS
- Length: 290 mm
- Length of bristles: 35 mm
- Width: 35 mm

Material of the wire		Steel	Stainless steel
56730...	Ident. No.	510	520
		●	●

Prod. Gr. 598

LESSMANN® Hand brush with scraper

Application:
For brushing and scraping heavy soiling.

Execution:
- Beech body with screwed-on scraper unit

Number of rows (PCS)			4
Length of bristles (mm)			25
Wire Ø (mm)			0.3
Width (mm)			35
Length (mm)			290
	Material of the wire		
56730...	Steel	Ident. No.	530 ●

Prod. Gr. 598

ORION® Cleaning brushes

Application:
For cleaning uneven surfaces.

Technical data:
- Length: 225 mm

Ident. No. 500

Ident. No. 510

Material of the bristles		Nylon	Horsehair
Number of rows (PCS)		4	3
56735...	Ident. No.	510 ●	500 ●

Prod. Gr. 598

LESSMANN® Hand brush for the food industry

Application:
For cleaning implements in the food industry and the catering trade.

Execution:
- With plastic handle
- Complies with the European Brushware Federation hygiene charter

Technical data:
- Length of bristles: 20 mm

Number of rows (PCS)			4	4	3
Wire Ø (mm)			0.15	0.3	0.35
Width (mm)			20	20	25
Length (mm)			225	225	285
	Material of the wire				
56735...	Stainless steel	Ident. No.	600 ●	-	620 ●
56735...	Nylon	Ident. No.	-	610 ●	-

Prod. Gr. 598

ORION® Universal hand brushes

Application:
For cleaning cast iron pieces, files and for brushing a wide array of parts and surfaces.

Execution:
- With ergonomic plastic handle

Technical data:
- Number of rows: 1 PCS
- Length of bristles: 28 mm
- Wire diameter: 0.3 mm
- Width: 15 mm
- Length: 260 mm

	Material of the wire		
56740...	Steel	Ident. No.	500 ●
56740...	Stainless steel	Ident. No.	510 ●

Prod. Gr. 598

LESSMANN® ROKI professional hand brushes

Application:
Extremely tough brush for cleaning weld seams and for removing brake dust on brake callipers.

Advantage:
- With ergonomic two-component handle

Technical data:
- Number of rows: 2 PCS
- Length of bristles: 22 mm
- Width: 10 mm
- Length: 225 mm

Wire Ø (mm)			0.35	0.25
	Material of the wire			
56740...	Steel	Ident. No.	600 ●	-
56740...	Stainless steel	Ident. No.	610 ●	-
56740...	Brass	Ident. No.	-	620 ●

Prod. Gr. 598

LESSMANN® Cylindrical hand brushes

Application:
For deburring and cleaning bores and pipes.

Execution:
- With eyelet
- For manual use
- **Ident. No. 010–060:** Edging: Corrugated steel
- **Ident. No. 100–150:** Edging: Corrugated brass
- **Ident. No. 200–250:** Edging: Smooth nylon

Technical data:
- Filling length: 100 mm
- Length: 300 mm

Material of the wire	Steel	Steel	Steel	Steel	Steel	Steel	Brass	Brass
Ø (mm)	4	6	8	10	15	20	4	6
Wire Ø (mm)	0.1	0.1	0.1	0.15	0.15	0.15	0.10	0.10
56741... Ident. No.	010 ●	020 ●	030 ●	040 ●	050 ●	060 ●	100 ●	110 ●

Material of the wire	Brass	Brass	Brass	Brass	Nylon	Nylon	Nylon	Nylon
Ø (mm)	8	10	15	20	4	6	8	10
Wire Ø (mm)	0.12	0.15	0.15	0.15	0.20	0.20	0.20	0.25
56741... Ident. No.	120 ●	130 ●	140 ●	150 ●	200 ●	210 ●	220 ●	230 ●

Material of the wire	Nylon	Nylon
Ø (mm)	15	20
Wire Ø (mm)	0.30	0.30
56741... Ident. No.	240 ●	250 ●

Prod. Gr. 598

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ORION® Dustpans

Execution:
- **Ident. No. 500:**
  - With wooden handle
  - No lip
  - Painted black
  - Dustpan size: 220 x 200 mm
- **Ident. No. 510:**
  - Metal dustpan and handle
  - With rubber lip

Ident. No. 500

Ident. No. 510

Material		Sheet steel	Sheet steel
Material of the grip handle		Wood	Metal
56750...	Ident. No.	500	510
		●	●

Prod. Gr. 598

ORION® Wooden hand brush

Ident. No. 610

Ident. No. 620

Material of the bristles		Coconut	Coconut	Horsehair	Horsehair	Arenga
Length (mm)		280	430	280	430	430
56737...	Ident. No.	520	620	510	610	630
		●	●	●	●	●

Prod. Gr. 598

ORION® Factory and workshop broom

Application:
Ident. No. 010–020, 050–060: For dry floors
Ident. No. 030–040: For concrete, industrial and wooden floors
Ident. No. 070–080: For rough indoor and outdoor floors

Execution:
- **Ident. No. 030–040:** Resistant to oil and alkalis
- **Ident. No. 070–080:** Wet- and oil-resistant fibres

Delivery:
With handle holder, without handle; please order separately

Ident. No. 010–020

Ident. No. 030–040

Ident. No. 050–060

Ident. No. 070

Width (mm)			400	600
	Material of the bristles			
56760...	Coconut	Ident. No.	010 ●	020 ●
56760...	Elaston	Ident. No.	030 ●	040 ●
56760...	Artificial fibre bristle	Ident. No.	050 ●	060 ●
56760...	Arenga	Ident. No.	070 ●	080 ●

Prod. Gr. 598

Accessories for			56760 010	56760 020	56760 030	56760 040	56760 050	56760 060	56760 070
56760... handle	1400-mm broom	Ident. No.	110 ●	-	110 ●	-	110 ●	-	110 ●
56760... handle	1500-mm broom	Ident. No.	-	120 ●	-	120 ●	-	120 ●	-

Accessories for			56760 080
56760... handle	1400-mm broom	Ident. No.	-
56760... handle	1500-mm broom	Ident. No.	120 ●

Squeegee

Application:
For pushing liquids together

Execution:
- Metal body with robust handle holder
- With double foam/rubber lip

Delivery:
With handle holder, without handle; please order separately

Technical data:
- Material: Metal

Width (mm)		450	600
56761...	Ident. No.	010 ●	020 ●

Prod. Gr. 566

Accessories for			56761 010	56761 020
56760... handle	1400-mm broom	Ident. No.	110 ●	110 ●

Rice straw broom

With handle

Execution:
- With handle

Width (mm)			300
Length (mm)			1500
	Material of the bristles		
56761...	Rice straw	Ident. No.	030 ●

Prod. Gr. 566

Tool and device holder

rust-proof

Application:
Space-saving storage and organisation

Execution:
- Brackets provide secure hold
- Simple wall mounting

- Five plastic-coated brackets, can be moved along the bar

Technical data:
- Width: 30 mm
- Length: 500 mm

56762...	Ident. No.	010 ●

Prod. Gr. 504

Steel shovels

Execution:
- Without handle

Technical data:
- Width: 250 mm
- Material: Steel

Ident. No. 040

Ident. No. 050

Blade shape		Pointed shape (Frankfurt shape)	Flat shape (Holstein shape)
56761...	Ident. No.	040 ●	050 ●

Prod. Gr. 566

Accessories for			56761 040	56761 050
56761... mm	Shovel handle 1300	Ident. No.	060 ●	060 ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

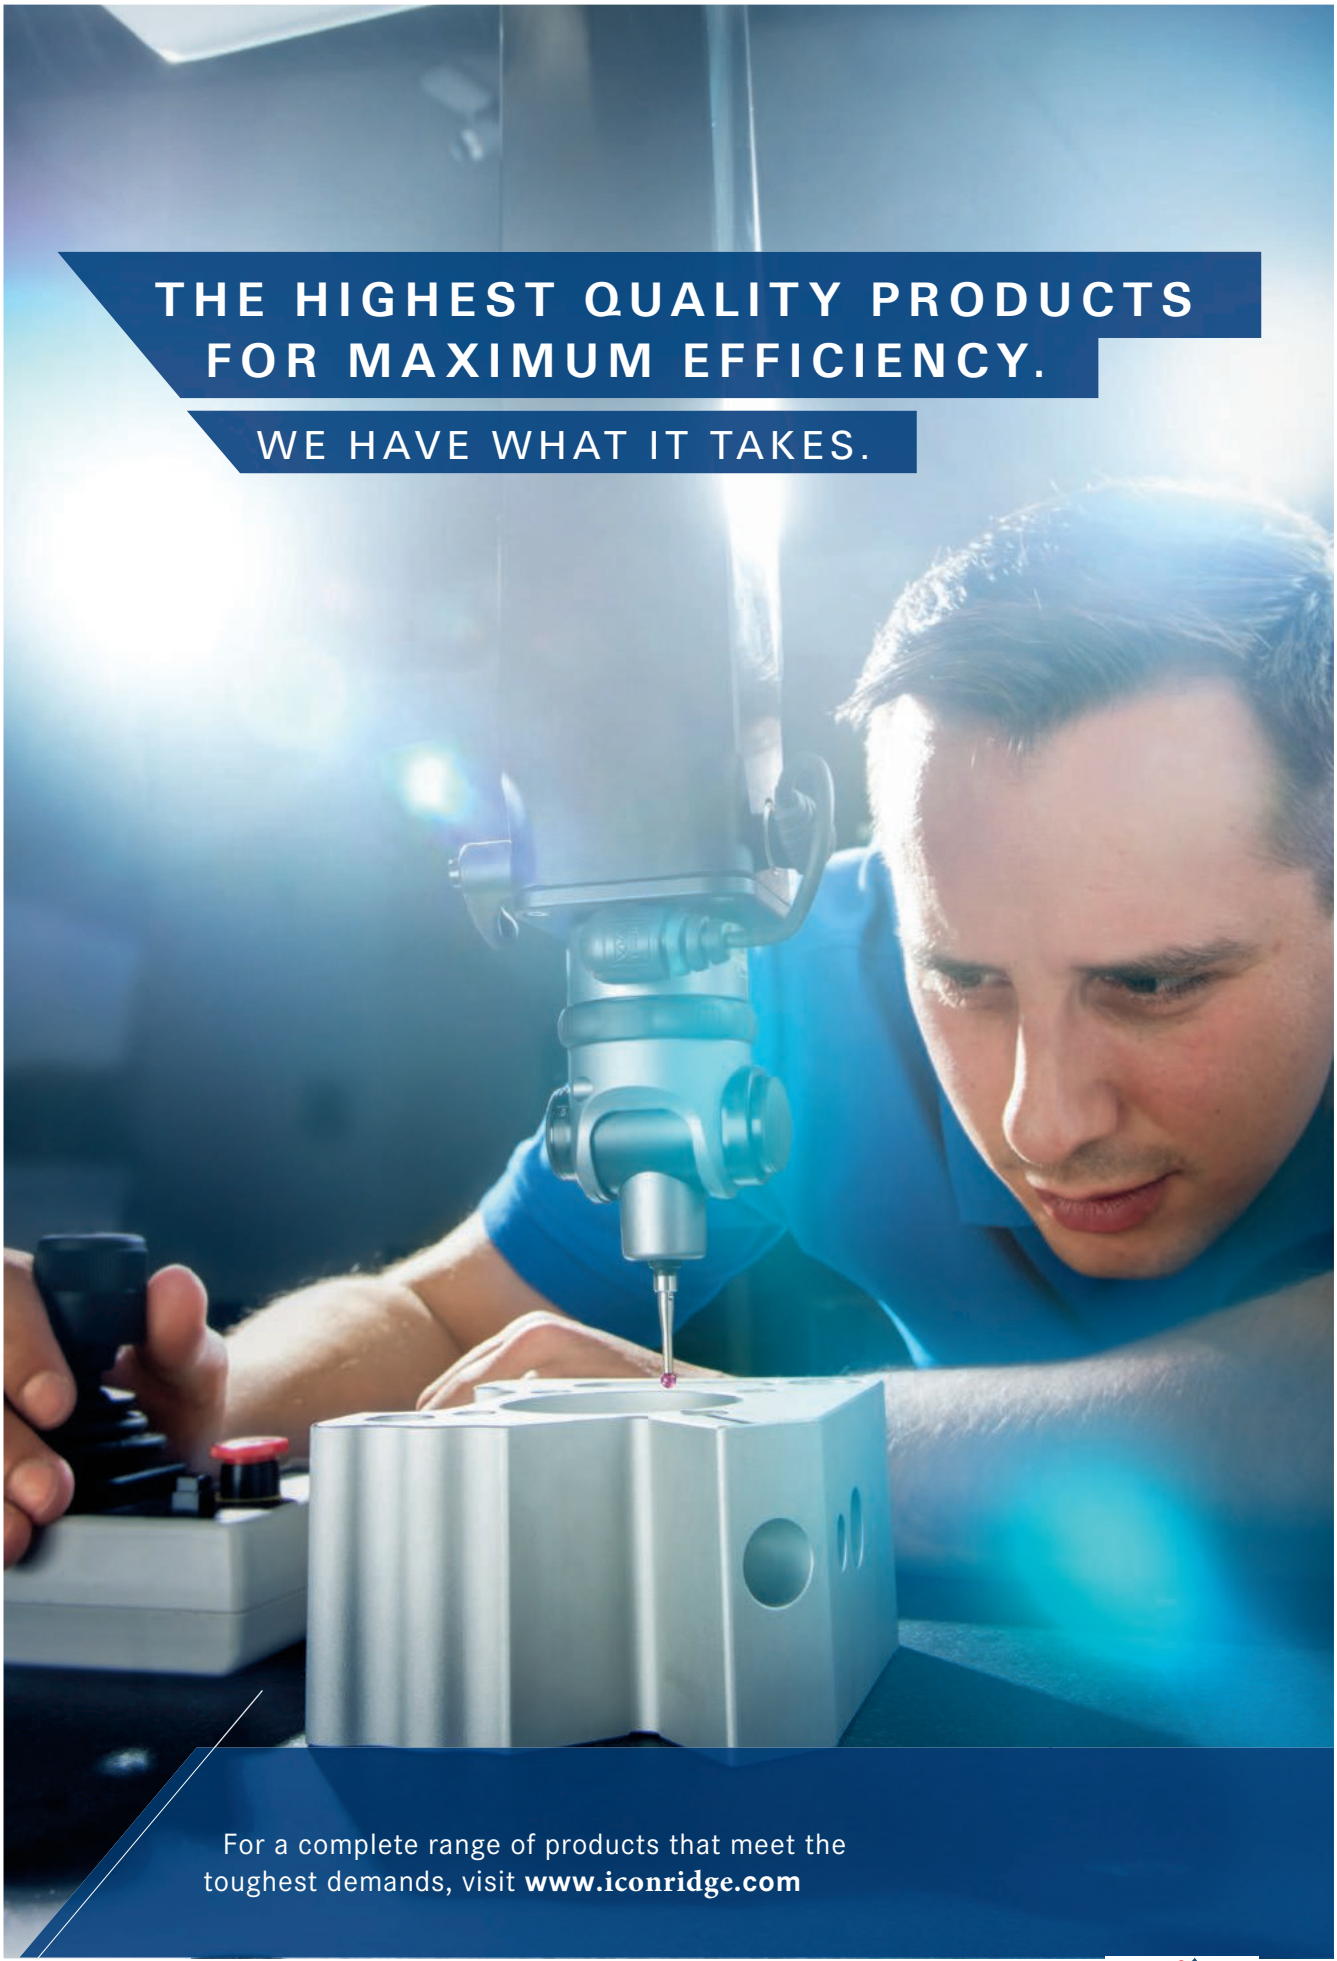

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Swarf hooks

Application:
For safely removing chips from processing machines.

Execution:
- **Ident. No. 010–020:** Hands protected with flat steel plate
- **Ident. No. 450–600:** With deep plastic hand guard for increased safety

Technical data:
- Blade diameter: 8 mm

Ident. No. 010–020

Ident. No. 450–600

Blade length (mm)		300	500	350	500
Material of the grip handle		1-component plastic	1-component plastic	Wood	Wood
56780...	Ident. No.	010	020	450	600
		●	●	●	●

Prod. Gr. 565

Marker and position lights

With LED pilot lamp (emergency power lights)

Application:
Can also be used as an emergency lamp.

Execution:
- Powerful, re-chargeable
- Protected against overload and deep discharge
- Lamp head can be rotated vertically through 120°
- Protection class IP 54
- With orange front shield
- 230-V and 12/24-V charging cables
- **Ident. No. 040:** With halogen main lamp
- **Ident. No. 060:** With 3-W power LED main lamp; no need to change lamps

Advantage:
- Extra level of safety with emergency power function
- Separate charging unit means the lamp is light in weight

Delivery:
With wall holder, battery and charger

Technical data:
- IP protection class: IP 54

Ident. No. 040

Ident. No. 060

Model		SL 5 set	SL 5 LED set
Length (mm)		336	245
Length x width x height		336 x 126 x 112 mm	245 x 120 x 104 mm
56800...	Ident. No.	040	060
		●	●

Prod. Gr. 576

Accessories for			56800 040
56800...	Spare bulbs	Ident. No.	140 ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ATORN® LED professional workshop lamp
battery operated

Execution:
- robust, splash-proof housing with rubberised gripping surface
- 2 folding hooks that can be rotated by 360°
- 2 holding magnets on the back, 1 magnet on the bottom
- switch functions: 1. front auxiliary light, 2. 100% main light, 3. 50% main light, 4. off
- lamp base can be rotated by 180° and locked in eight positions
- with battery status and remaining charge indicator
- 3.7-V/2600-mAh Li-ion battery, charged via a 5-V Micro USB socket
- effective lighting duration of 6 hours, charging time of 4 hours

Length (mm)		266
Luminous flux (lm)		440
Length x width x height		266 x 48 x 32 mm
IP protection class		IP 54
56829...	Ident. No.	**025** ●

Prod. Gr. 597

ATORN® LED professional folding lamp
battery operated

Execution:
- robust, splash-proof plastic housing with rubberised gripping surface
- belt clip on the bottom with retractable hook that can be rotated by 360°
- holding magnet on the bottom
- switch functions: 1. 100% main light, 2. 50% main light, 3. off
- flexible joint can be rotated by 340° and locked in 12 positions
- with battery status indicator
- 3.7-V/1550-mAh Li-ion battery, charged via a 5-V Micro USB socket
- effective lighting duration of 10 hours, charging time 4.5 hours

Technical data:
- Length: 131 mm
- Luminous flux: 220 lm
- Length x width x height: 131 x 66 x 28 mm
- IP protection class: IP 54

56829...	Ident. No.	**035** ●

Prod. Gr. 597

Hand-held work lamp
Fluorescent tube

Application:
For individual lighting of dark areas in varied operations.

Execution:
- Impact-resistant polycarbonate protective tube
- Prismatic diffuser
- Rubber handle and cap
- Rotating suspension hook

Length (mm)		400
Power rating (W)		11
Nominal voltage (V/AC)		230
IP protection class		IP 54
Cable length (m)		5
56830...	Ident. No.	**001** ●

Prod. Gr. 5IC

Hand-held battery-powered work lamps

With LED

Application:
For individual lighting of dark areas in varied operations.

Execution:
- COB LED rechargeable battery light. 3 W COB LED and 7 white LEDs in lamp head (pocket torch function)
- 2x 360° rotating suspension hooks, bending housing
- Soft-grip housing made from impact-resistant plastic
- 2 magnets on the back, one in the lamp base
- 200 lumen light output. 3 light modes
- Li-ion battery 3.7V/2100 mAh. 4 m lighting range, 300 g weight

Delivery:
With 230 V mains charging adapter, 12 V DC adapter

Technical data:
- Length: 280
- IP protection class: IP 44

56830...	Ident. No.	061
		●

Prod. Gr. 5IC

SCANGRIP LIGHTING LED work lamps

Application:
For individual lighting of dark areas for mobile tasks.

Execution:
- Powerful and uniform lighting thanks to COB-LED light strip
- Brightness can be set in two levels
- Li-ion battery
- **Ident. No. 015:**
  - Lamp head can be swivelled 180°
  - Fastening using rotating hook or magnet
- **Ident. No. 017:**
  - lamp head can be swivelled 180°
  - fastening using rotating hook or magnet

Technical data:
- Nominal voltage: 3.7 V/DC
- IP protection class: IP 20

Ident. No. 015

Ident. No. 017

Model		MINIFORM	MIDIFORM
Length (mm)		115	157
Luminous flux (lm)		110	150
56831...	Ident. No.	015	017
		●	●

Prod. Gr. 5IC

Waldmann Compact hand-held lamps

Voltage 230 V, 50 Hz, shock-proof with high-impact proof plastic conduit

Application:
For individual lighting of dark areas in varied operations.

Execution:
- Insulated and with highly impact-resistant plastic protective tube
- Ballast in the power plug
- Integrated reflector prevents irritating direct glare

Technical data:
- Nominal voltage: 230 V/AC
- IP protection class: IP 20
- Cable length: 5 m

Length (mm)		205	274
Power rating (W)		9	11
56835...	Ident. No.	020	030
		●	●

Prod. Gr. 4AB

Accessories for			56835 020	56835 030
56835...	Fluorescent bulb	Ident. No.	120	131
			●	●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ATORN® LED machine and workstation lamp

Voltage 230 V/AC/50 Hz

Execution:
- Voltage 230 V, 50 Hz
- Lamp head and base made from impact-resistant, non-flammable plastic
- Anodised aluminium star-shaped heat dissipator and lens holder
- Switch integrated in the lamp head
- colour temperature 4000 K
- Enormous light output and long LED service life
- 1.6-m connection cable

Advantage:
- Infinitely adjustable focus for spot or wide beam

Delivery:
With extra-strong magnetic clamp and screw clamp with star-shaped grip

Power rating (W)		3
Arm length (mm)		590
IP protection class		IP 40
56870...	Ident. No.	**010** ●

Prod. Gr. 597

Machine lamps

Voltage 230 V, 50 Hz, noise-suppressed, for workstations and machines

Application:
For workstations and machines.

Execution:
- Voltage 230 V, 50 Hz, noise suppressed
- With E27 holder for impact-resistant bulbs up to 100 W, ECO halogen A lights up to 70 W or 15-W energy-saving lights
- Colour: aluminium silver, similar to RAL 9006

Delivery:
With 1.5-m cable and Schuko plug, screw-on flange, excluding bulb

Power rating (W)		70
Arm length (mm)		900
IP protection class		IP 20
56871...	Ident. No.	**505** ●

Prod. Gr. 5ID

Accessories for			56871 505
56871...	Wall bracket	Ident. No.	**615** ●
56871...	Screw clamp for side fixing	Ident. No.	**625** ●

LED universal lamps and machine lamps

Execution:
- Uses little energy
- Long service life
- Low heat generation
- **Ident. No. 700:**
  - 3 x 2 W lamp
  - Flexible metal hose arm
  - 360 lumen light output
- **Ident. No. 710, 730:** Articulated arm with large throat depth
- **Ident. No. 710–720:** Transformer integrated in the lamp head
- **Ident. No. 730:**
  - cable length: 1.5 m
  - Transformer integrated in the socket

Advantage:
- **Ident. No. 710–730:** Lubricants and coolants do not burn into the protective glass

Ident. No. 700

Ident. No. 710

Ident. No. 720

Ident. No. 730

Power rating (W)			6	12	12
Arm length (mm)			520	800	30
IP protection class			IP 20	IP 65	IP 65
56871...	100-277 V/50-60 Hz	Ident. No.	**700** ●	-	-
56871...	24 V AC/DC	Ident. No.	-	**710** ●	**720** ●
56871...	120-277 V/50-60 Hz	Ident. No.	-	**730** ●	-

Prod. Gr. 5ID

Accessories for			56871 700	56871 710	56871 720	56871 730
56871...	Screw clamp for side fixing	Ident. No.	**701** ●	**625** ●	**625** ●	**731** ●
56871...	Magnetic base	Ident. No.	**702** ●	-	-	-
56871...	Wall bracket	Ident. No.	-	**615** ●	**615** ●	**732** ●

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Halogen workstation lamps

with flexible lamp arm, 230 V 50 Hz

Execution:
- Switch integrated in the lamp head
- Lamp head and housing made from impact-resistant, non-flammable plastic
- **No. 56879 100–56879 110:** Connection line 1.6 m H03VVH2-F, 230 V
- **No. 56879 100–56879 110, 56880 010:**
  - Multi-purpose low voltage lamp with flexible lamp arm
  - Powerful luminosity and glare-free light for precise work
  - Safety transformer integrated in the base of the lamp
  - Base height 88 mm, lamp-head length 83.5 mm
  - Halogen lamp 12 V/20 Watt/G4 base
- **No. 56879 120:**
  - Powerful luminosity and large light field
  - Flexible gooseneck tube made of metal, with rubber coating
  - Ballast unit integrated in the base of the lamp
  - Base height 111 mm, lamp-head length 288 mm
  - Compact 11-W fluorescent tubes/G23 base
- **No. 56879 120–56880 010:** Connection line 1.6 m H03RN-F, 230 V
- **No. 56880:** Including safety glass cover and reinforced connecting cable

Delivery:
With connection cable, magnet, screw clamps, screws

No. 56879 100–56879 110, 56880 010

No. 56879 120

Power rating (W)			20	11
Arm length (mm)			420	700
IP protection class			IP 20	IP 40
56879...	Halogen broad beam lamp	Ident. No.	**100** ●	-
56879...	Halogen spot beam lamp	Ident. No.	**110** ●	-
56879...	Cold light	Ident. No.	-	**120** ●
56880...	Halogen	Ident. No.	**010** ●	-

Prod. Gr. 5ID

Accessories for			56879 100	56879 110	56879 120	56880 010
56879...	Halogen bulb	Ident. No.	**105** ●	**115** ●	-	**105** ●
56879...	Safety glass cover	Ident. No.	**200** ●	-	-	-
56879...	Cold light lamp	Ident. No.	-	-	**125** ●	-

LED workstation lamps

with flexible lamp arm, 230 V 50 Hz

Execution:
- With high-performance LED module, vibration and shake-proof

Delivery:
Includes universal screw-on flange 60 x 60 mm and connection cable

Technical data:
- Power rating: 4 W
- Arm length: 780 mm
- IP protection class: IP 54

56879...	LED broad beam lamp	Ident. No.	**130** ●

Prod. Gr. 5ID

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Bauer & Böcker LED workstation lamps, “Spotlight” and “Flexi” models

with flexible lamp arm, 230 V 50 Hz

Execution:
- LED module up to 700 lumen, glare- and flicker-free, colour temperature: daylight white, approx. 5500 Kelvin
- Flicker-free and low reflection, 120-degree uniform illumination, with wall power supply unit. 24 V supply.
- Rubber-coated 66-mm magnetic base with adhesive force of 180 N
- Cover made of acrylic, total length 600 mm, lamp head 65 mm
- Chip life min. 50,000 hours.
- Ref. no. 140: No dimmer
- Ref. no. 142: With dimmer (continuously variable)

Technical data:
- Power rating: 4.5 W
- Arm length: 500 mm
- IP protection class: IP 65
- Dimmable: No

56879...	LED broad beam lamp	Ident. No.	**140** ●

Prod. Gr. 5ID

Bauer & Böcker LED workstation lamps, “Highlight” and “Floodlight” models

with flexible lamp arm, 230 V 50 Hz

Execution:
- High-performance chip with lamp life of min. 50,000 operating hours
- **Ident. No. 150:**
  - LED module with very low power consumption
  - Streamlined shape, for universal use
  - Protected against splash water and dust, with power supply unit
  - Glare- and flicker-free light, low-reflection, 160-degree uniform illumination
  - 400-lumen light output, colour temperature: daylight white, approx. 5500 Kelvin
  - Rubber-coated 66-mm magnetic base with adhesive force of 180 N
  - Lamp head 90 x 30 x 13 mm, total length 620 mm
  - Ref. no. 150: No dimmer
  - Ref. no. 152: With dimmer (continuously variable)
- **Ident. No. 160:**
  - LED light, with flexible light arm, rubber-coated
  - Low power consumption and low heat generation
  - Solid and robust design for heavy-duty use
  - Glare and flicker-free light, low reflection, with 24 V power supply
  - Luminous flux: 1200 lumen, colour temperature: daylight white, approx. 5500 Kelvin, 160 degree uniform illumination
  - 88-mm magnetic base with 420 N adhesive force
  - Total length 850 mm, light head 175 x 50 x 25 mm
  - Ref. no. 160: No dimmer
  - Ref. no. 162: With dimmer (continuously variable)

Technical data:
- IP protection class: IP 65
- Dimmable: No

Ident. No. 150

Ident. No. 160

Power rating (W)			2.5	10
Arm length (mm)			550	700
56879...	Highlight model	Ident. No.	**150** ●	-
56879...	Floodlight model	Ident. No.	-	**160** ●

Prod. Gr. 5ID

ATORN® High-performance LED hand lamps

batteries or rechargeable batteries

Execution:
- **Ident. No. 005:** Rubberised push-button switch at the lamp end
- **Ident. No. 005–007:**
  - Light beam can be focused with infinite adjustment by moving the lamp head
  - Sturdy aluminium lamp, steel retaining clip
- **Ident. No. 007:**
  - Push button at the lamp end, with simultaneous strong magnetic function
  - 3 switchable light modes
  - The micro-USB charging input is protected by a sliding cover
  - Small LED at the side to indicate the charging status
- **Ident. No. 010:**
  - high-performance Cree LED 5 W
  - Light beam can be focused using one hand
  - Waterproof and dust-proof, protection class IP 66
  - 4 light levels

Delivery:
Ident. No. 005: Including 2 x AAA batteries
Ident. No. 007: Includes battery and USB charging cable
Ident. No. 010: Lamp, 230-V charger, 12/24-V adapter, fabric belt pouch, operating instructions

Ident. No. 005

Ident. No. 007

Ident. No. 010

Length (mm)			140	126	157
Luminous flux (lm)			100	110	230
Lighting range (m)			30	80	150
Material			Aluminium	Aluminium	Aluminium
Colour			Black | Blue	Black | Blue	Blue
Type of rechargeable battery/battery			Alkali	Li-Ion	Li-Ion
Number of rechargeable batteries/batteries			2	-	-
Rechargeable battery/battery designation			1.5 V Micro AAA	-	-
56801...		Ident. No.	**005** ●	**007** ●	**010** ●

Prod. Gr. 597

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Battery-powered lamps

Made from plastic or aluminium

Execution:

- **Ident. No. 005:**
  - With 4 LEDs and 4 lenses to focus light
  - Intense light spot
  - Lighting range: 50 m
  - Operating time: 12 hours
  - Integrated battery, direct charging
- **Ident. No. 020:**
  - Powerful halogen long-range beam
  - With adhesive magnet and carry strap
  - Lighting range: 1000 m
  - Operating time: 90 min
  - Battery in charger unit, direct charging
- **Ident. No. 025:**
  - Extreme light output from 200 Lumen High-Power Cree LED
  - With adhesive magnet and carry strap
  - Bright-white light
  - Operating time: approx. 180 min
  - NiMH 4.8-V battery contained in charger unit, direct charging
- **Ident. No. 030:**
  - With light focusing through one lens
  - Lightweight and shockproof
  - High degree of light efficiency with low energy consumption
  - Operating time: 35 hours
  - Integrated battery, direct charging
- **Ident. No. 040:**
  - With light focusing
  - Super light and for versatile applications
  - Integrated battery, direct charging at socket
- **Ident. No. 060:**
  - Can be charged directly at any 12-24-V car power supply
  - Over-charging protection
  - Operating time: 60 min

Ident. No. 005

Ident. No. 020

Ident. No. 025

Ident. No. 030

Ident. No. 040

Ident. No. 060

Model		Multi LED	PowerLuxHal-ogen	PowerLux LED	LED 2000	Joker LED	AutoLux LED
Length (mm)		135	175	175	97	100	60
Material		Plastic	Plastic	Plastic	Plastic	Plastic	Plastic
Colour		Black	Black	Black	Black	Black	Black
Type of rechargeable battery/battery		NiMH	NiMH	NiMH	NiMH	NiMH	NiMH
56806...	Ident. No.	**005**	**020**	**025**	**030**	**040**	**060**
		●	●	●	●	●	●

Prod. Gr. 576

Accessories for			56806 020
56806...	Bulb	Ident. No.	**120** ●

LED hand-held lamps

Execution:

- Heat-resistant nylon lamp (up to 210°C)
- Hard rubber head
- Extremely robust, protected against splash water
- With 0.5-W LED and 3 white LEDs
- Lighting range: 30 m

Delivery:
Includes carry strap, excludes batteries

Model		Turbo 1+3
Length (mm)		150
Material		Plastic
Colour		Black
Type of rechargeable battery/battery		AlMn
Number of rechargeable batteries/ batteries		3
Rechargeable battery/battery designation		Micro AAA
56804...	Ident. No.	**110** ●

Prod. Gr. 576

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ATORN® Head lights

batteries or rechargeable batteries

Execution:

- **Ident. No. 300:**
  - Rubberised push switch at the lamp head
  - 2 switchable light modes, battery compartment in the lamp head
  - Textile headband and additional interchangeable rubber headband for the helmet insert
  - Housing made of robust ABS plastic
- **Ident. No. 310:**
  - Robust aluminium housing, push switch on the lamp head
  - 4 light modes (high, medium, low, strobe)
  - Battery on the back of the head placed in a robust ABS housing with additional red signal lamp
  - Textile headband, adjustable for optimum comfort
  - With battery status display via LEDs and overload protection
  - 3.7 V rechargeable battery with 2600 Ah

Delivery:
Ident. No. 300: Incl. 3 x AAA batteries and 2 head bands
Ident. No. 310: incl. USB charging cable

Ident. No. 300

Ident. No. 310

Luminous flux (lm)		100	350
Lighting range (m)		50	80
Type of rechargeable battery/battery		Alkali	Li-Ion
Number of rechargeable batteries/batteries		3	-
Rechargeable battery/ battery designation		1.5 V Micro AAA	-
56808...	Ident. No.	**300**	**310**
		●	●

Prod. Gr. 597

ATORN® LED inspection lamps

batteries or rechargeable batteries

Execution:

- **Ident. No. 205:**
  - Light chip with 120 lumen light output
  - Lateral holding magnet, rubberised push switch
  - Rotatable push-on clip
- **Ident. No. 215:**
  - Light chip with 150 lumens light output, additional LED at the head end
  - Retaining magnet on a rotatable retaining clip at the side
  - Rechargeable 3.7 V Li.Ion battery with USB contact
  - Charge level display

Delivery:
Ident. No. 205: Incl. Including 3 x AAA batteries
Ident. No. 215: incl. battery and USB charging cable

Ident. No. 205

Ident. No. 215

Light source		LED	LED
Length (mm)		160	185
Luminous flux (lm)		120	150
Number of rechargeable batteries/batteries		3	1
Rechargeable battery/ battery designation		1.5 V Micro AAA	3.7 V lithium ion battery
56808...	Ident. No.	**205**	**215**
		●	●

Prod. Gr. 597

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

LED Penlight X 15
with attachment clip

Execution:
- Robust metal housing
- Large end cap switch for optimum handling even with gloves
- Brightness up to 15 lumens
- Up to 45 hours of light

Delivery:
Including 2 x AAA batteries

Technical data:
- Length: 134 mm
- Colour: Silver

56808...	Ident. No.	125
		●

Prod. Gr. 576

Safety lamps

Execution:
- Explosion-protected cordless torch
- 100% waterproof, dust-proof and air-tight
- Rubberised light head
- Rubberised rear switch for one-handed operation
- **Ident. No. 420:** Tested and certified according to the latest standards (ATEX Zone 1)
- **Ident. No. 420, 440–450:** White LED
- **Ident. No. 420–425:**
  - Robust PC housing (not conductive) with fastening clip
  - Handy ATEX-certified, pen-size safety lamp
- **Ident. No. 425:**
  - White, highly luminous LED
  - Tested and certified according to the latest standards (ATEX Zone 2)
- **Ident. No. 440:**
  - Robust PC housing (not conductive)
  - Tested and certified according to the latest standards (ATEX Zone 1 and DustEx Zone 21)
- **Ident. No. 440–450:** Fixture to fasten to a helmet
- **Ident. No. 450:**
  - Housing made from highly resistive, conductive XAG plastic, ESD approval
  - Tested and certified according to the latest standards (ATEX Zone 0 and DustEx Zone 21)

Delivery:
With batteries

Technical data:
- Type of rechargeable battery/battery: AlMn

Ident. No. 420

Ident. No. 425

Ident. No. 440

Ident. No. 450

Model	PX2 LED	PX3 LED	PX1 LED	PX1 LED/ESD
Length (mm)	143	154	167	167
Luminous flux (lm)	30	60	120	120
Lighting range (m)	35	100	150	150
Colour	Neon yellow	Neon yellow	Neon yellow	Red
Number of rechargeable batteries/batteries	2	2	4	4
Rechargeable battery/ battery designation	Micro AAA	Mignon AA	Mignon AA	Mignon AA
56809... Ident. No.	420	425	440	450
	●	●	●	●

Prod. Gr. 5IB

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Underwater Kinetics Safety lamps

Execution:
- Robust ABS housing (not conductive, resistant to corrosion)
- ATEX approval for Zone 1
- **Ident. No. 700:**
  - Extremely light and powerful thanks to innovative LED
  - With practical clip holder and rubberised rear push switch
  - Durable, lightweight, ergonomic, 100% waterproof and dustproof
- **Ident. No. 720:**
  - Powerful 3 W LED, light beam adjustable from far to close setting
  - Rubberised “On/Off/Flashing” front switch on the side, also easy to operate wearing gloves
  - Can also be switched on/off using rotary button
  - 100% waterproof and dust-proof

Delivery:
With batteries

Technical data:
- Colour: Neon yellow
- Type of rechargeable battery/battery: AlMn

Ident. No. 700

Ident. No. 720

Model		UK 2 AAA eLED	UK 4 AA eLED
Length (mm)		132	170
Luminous flux (lm)		35	77
Lighting range (m)		64	100
Number of rechargeable batteries/batteries		2	4
Rechargeable battery/ battery designation		Micro AAA	Mignon AA
56809...	Ident. No.	**700**	**720**
		●	●

Prod. Gr. 576

LEDLENSER LED high-performance penlights

With attachment clip

Execution:
- **Ident. No. 010:**
  - Compact torch with classic focusing
  - Excellent luminescence
  - Weighs just 38 g
- **Ident. No. 010, 020:** With attachment clip
- **Ident. No. 015:**
  - Optimised performance – with very high light output
  - Light beam can be adjusted via the Advanced Focus System
  - Economical and ecological – rechargeable
  - With energy status display
- **Ident. No. 020:**
  - Mini torch for professionals
  - Light beam can be focused by turning the lamp head
- **Ident. No. 023:**
  - Mini light stick with excellent light output for professionals
  - Focus of light beam adjustable via the Advanced Focus System

Delivery:
Ident. No. 010, 020: Includes batteries
Ident. No. 015: Battery pack set, charging station, wrist strap
Ident. No. 023: Battery pack, pocket clip

Ident. No. 010

Ident. No. 015

Ident. No. 020

Ident. No. 023

Model		P 2	P 3 R	P 4	P 4 X
Length (mm)		96	102	140	140
Luminous flux (lm)		14	140	20	120
Lighting range (m)		23	100	27	80
Material		Aluminium	Aluminium	Aluminium	Aluminium
Colour		Black	Black	Black	Black
Type of rechargeable battery/battery		AlMn	Li-Ion	AlMn	Alkali
Number of rechargeable batteries/batteries		1	1	2	2
Rechargeable battery/battery designation		Micro AAA	-	Micro AAA	Micro AAA
56811...	Ident. No.	**010**	**015**	**020**	**023**
		●	●	●	●

Prod. Gr. 5IA

LEDLENSER LED high-performance lamps

Execution:
- High End Power LED
- **Ident. No. 026:**
  - Aluminium housing protected against splash water
  - Dynamic Switch 'Power' and 'Low Power' light modes
  - Removable guard to prevent rolling away
- **Ident. No. 026–032, 042:** Advanced Focus System
- **Ident. No. 032:**
  - The energy wonder for power-conscious users
  - Operated with just one AA Mignon battery
  - Speed Focus using one hand
- **Ident. No. 037:**
  - Advanced Focus System, 3 light functions
  - Extremely bright light thanks to highly precise reflector lens
  - Operated using a rechargeable Li-ion battery
  - Can be easily recharged up to 1000 times
- **Ident. No. 042:**
  - 3 brightness settings
  - Handy switch at the end of the lamp
  - Focused, extremely far-reaching light
  - The excellent all-rounder

Delivery:
Ident. No. 026: Includes batteries and hand strap
Ident. No. 032: Battery, wrist strap, belt bag
Ident. No. 037: Battery pack set, charging station, USB cable, belt bag, wrist strap
Ident. No. 042: Battery pack, belt bag, wrist strap

Ident. No. 026

Ident. No. 032

Ident. No. 037

Ident. No. 042

Model		TT	P 5	P 5 R	P 7
Length (mm)		116	113	117	130
Luminous flux (lm)		280	140	420	450
Lighting range (m)		220	120	240	300
Material		Aluminium	Aluminium	Aluminium	Aluminium
Colour		Black	Black	Black	Black
Type of rechargeable battery/battery		AlMn	Alkali	Li-Ion	Alkali
Number of rechargeable batteries/batteries		3	1	2	4
Rechargeable battery/battery designation		Micro AAA	Mignon AA	-	Micro AAA
56811...	Ident. No.	026	032	037	042
		●	●	●	●

Prod. Gr. 5IA

LEDLENSER LED high-performance head lamps

Execution:
- High End Power LED
- **Ident. No. 101–111:**
  - Advanced Focus System
  - Infinitely variable dimming function
  - Swivel-mounted head
  - The materials used and the ergonomic shape ensure optimum comfort
- **Ident. No. 111:**
  - Long-lasting li-ion battery
  - Convenient charge indicator
- **Ident. No. 113:**
  - Operated with 3 x AAA NiMh batteries
  - Advanced Focus System, Speed Focus
  - Dimmable

Delivery:
Ident. No. 101: Includes batteries
Ident. No. 111: With charger
Ident. No. 113: Battery pack set, USB charging cable

Technical data:
- Number of rechargeable batteries/batteries: 3

Ident. No. 101

Ident. No. 111

Ident. No. 113

Model		H 7.2	H 7R.2	H 8 R
Luminous flux (lm)		250	300	600
Lighting range (m)		160	160	150
Material		Plastic	Plastic	Plastic/aluminium
Colour		Black	Black	Black | Red
Type of rechargeable battery/battery		AlMn	Li-Ion	NiMH
Rechargeable battery/battery designation		Micro AAA	Li-Ion	1.2 V NiMH AAA
56811...	Ident. No.	101	111	113
		●	●	●

Prod. Gr. 5IA

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

VARTA HIGH ENERGY battery

Alkaline-manganese AlMn

Execution:
- Ref. no. 011 and 021 – blister pack of 4
- Ref. no. 031 and 041 – blister pack of 4
- Ref. no. 051 – blister pack of 1

Ident. No. 011

Ident. No. 021

Ident. No. 031

Ident. No. 041

Ident. No. 051

Type		AAA	AA	Baby	Mono	Electric block
Nominal voltage (V/DC)		1.5	1.5	1.5	1.5	9
56815...	Ident. No.	**011**	**021**	**031**	**041**	**051**
		●	●	●	●	●

Prod. Gr. 568

DURACELL Procell high-tech alkaline batteries

10-pack

Delivery:
Pack of 10

Ident. No. 060

Ident. No. 070

Ident. No. 080

Type		AAA	AA	Electric block
Nominal voltage (V/DC)		1.5	1.5	9
56815...	Ident. No.	**060**	**070**	**080**
		●	●	●

Prod. Gr. 568

VARTA Long-life rechargeable batteries/power rechargeable batteries

Nickel metal hybrid (NiMH), ready to use

Execution:
- Ref. no. 112, 122, 132, 142 – blister pack of 2
- Ref. no. 151 – blister pack of 1

Ident. No. 112

Ident. No. 122

Ident. No. 132

Ident. No. 142

Ident. No. 151

Type		AAA	AA	C	D	Electric block
Nominal voltage (V/DC)		1.2	1.2	1.2	1.2	8.4
Rechargeable battery/ battery capacity (mAh)		800	2100	3000	3000	170
56815...	Ident. No.	**112**	**122**	**132**	**142**	**151**
		●	●	●	●	●

Prod. Gr. 568

VARTA Round cells/special battery

Ident. No. 200

Ident. No. 202

Ident. No. 203–295

Type		V 13 GS/357/ SR 44	V 23 GA	V 392	CR 2016	CR 2025	CR 2032	CR 2430	CR 2450
Nominal voltage (V/DC)		1.55	12	1.55	3	3	3	3	3
Rechargeable battery/battery capacity (mAh)		180	38	38	90	170	230	280	560
56815...	Ident. No.	**200**	**202**	**203**	**208**	**209**	**210**	**290**	**295**
		●	●	●	●	●	●	●	●

Prod. Gr. 568

ORION® Set of digit and letter stamps

For manual use without depth limitation

Application:
For labelling parts.

Execution:
- Standard lettering
- Left-engraved
- DIN 1451 typeface
- Close-spaced lettering
- Hardness at end of writing: 58-60 HRC
- Maximum strength: 1200 N/mm²
- Nickel-plated

Delivery:
In plastic box

Character height (mm)				2	3	4	5	6	8	10
Length x width x height				7 x 7 x 75 mm	8 x 8 x 75 mm	9 x 9 x 80 mm	10 x 10 x 80 mm	12 x 12 x 85 mm	14 x 14 x 90 mm	16 x 16 x 90 mm
Surface				Nickel-plated	Nickel-plated	Nickel-plated	Nickel-plated	Nickel-plated	Nickel-plated	Nickel-plated
With depth limiter				No	No	No	No	No	No	No
	Character type provided	Number of stamps (PCS)								
56925...	Numbers	9	Ident. No.	**720** ●	**730** ●	**740** ●	**750** ●	**760** ●	**780** ●	**800** ●
56926...	Letters	27	Ident. No.	**720** ●	**730** ●	**740** ●	**750** ●	**760** ●	**780** ●	**800** ●

Prod. Gr. 577

ORION® Set of figure and letter stamps

For manual use with depth limitation

Application:
For labelling parts

Execution:
- With depth limit
- Standard lettering
- Exactly in the centre
- DIN 1451 typeface
- Close-spaced lettering
- Hardness at end of writing: 58-60 HRC
- Maximum strength: 1200 N/mm²
- Nickel-plated

Delivery:
In plastic box

Character height (mm)				1	1.5	2	2.5	3	4	5	6	8	10
Length x width x height				7 x 7 x 75 mm	7 x 7 x 75 mm	7 x 7 x 75 mm	7 x 7 x 75 mm	8 x 8 x 75 mm	8 x 8 x 75 mm	9 x 9 x 80 mm	11 x 11 x 80 mm	12 x 12 x 85 mm	14 x 14 x 90 mm
Surface				Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated	Nick-el-plated
With depth limiter				Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
	Character type provided	Number of stamps (PCS)											
56930...	Numbers	9	Ident. No.	**010** ●	**015** ●	**020** ●	**025** ●	**030** ●	**040** ●	**050** ●	**060** ●	**080** ●	**100** ●
56932...	Letters	27	Ident. No.	**010** ●	**015** ●	**020** ●	**025** ●	**030** ●	**040** ●	**050** ●	**060** ●	**080** ●	**100** ●

Prod. Gr. 577

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

ICON RIDGE

Set of digit and letter stamps

Low-stress dot face stamps

Execution:
- Manual drive-in punch for manual application
- No notch impact effect or material damage from radius engraving
- Punch pattern according to DIN 1451 (medium)
- Hardness on engraving 58-61 HRC
- Bright-drawn tool steel, silky glass matting.

Delivery:
In break-proof plastic can

No. 56923

No. 56924

Character height (mm)				2	3	4	6	10
Length x width x height				7 x 7 x 75 mm	8 x 8 x 75 mm	9 x 9 x 80 mm	12 x 12 x 85 mm	16 x 16 x 90 mm
	Character type provided	Number of stamps (PCS)						
56923...	Numbers	9	Ident. No.	020 ●	-	-	-	-
56924...	Letters	27	Ident. No.	020 ●	030 ●	040 ●	060 ●	100 ●

Prod. Gr. 577

Safety stamp holder

Application:
Protects hands when punching/stamping

Execution:
- Spring clamping mechanism
- Painted steel housing
- Maximum stamp dimensions 25x25 mm

Technical data:
- Surface: Lacquered

56940...	Ident. No.	010 ●

Prod. Gr. 577

DYMO Labellers

LabelManager 280 P and 420 P

Execution:
- **Ident. No. 032–033:**
  - PC connection option
  - QWERTY keyboard
  - Large display for 2 lines of label text
  - 3 fonts
  - 6 font sizes
  - 7 font styles
  - 8 box shapes
- **Ident. No. 036–037:**
  - Portable, high-performance label printer with PC connection
  - Four-line, backlit display
  - Printable barcodes
  - Labelling tape

Delivery:
Ident. No. 032, 036: Electronic label printer, D1 starter label cartridge (black on white) 12 mm x 3 m, USB cable, battery set, quick user guide and warranty card.
Ident. No. 033: Electronic label printer, 2 x black on white D1 tapes, 12 mm x 7 m, battery set, USB cable, charging adapter, quick user guide and manuals, warranty card
Ident. No. 037: Electronic label printer, 4 x black on white D1 tapes, 12 mm x 7 m, battery set, USB cable, charging adapter, quick user guide and manuals, warranty card

Technical data:
- Belt type: D1
- Type of rechargeable battery/battery: Li-Ion

Ident. No. 032

Ident. No. 033

Ident. No. 036

Ident. No. 037

Model		LM 280	LM 280 SET	LM 420 P	LM 420 P SET
Suitable for band width		6 mm | 9 mm | 12 mm	6 mm | 9 mm | 12 mm	6 mm | 9 mm | 12 mm | 19 mm	6 mm | 9 mm | 12 mm | 19 mm
56959...	Ident. No.	032 ●	033 ●	036 ●	037 ●

Prod. Gr. 578

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Labelling device

LabelManager 160 and LabelManager 210 d

Execution:
- Can be used as table set or as hand-held device
- Simple operation, logical navigation
- Manual tape cutter
- Extensive symbol selection

Delivery:
12-mm labelling tape, black on white, operating manual, without batteries, no mains adapter

Technical data:
- Belt type: D1
- Type of rechargeable battery/battery: NiCd

Ident. No. 041

Ident. No. 042

Model			LM 160	DYMO LM 210 d
Suitable for band width			9 mm | 12 mm | 6 mm	6 mm | 9 mm | 12 mm
56959...		Ident. No.	041	042
			●	●

Prod. Gr. 578

Accessories for			56959 041	56959 042
56959...	Mains adapter	Ident. No.	120	120
			●	●

Label printer

LabelManager PnP

Execution:
- USB PC connection
- Compatible with Windows Vista, 7, XP and Mac OS 10.5.8 or higher
- Integrated software, no installation required
- Li-ion battery is charged via USB

Model		LM PnP
Suitable for band width		6 mm | 9 mm | 12 mm
Belt type		D1
Type of rechargeable battery/battery		Li-Ion
56959...	Ident. No.	081
		●

Prod. Gr. 578

D 1 label tapes

for devices LM 280, LM 420, LM 160, LM 210, LM PnP

Execution:
- Durable plastic labels from a single cartridge (one-tape system)
- For equipment in the LM and LP model series

Technical data:
- Belt type: D1
- Length of tape: 7 m
- Material: PES - Polyester

Colour of tape			Transparent	White	Yellow	White	White	Blue	Red
Lettering colour			Black	Black	Black	Blue	Red	Black	Black
	Width of band (mm)								
56962...	6	Ident. No.	210 ●	240 ●	290 ●	-	-	-	-
56962...	9	Ident. No.	110 ●	140 ●	190 ●	150 ●	160 ●	170 ●	180 ●
56962...	12	Ident. No.	010 ●	040 ●	090 ●	050 ●	060 ●	070 ●	080 ●
56962...	19	Ident. No.	310 ●	340 ●	390 ●	350 ●	360 ●	370 ●	380 ●
56962...	24	Ident. No.	410 ●	420 ●	490 ●	-	-	-	480 ●

Colour of tape			Green	Transparent	Transparent
Lettering colour			Black	Blue	Red
	Width of band (mm)				
56962...	6	Ident. No.	-	-	-
56962...	9	Ident. No.	200 ●	-	-
56962...	12	Ident. No.	100 ●	020 ●	030 ●
56962...	19	Ident. No.	400 ●	-	-
56962...	24	Ident. No.	-	-	-

Prod. Gr. 578

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Industrial labeller
Rhino 4200 and Rhino 5200

Execution:
- Robust label printer
- Specially for labelling cables, wires, switch boxes and other parts
- Large illuminated display
- Shows the entire label prior to printing
- 10 quick-access keys
- Shock-absorbing rubber casing
- Library for customer-specific text
- Extensive range of symbols and text

Delivery:
Ident. No. 125: Manual, 1 x 12 mm vinyl tape, excludes batteries and mains adapter (6 x AA required)
Ident. No. 130: Manual, 1 x 19 mm nylon tape, excludes batteries and mains adapter (6 x AA required) in box
Ident. No. 131: Manual, 1 x 19 mm nylon tape + 1 x 12 mm vinyl tape, li-ion battery, with mains adapter, in robust hard shell box

Technical data:
- Suitable for band width: 6 mm | 9 mm | 12 mm | 19 mm
- Belt type: Rhino Industrie

Ident. No. 125

Ident. No. 130

Ident. No. 131

Model		Rhino 4200	Rhino 5200	Rhino 5200 SET
Type of rechargeable battery/battery		NiCd	NiCd	Li-Ion
56959...	Ident. No.	125	130	131
		●	●	●

Prod. Gr. 578

Accessories for			56959 125	56959 130
56959...	Mains adapter	Ident. No.	120 ●	120 ●

Rhino industrial tapes
for Rhino 4200 and Rhino 5200 devices

Application:
Refill tape

Execution:
- Extreme application conditions
- Resistant to wear, differences in temperature, chemicals, solvents, water and UV rays
- **Ident. No. 710–720, 752:** Ideal for marking bent and textured surfaces
- **Ident. No. 748–750, 755–765:**
  - For rough surfaces
  - Highly resistant to oils and dirt
- **Ident. No. 820–853:**
  - Excellent resistance to scratches, oil and UV
  - Suitable for outdoor use
  - Suitable for a wide range of surfaces

Technical data:
- Belt type: Rhino Industrie

Colour of tape			Yellow	White	Silver metallic	White	Yellow	Grey	Orange
Lettering colour			Black	Black	Black	Black	Black	Black	Black
Length of tape (m)			3.5	3.5	5.5	5.5	5.5	5.5	5.5
Material			Nylon (polyamide)	Nylon (polyamide)	PES - Polyester	PES - Polyester	Vinyl	Vinyl	Vinyl
	Width of band (mm)								
56962...	12	Ident. No.	752 ●	710 ●	755 ●	750 ●	820 ●	834 ●	829 ●
56962...	19	Ident. No.	-	720 ●	765 ●	760 ●	840 ●	-	849 ●
56962...	9	Ident. No.	-	-	-	748 ●	-	-	-

Colour of tape			White	Blue	Green	Red	Black
Lettering colour			Black	White	White	White	White
Length of tape (m)			5.5	5.5	5.5	5.5	5.5
Material			Vinyl	Vinyl	Vinyl	Vinyl	Vinyl
	Width of band (mm)						
56962...	12	Ident. No.	828 ●	832 ●	831 ●	830 ●	833 ●
56962...	19	Ident. No.	848 ●	852 ●	-	850 ●	853 ●
56962...	9	Ident. No.	822 ●	-	-	-	-

Prod. Gr. 578

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

XTL industrial labeller

Thermal transfer label printer for professional use

Application:
use with XTL labels, lettering tapes and heat-shrink tubing

Execution:
- Touchscreen for easy and fast label creation
- integrated label applications
- maximised printing area ensures less labelling waste
- impact-resistant rubber cladding and wipe-clean keyboard
- PC connection for easy transfer from and to Dymo software
- free DYMO ID software
- adjustable printer settings eliminate unnecessary menus and steps.
- QWERTZ keyboard, 41-MB memory, Windows 7 and higher compatible
- power supply with rechargeable li-ion battery or mains adapter
- **Ident. No. 300:** maximum label width 24 mm, 11 printable lines
- **Ident. No. 500:** maximum label width 54 mm, 24 printable lines

Delivery:
complete in stable hard shell box with accessories and labelling tape

Technical data:
- Type of rechargeable battery/battery: Li-Ion

Ident. No. 300

Ident. No. 500

Model		XTL 300	XTL 500
Suitable for band width		12 mm | 19 mm | 24 mm	12 mm | 19 mm | 24 mm | 40 mm
56963...	Ident. No.	300	500
		●	●

Prod. Gr. 578

PROFI-LINE toolboxes

Execution:
- Made of polypropylene, black
- Internal features: 1 end-to-end carrying handle with locking function
- 2 locks
- 1 small parts magazine, removable
- 1 tray, removable
- 1 fixture for a padlock

Delivery:
contains no tools

Technical data:
- Material: PP - Polypropylene

Contents not included

Internal length x internal width x internal height		440 x 230 x 235 mm	475 x 275 x 255 mm	585 x 290 x 280 mm
55390...	Ident. No.	010	020	030
		●	●	●

Prod. Gr. 5IB

Textile tool bag open

with support rod and removable, padded shoulder strap

Execution:
- Combination of extremely sturdy polyester textile material and robust, watertight plastic floor.
- PVC overmould zipper for easy handling
- Numerous pockets, brackets and rubber straps for stowing various tools
- Water level bracket, Velcro strips for long tools
- Special bag for hand saw
- Soft, comfortable carrying handle

Technical data:
- Material: Polyester fibre
- With carry belt: Yes
- Internal length x internal width x internal height: 470 x 355 x 230 mm

55469...	Ident. No.	010
		●

Prod. Gr. 519

ORION synthetic leather tool bag

Synthetic leather

Execution:
- With zip
- With rubber retaining straps
- Without contents
- Size when open: length x width 500 x 275 mm, when closed 240 x 275 x 35 mm

Delivery:
contains no tools

Technical data:
- Material: Faux leather

Contents not included

		010
55400...	Ident. No.	●

Prod. Gr. 598

PARAT tool bag made from synthetic leather

Made from synthetic leather, black

Execution:
- Black
- With zip
- 2 perforated panels
- 20 band clips
- Rubber band to fit the tools to suit your personal requirements
- Transparent compartment on the outside for business cards
- Size when open: length x width 620 x 250 mm, when closed 310 x 250 x 30 mm

Delivery:
contains no tools

Technical data:
- Material: Faux leather

Contents not included

		010
55402...	Ident. No.	●

Prod. Gr. 5IB

Tool rolls

Made from synthetic leather, black

Execution:
- Black
- Profiled pockets
- With buckled belt
- **Ident. No. 010:** Dimensions 280 x 305 mm (L x W)
- **Ident. No. 020:** Dimensions 380 x 320 mm (L x W)
- **Ident. No. 030:** Dimensions 550 x 315 mm (L x W)
- **Ident. No. 040:** Dimensions 750 x 330 mm (L x W)

Delivery:
contains no tools

Technical data:
- Colour: Black

Number of compartments (PCS)		5	8	12	20
55405...	Ident. No.	010 ●	020 ●	030 ●	040 ●

Prod. Gr. 5IB

Universal tool bags

Cowhide, black, grained

Execution:
- Black, grained
- With snap-in locks
- Ring caps
- **Ident. No. 610:** Rear panel with 10 adjustable straps
- **Ident. No. 620:** Rear panel with 8 adjustable straps

Delivery:
contains no tools

Technical data:
- Material: Cowhide leather
- With carry belt: No

Internal length x internal width x internal height		370 x 110 x 250 mm	410 x 160 x 300 mm
55410...	Ident. No.	610 ●	620 ●

Prod. Gr. 5IB

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Tool bag
With central partition, cowhide, black, grained

Execution:
- **Ident. No. 010:**
  - Black, grained
  - With carry strap for use as shoulder bag
  - With castors
  - Reinforced corners
  - Partition panel
  - With snap-in lock and compartments for tools
  - Transparent compartment in cover
  - With reinforced aluminium corners
- **Ident. No. 015:**
  - Made from extra-thick leather
  - Black, Con-Pearl®
  - Polypropylene side panels
  - Front, back and central panels with a total of 17 pockets
  - Transparent keep-safe compartment in the cover
  - Castors
  - Adjustable carry strap
  - Bag section with aluminium corner reinforcement

Advantage:
- **Ident. No. 015:** The 300-mm height also enables hammers or extra-long screwdrivers to be stored

Delivery:
contains no tools

Technical data:
- Material: Cowhide leather
- With carry belt: Yes

Ident. No. 010

Ident. No. 015

Number of compartments (PCS)		15	17
Internal length x internal width x internal height		220 x 140 x 250 mm	230 x 140 x 300 mm
55430...	Ident. No.	**010**	**015**
		●	●

Prod. Gr. 5IB

Tool bags
Cowhide, black, grained

Execution:
- Black, grained
- **No. 55435:**
  - The base and side panels are made of shatter-proof and moisture-resistant HDPE plastic
  - Main bag section reinforced with aluminium corners
  - Parat snap-in locks
  - Base shell
  - Handle
  - Ring caps for carry strap
  - Semi-fold-out front panel, with 11 loops
  - Rear panel with 9 fixed plastic loops
- **No. 55445:**
  - Reinforced panels and base
  - Sheet steel base tray
  - With castors
  - Reinforced corners
  - Ratchet locks
  - CP-7 tool holders on the central and back panels.
  - Fold-out front panel with zips
  - With keep-safe compartment and pocket for small parts

Delivery:
contains no tools

Technical data:
- Material: Cowhide leather
- With carry belt: No

No. 55435
Contents not included

No. 55445
Contents not included

Number of compartments (PCS)		20	10
Internal length x internal width x internal height		420 x 160 x 250 mm	415 x 165 x 275 mm
55435...	Ident. No.	**650**	-
		●	
55445...	Ident. No.	-	**020**
			●

Prod. Gr. 5IB

Tool bags

With central panel, cowhide/ABS plastic, black, grained

Execution:
- Leather/ABS plastic, black, grained
- Bag section with aluminium corner reinforcement
- Semi-fold-out front and rear panels, contains CP-7 tool holders for tools up to 26 mm and 15 mm in diameter
- Handle hole
- Ratchet locks
- Ring caps

Delivery:
contains no tools

Technical data:
- Material: Cowhide leather
- Number of compartments: 10 PCS
- With rollers: No
- With carry belt: Optional
- Internal length x internal width x internal height: 460 x 210 x 340 mm

55448...	Ident. No.	060	●

Prod. Gr. 5IB

Accessories for tool bags

Execution:
- **Ident. No. 200:**
  - Black
  - Adjustable
  - Two karabiner hooks
  - Reinforced shoulder area
- **Ident. No. 210:** For self-attachment on tool cases

Ident. No. 200

Ident. No. 210

55448...	Carrying strap	Ident. No.	200	●
55448...	Ring cap set	Ident. No.	210	●

Prod. Gr. 5IB

Top Line tool bag with drawers

with drawers

Execution:
- Black, grained
- With castors
- Snap-in locks
- Aluminium-reinforced case corners
- Semi-fold-out rear panel with CP-7 tool holder for tools up to 26 mm in diameter
- Removable tray
- With small parts compartments

Delivery:
contains no tools

Material	Faux leather
With rollers	No
With carry belt	No
Internal length x internal width x internal height	410 x 190 x 280 mm

55460...	Ident. No.	040	●

Prod. Gr. 5IB

(Contents not included)

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

PARAT Top Line tool bag with drawers

with drawers

Execution:
- Black, grained
- Reinforced panels and base
- With castors
- Ratchet locks
- Drawer set, 5 pcs, with small parts compartments
- Partition compartment (90 mm) behind the drawers, includes tray
- Fold-out front panel
- Rear panel with CP-7 tool holder for tools up to 15 mm in diameter

Delivery:
contains no tools

(Contents not included)

Material		Cowhide leather
With rollers		No
With carry belt		No
Internal length x internal width x internal height		410 x 220 x 310 mm
55460...	Ident. No.	**060**
		●

Prod. Gr. 5IB

B&W International synthetic leather tool bag

made from synthetic leather, black

Execution:
- Black
- Case with removable central panel
- With 24 tool loops
- 11 tool loops on the rear panel, 10 tool pockets on the front panel.
- Empty weight: 2.8 kg

Contents not included

Material		Faux leather
Number of compartments (PCS)		24
With rollers		No
With carry belt		No
Internal length x internal width x internal height		430 x 320 x 190 mm
55470...	Ident. No.	**010**
		●

Prod. Gr. 538

B&W International Tool bag

Execution:
- Made from extremely durable nylon
- High-quality and durable zips
- Splash-proof base
- Technician's notebook tool case with removable tool trays
- Handle and carry belt
- Lined inner pocket for safely carrying a laptop; a patch pocket with rip-tape fastening on each side
- Shielded compartment for documents

Delivery:
contains no tools

(Contents not included)

Length x width x height		450 x 450 x 200 mm
With rollers		No
Colour		Black
Capable of flying		No
55466...	Ident. No.	**010**
		●

Prod. Gr. 538

B&W International Backpack

Execution:
- Made from extremely durable nylon
- High-quality and durable zips
- Splash-proof base
- Colour black
- Padded rucksack carry system with hip and chest belts
- Padded laptop sleeve
- Removable tool tray
- Front side can be folded up 90°

Delivery:
contains no tools

(Contents not included)

Length x width x height		350 x 350 x 230 mm
With rollers		No
Colour		Black
Capable of flying		No
55466...	Ident. No.	**020**
		●

Prod. Gr. 538

ATORN® Tool cases and wheeled cases

suitable for air transport, made of ABS plastic, black

Application:
Ident. No. 110: For practical transport of tools

Execution:
- **Ident. No. 020:**
  - Made of ABS plastic, black
  - With solid aluminium frame
  - Castors
  - Ratchet hinge
  - Anti-tilt cylinder locks
  - Tool trays made from Con-Pearl, with 25 pockets
  - 400-mm keep-safe compartment
  - Cover flap with 15 pockets and keep-safe compartment
  - Base tray with cover panel, can be divided as required
- **Ident. No. 110:**
  - Made of ABS plastic
  - Black
  - 4x telescopic drawer, 1050 mm in length
  - Tool panel with 25 pockets and 400-mm keep-safe compartment
  - Cover flap with 15 pockets and 400-mm keep-safe compartment
  - Inner tray can be partitioned as required

Advantage:
- **Ident. No. 110:** Extremely stable and easy to pull/slide thanks to large rollers with large wheelbase

Delivery:
contains no tools

Ident. No. 020
(Contents not included)

Ident. No. 110
(Contents not included)

Internal length x internal width x internal height		470 x 180 x 360 mm	470 x 190 x 360 mm
Material		ABS	ABS
Capable of flying		Yes	Yes
55464...	Ident. No.	**020**	**110**
		●	●

Prod. Gr. 538

ATORN® Mobile wheeled tool case

suitable for air transport,made of ABS plastic

Application:
for practical tool transportation

Execution:
- made from ABS with user-friendly telescopic handle and 2 inline rollers
- robust aluminium frame with impact edge protection protects the tools and the case
- 2 toggle locks and Icode combination lock for security
- robust, comfortable carrying handle
- 4 additional feet prevent the shell from being scratched and improve stability
- hinged cover and security lid holder with catch
- document compartment in A4 format
- detachable tool panel with 23 tool compartments on front and rear
- removable cover panel with 15 tool compartments
- variable base shell (2 aluminium dividers, 4 end caps, 2 middle caps)

Advantage:
- Good handling, massive capacity, modern design

Internal length x internal width x internal height		485 x 375 x 200 mm
Load-carrying capacity (kg)		30
Volume (l)		36
Material		ABS
Capable of flying		Yes
Weight (kg)		6.6
55465...	Ident. No.	**150**
		●

Prod. Gr. 538

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Wheeled tool case

Execution:
- Case trays made from highly impact-resistant HDPE plastic
- Robust aluminium frame
- Hinge cover
- Removable lightweight plastic tool trays in the lid
- Lockable telescopic handle
- Lockable
- Inline rollers
- 2 detachable tool panels in cover with 23 pockets on front and rear
- Removable cover panel for base tray with 15 pockets, base tray can be partitioned as required, with cover panel, document compartment in lid

Delivery:
contains no tools

(Contents not included)

Length x width x height		510 x 390 x 230 mm
Material		HDPE - High density polyethylene
Capable of flying		Yes
55475...	Ident. No.	020
		●

Prod. Gr. 538

Wheeled case in king size format

Made from X-ABS plastic, extremely impact-resistant, suitable for air transport

Execution:
- Case trays made from X-ABS plastic, extremely tough, suitable for air transport
- 4x telescopic extension, 1050 mm in length, extra-wide, powder-coated
- Rubberised, large bearing-mounted rollers; wide wheel base
- Inner double aluminium frame
- Ratchet hinge
- Anti-tilt cylinder locks
- Castors
- Carrying capacity up to 40 kg
- Tool trays made from Con-Pearl
- **Ident. No. 010:** Tool tray with 25 pockets and 400-mm keep-safe compartment, tool tray with 10 pockets, cover panel with 15 pockets and 400-mm keep-safe compartment, inner tray can be partitioned as required (approx. 88 mm in height), document compartment in lid, lockable lid holder
- **Ident. No. 020:** Tool tray with 31 pockets, tool tray with 12 pockets, cover panel with 19 pockets and 530-mm keep-safe compartment, base tray with partitioned compartment 560 x 90(67) x 223 mm and fixed compartment 540 x 57 x 140 mm, document compartment in lid, retaining straps for a spirit level in the lid and lockable lid holder

Advantage:
- Extremely tough
- Possible to push or pull the case
- Rubberised, large bearing-mounted rollers; wide wheel base as the case is rolled on its long side making it unlikely to tilt, and ensuring tools inside do not move around much

Delivery:
contains no tools

Ident. No. 010
(Contents not included)

Ident. No. 020
(Contents not included)

Internal length x internal width x internal height		470 x 210 x 360 mm	575 x 220 x 420 mm
Material		ABS	ABS
Capable of flying		Yes	Yes
55476...	Ident. No.	010	020
		●	●

Prod. Gr. 5IB

Tool cases

Execution:
- In highly impact-resistant ABS plastic
- Robust aluminium frame with edge protection against impact
- 2 lockable anti-tilt locks and combination lock
- Adjustable carry belt
- Hinge cover and safety lid support
- Removable tool panel with 21 pockets
- Cover plate with 3 pockets and module plug-in system
- Variably dividable base tray
- Document compartment in lid

Delivery:
contains no tools

Contents not included

Internal length x internal width x internal height		430 x 340 x 170 mm
Material		ABS
Capable of flying		No
55480...	Ident. No.	010
		●

Prod. Gr. 598

Tool case

Execution:
- Case shell made from highly impact-resistant ABS plastic
- Robust aluminium frame with edge protection against impact
- Tool panel with 23 pockets
- Cover panel with 15 pockets
- Separately dividable base tray with rigid dividers
- Document compartment in lid
- **Ident. No. 500:** 2 lockable anti-tilt locks, one 3-digit padlock
- **Ident. No. 600:**
  - 3 lockable anti-tilt locks, one 3-digit padlock
  - With inline rollers and telescopic handle

Ident. No. 500
(Contents not included)

Ident. No. 600

Internal length x internal width x internal height		455 x 160 x 345 mm	485 x 195 x 350 mm
Material		ABS	ABS
Capable of flying		No	No
55481...	Ident. No.	**500**	**600**
		●	●

Prod. Gr. 538

Tool case
Made from X-ABS plastic, black, extremely impact-resistant, suitable for air transport

Execution:
- Made of X-ABS plastic
- Black
- Extremely tough
- Suitable for air transport
- With solid aluminium frame
- Castors
- Ratchet hinge with lock
- Anti-tilt cylinder locks
- Tool panel with 25 pockets and 400-mm keep-safe compartment
- **Ident. No. 010:** Tool tray with 10 pockets, cover panel with 15 pockets, 400-mm keep-safe compartment, base tray with cover panel, height 58 mm, can be partitioned as required, document compartment in lid
- **Ident. No. 120:** Cover panel with 15 pockets, 400-mm keep-safe compartment, base tray with cover panel, height 88 mm, can be partitioned as required, document compartment in lid

Advantage:
- Robust
- Scratch-proof and dust-proof
- Washable

Delivery:
contains no tools

Ident. No. 010
(Contents not included)

Ident. No. 120

Internal length x internal width x internal height		460 x 190 x 310 mm	470 x 200 x 360 mm
Material		ABS	ABS
Capable of flying		Yes	Yes
55485...	Ident. No.	**010**	**120**
		●	●

Prod. Gr. 5IB

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

PARAT CLASSIC Plus CP-7, CLASSIC Deep Space CP-7 and CLASSIC KingSize Power CP-7

Tool case made from X-ABS plastic, black, extremely impact-resistant, suitable for air transport

Execution:
- made from X-ABS plastic, ready to fly, colour black
- 1 tool panel , 2-sided, with CP 7 tool holders up to 11 and 15 mm
- with solid double aluminium frame
- document compartment in lid , robust glide runners
- lockable toggle locks
- ergonomically designed handle with soft-touch surface
- **Ident. No. 055:** 1 tool panel with CP 7 tool holders of up to 11 mm
- **Ident. No. 055, 095:** 1 base shell with cover panel, height 58 mm, freely dividable
- **Ident. No. 085:**
  - 1 cover panel with CP 7 tool holders of up to 26 mm
  - 1 base shell with cover panel, height 88 mm, freely dividable
- **Ident. No. 095:** 1 tool panel and 1 cover panel each with CP 7 tool holders of up to 26 mm

Delivery:
contains no tools

Ident. No. 055

Ident. No. 085

Ident. No. 095

Internal length x internal width x internal height		460 x 190 x 310 mm	470 x 210 x 360 mm	471 x 211 x 361 mm
Material		ABS	ABS	ABS
Capable of flying		Yes	Yes	Yes
55490...	Ident. No.	055	085	095
		●	●	●

Prod. Gr. 5IB

PARAT Aluminium tool cases

made from anodised aluminium, silver, suitable for air transport

Execution:
- Anodised aluminium, silver
- Double aluminium frame
- Ratchet hinge
- Anti-tilt cylinder locks
- Handle with padded recessed grips
- Castors
- Loadability up to 30 kg
- Tool trays made from durable Con-Pearl
- Tool tray with 25 pockets and 400-mm keep-safe compartment, tool tray with 10 pockets, cover panel with 15 pockets, 400-mm keep-safe compartment, base tray with cover panel, height 58 mm, can be partitioned as required, document compartment in lid

Delivery:
contains no tools

Contents not included

Internal length x internal width x internal height		460 x 170 x 310 mm
Material		Aluminium
Capable of flying		Yes
55495...	Ident. No.	010
		●

Prod. Gr. 5IB

B&W International Polypropylene tool case

Extremely resilient, suitable for air transport

Execution:
- Impact-resistant polypropylene case, super-stable and can be stacked
- Automatic air-pressure equalisation valve
- Dustproof and waterproof to IP 67
- Eyelets for padlock
- Temperature-resistant from -40°C to +80°C
- **Ident. No. 670:**
  - Removable tool tray in the lid
  - Volume 12 l, max. payload 30 kg
  - Removable cover panel with loops for the base tray, closable base tray, can be divided as required using aluminium divider system
- **Ident. No. 670–690:** Ergonomic two-component handle
- **Ident. No. 680:** Volume 23 l, max. payload 30 kg
- **Ident. No. 680–690:**
  - Document compartment in lid
  - Removable cover panel with pockets for the base tray, closable base tray, can be divided as required using aluminium divider system
- **Ident. No. 690:** Volume 33 l, max. payload 30 kg
- **Ident. No. 710:**
  - Ergonomic two-component handles
  - Solid telescopic handle resistant to torsion
  - Volume 38 l, max. payload 50 kg
  - Internal features: A4 document compartment, removable tool tray in lid with 22 tool pockets on the front and back, removable cover panel for the base tray with 14 tool pockets, base tray can be partitioned as required by aluminium partition system

Advantage:
- Indestructible and shatterproof
- **Ident. No. 710:** Easy to move around thanks to two large inline rollers

Delivery:
contains no tools

Ident. No. 670

Ident. No. 680

Ident. No. 690

Ident. No. 710

Model		JET3000	JET5000	JET6000	JUMBO6700
Internal length x internal width x internal height		329 x 233 x 152 mm	432 x 301 x 170 mm	473 x 351 x 197 mm	535 x 360 x 195 mm
Material		PP - Polypropylene	PP - Polypropylene	PP - Polypropylene	PP - Polypropylene
Capable of flying		Yes	Yes	Yes	Yes
55481...	Ident. No.	670	680	690	710
		●	●	●	●

Prod. Gr. 538

Rolling tool case

Made from HDPE plastic

Execution:

- **Ident. No. 005:**
  - Made from polypropylene plastic
  - Smooth-running rollers
  - High-quality hinges
  - 2 lockable locks
  - Base tray can be partitioned as required, with cover panel
- **Ident. No. 005–010:**
  - Robust aluminium frame
  - Latching telescopic handle
  - 2 tool panels with pockets
  - 1 document compartment
- **Ident. No. 010:**
  - Made of HDPE plastic
  - Large, smooth running transport rollers
  - Rubber feet
  - 2 locks, TSA closure
  - 3 small parts boxes, internal base tray with pre-cut foam for transporting delicate parts
- **Ident. No. 030:**
  - Case linings produced from HDPE (fibre glass-reinforced plastic)
  - Connected by interlocking aluminium frames
  - Document pocket in cover, 2 tool panels with plug-in pockets
  - Base shells filled with pre-cut foam
  - 2 TSA locks

Delivery:
contains no tools

Ident. No. 005

Ident. No. 010
Contents not included

Ident. No. 030

Model		Atomik-Wheels	Turtle Wheels 300 PTS	Rock 350 PTS
Internal length x internal width x internal height		465 x 352 x 255 mm	470 x 390 x 300 mm	470 x 390 x 347 mm
Load-carrying capacity (kg)		25	40	40
Material		PP - Polypropylene	HDPE - High density polyethylene	HDPE - High density polyethylene
Capable of flying		Yes	Yes	Yes
55496...	Ident. No.	005	010	030
		●	●	●

Prod. Gr. 538

Tool case

With aluminium die casting frame, extremely impact-resistant, indestructible and suitable for air transport

Execution:

- Case shells made of ABS plastic
- Opening system with 2 70 N pressurised gas cylinders
- Extremely solid aluminium die-cast frame manufactured from a single piece
- High and robust feet screwed into the frame
- Two lockable cylinder locks in the frame
- Ergonomic trolley function (105 mm high) with spring-mounted rubber wheels
- 1 tool panel with 23 push-in compartments on the front side and one document shelf on the back side
- **Ident. No. 040:**
  - 1 tool panel with 28 push-in compartments on the front side and 17 push-in compartments on the back side
  - Base shell has 5 removable inserts, additional aluminium frame for up to 35 kg carrying capacity
- **Ident. No. 040, 060:** 11 additional pockets on the base plate
- **Ident. No. 050:** Two additional Open Toolfix tool holders on the base plate
- **Ident. No. 050–060:**
  - 1 tool panel with 2 Open Toolfix tool holders with rubber-coated plug-in lamellae on the front side and 2 Open Toolfix tool holders on the back side
  - Base shell has 5 removable compartment inserts, additional aluminium frame for up to 45-kg carrying capacity

Advantage:

- Lightweight and secure opening and closing

Ident. No. 040

Ident. No. 050

Ident. No. 060

Model		ToolCase Premium XLT	ToolCase Superior XLT	ToolCase Superior XLT-34/4F
Internal length x internal width x internal height		485 x 250 x 410 mm	485 x 250 x 410 mm	485 x 250 x 410 mm
Material		ABS	ABS	ABS
Capable of flying		Yes	Yes	Yes
55499...	Ident. No.	040	050	060
		●	●	●

Prod. Gr. 500

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

ATORN® Leather tool bag with VDE tool assortment, 17 pieces

Execution:
- Robust, lockable leather tool case
- VDE tools according to DIN EN 60900
- Pliers with two-component handle and chrome-plated head
- Screwdriver with protective insulation and ergonomic two-component handle

Advantage:
- Produced to the highest standard of quality and tested individually

Technical data:
- VDE certified: Yes

52560... | Ident. No. 300

Prod. Gr. 582

Hard tool case with tool assortment, 48 pieces

60-piece

Execution:
- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors and ratchet hinges
- Lockable anti-tilt cylinder locks
- equipped with high-quality and robust ATORN, ORION and branded tools

Advantage:
- For heavy-duty use

Delivery:

1	folding wooden rule, 2 m
1	aluminium spirit level, 400 mm
1	tape measure, 3 m
12	combination wrenches, size 6/7/8/9/10/11/12/13/14/17/19/22 mm
3	slotted screwdrivers 4.5 x 90/5.5 x 100/6.5 x 125 mm
2	cross-head screwdrivers PH 1/PH 2
4	VDE slotted screwdrivers 2.5 x 75/4 x 100/5.5 x 125/6.5 x 150 mm
2	VDE cross-head screwdrivers PH 1/PH 2
1	voltage tester 3 x 65 mm
1	pair of automatic wire strippers
1	safety knife
1	pair of tweezers, 110 mm
1	pair of multi-purpose shears
1	pair of side-cutters, 165 mm
1	pair of flat-nose round pliers, 160 mm
1	pair of water pump pliers, 240 mm
2	machinist's hammers, 200/500 g
1	pair of combi pliers, 180 mm
1	plastic hammer 32 mm
1	reamer, 100 mm
1	scriber
1	flat chisel, 175 mm
1	set, 6 pcs, (5 drift punches 2-6 mm/1 centre punch)
3	workshop files with grip, 150 mm, C2: flat/round/half-round
8	hex. screwdriver, 2-10 mm
1	metal saw bow with blade, 300 mm
1	screw clamp, 200 mm

52560... | Ident. No. 500

Prod. Gr. 580

ATORN® Hard tool case with tool assortment, 48 pieces

48-piece

Execution:
- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors
- Ratchet hinges
- Lockable anti-tilt cylinder locks
- Equipped with high-quality and robust ATORN tools

Advantage:
- For heavy-duty use

Delivery:
9 combination wrenches, size 8/9/10/11/13/14/15/17/19 mm, 2 Phillips screwdrivers PH 1 x 80 mm, PH 2 x 100 mm, 1 hexagon socket wrench insert, long, with ball head size 1.5 to 10, 1 TX wrench set with ball head TX 9 to 40, 3 slotted screwdrivers 4.5 x 90 mm/6.5 x 125 mm/8.0 x 150 mm, 1 machinist's hammer, 500 g, 1 pair of combination pliers, 180 mm, 1 pair of snipe nose pliers, 1 pair of side cutters, 165 mm, 1 pair of water pump pliers, 250 mm, 1 aluminium handsaw bow, 300 mm, 10 saw blades for metal, 1 folding rule, 2 m

52560... | Ident. No. 600

Prod. Gr. 582

ATORN® Roller tool case with 38-piece tool assortment

Execution:
- Highly impact-resistant ABS plastic
- With solid aluminium frame
- With castors and ratchet hinges
- Lockable anti-tilt cylinder locks
- Equipped with high-quality and robust ATORN tools

Delivery:
1 wheeled case 470 x 190 x 360 mm, 1 combination spanner 9 pcs 8–19 mm, 1 hexagonal socket screwdriver 9 piece, 1 TX screwdriver flap holder, 8 piece, 1 screwdriver 4.5 x 90 mm, 1 screwdriver 6.5 x 125 mm, 1 screwdriver 8.0 x 150 mm, 1 screwdriver PH 1 x 80 mm, 1 screwdriver PH 2 x 100 mm, 1 3C machinist's hammer 0.3 kg, 1 combination pliers 180 mm, 2-component handle, 1 pair of snipe nose pliers 200 mm, bent, 2-component handle, 1 pair of water pump pliers 250 mm, chrome plated, 1 pair of side cutters 165 mm, 2-component handle, 1 soft-face hammer, recoil-free, 30 mm, 1 utility knife with 18-mm snap-off blade

52560... | Ident. No. 700

Prod. Gr. 582

ATORN® Tool case with 50-piece tool assortment

Application:
Tool case equipped with wide range of tools, with hard foam inlay – all tools are neatly laid out and held securely.

Execution:
- Robust and durable tools in industrial quality
- Screwdriver, pliers and reversible ratchet with two-component handles with perfect ergonomic functionality
- case external dimensions: H 440 x W 505 x D 130 mm

Advantage:
- Case features sandwich frame construction that affords the case a large carrying capacity
- Fasteners closed with your knees firmly press the case together and give it excellent stability
- Softtouch grip; provides support and comfort when being worn
- Easy to open the case on both sides; tools are held securely in foam and cannot fall out
- Partition panel in the centre of the case also provides optimum protection for tools

Delivery:

1	DIN 3113 A combination wrench set, chrome-plated 8 pcs, size 8-19 mm
1	½" hexagon socket wrench inserts, in size 10 to 24 mm
1	½" hexagon spark plug insert, w. rubber insert wrench 20.8
1	½" reversible ratchet, with quick-release button 255 mm
1	½" handle with slide piece and cardan joint, 70 mm
1	½" extension, 125 mm and 250 mm
1	hexagon ball end L-key set, 9 pcs, long, size 1.5-10 mm
1	workshop screwdriver, slotted 0.8 x 4.5/1.0 x 5.5/1.2 x 6.5 mm,
1	circular blade
1	cross-head screwdriver, PH 1 x 80 and PH 2 x 100 mm
1	machinist's hammer, DIN 1041 with nylon protective handle sleeve, 300 g
1	pair of water pump pliers, 250 mm
1	pair of combination pliers, 180 mm
1	pair of side-cutters, 160 mm
1	VDE single-pin voltage tester, 150–250 volt
1	pocket measuring tape, end hook with magnet, 5 metres
1	pair of flat-nose round pliers, 200 mm
1	universal knife, w. 18-mm snap-off blade
1	LED pen light, incl. battery
1	universal voltage tester, 6–24 volt

52560... | Ident. No. 800

Prod. Gr. 582

GEDORE Tool case with Touring 1000 tool assortment

Touring 1000

Execution:
- 47 vanadium steel tools
- Chrome-plated
- In plastic case
- External case dimensions 420 x 320 x 115 mm

Advantage:
- Tool assortment based on practical experience

Delivery:

11	combination wrenches 6/7/8/10/11/12/13/14/15/17/19 mm
4	slotted screwdrivers 3/4/5.5/6.5 mm
2	cross-head screwdrivers PH 1-2
8	hex screwdrivers in holder 2/2.5/3/4/5/6/8/10 mm
1	pair of combi pliers, 180 mm
1	pair of side-cutters, 160 mm
1	pair of water pump pliers, 250 mm
9	½" drive hex inserts, size 10/11/12/13/14/15/17/19/22 mm
1	spark plug insert, 20.8 mm
1	reversible ratchet
1	cardan joint
1	T-handle
2	extensions 125/250 mm
1	voltage tester
1	machinist's hammer, 300 g
1	small parts container
1	folding knife

52620... | Ident. No. 015

Prod. Gr. 530

HAZET Tool cases with tool assortment

Execution:
- Tools neatly laid out and secure in two-tone soft foam inlay
- Impact-resistant plastic case tray
- 56 pieces
- External dimensions 445 x 360 x 106 mm, content

Delivery:
1 double open-end wrench 6 x 7, 8 x 9, 10 x 11, 12 x 13, 14 x 15, 16 x 17, 18 x 19, 21 x 22 mm, 1 slotted screwdriver 4/5.5/6.5 mm, 1 Phillips screwdriver PH 1, PH 2, PZ 2, 1 hexagonal Allen key 2, 3, 4, 5, 6, 8 mm, 1 TX foldaway hand case T 9, 10, 15, 20, 25, 27, 30, 40, 1 ratchet 3/8 inch, 1 extensions 74, 150 mm/3/8 inch, 1 hex socket wrench inserts 8, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22/3/8 inch, 1 pair of universal pliers, 260 mm, 1 universal knife, 160 mm, 1 tape measure, 2 m, 1 universal shears, 180 mm. 1 machinist's hammer, 500 g, 1 LED pocket torch, 150 mm, 1 metal saw bow, 150 mm, 1 pair of side cutters, 165 mm, 1 transparent container

52620... | Ident. No. 030

Prod. Gr. 569

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

HEYCO HEYTEC assembly tool box

With tool modules

Execution:
- 5-piece sheet steel tool box hammer-finish lacquered in blue
- lid can be closed using a U-lock
- 96-piece industrial tool assortment stored in 5 hard foam modules
- external dimensions of case 530x200x200 mm, complete weight 14.5 kg

Advantage:
- clear and orderly tool placement
- easily check whether the contents are complete at a glance.

Delivery:

1 each of	combination spanner 8,10,11,12,13,14,15, 16,17,19,22,24 mm
1 each of	slotted screwdriver 4/5.5/6.5 mm
1 each of	Phillips screwdriver PH 1, PH 2
1 each of	hexagonal Allen key 1.5/2/2.5/ 3/4/5/6/8/10 mm
1	bit box - 32 pieces with magnetic bit holder and drive handle
1	ratchet 1/2 inch
1 each of	extensions 125 and 250 mm, cardan joint/1/2 inch
1 each of	hexagonal socket wrench inserts 10,11, 12,13,14,15,16,17,18,19,20,21,22,24, 27,30,32 mm/1/2 inch
1	combination spanner 180 mm
1	utility knife 170 mm
1	tape measure 5 m
1	water pump pliers 250 mm
1 each of	machinist's hammer 300 g, sledge hammer 1000 g
1	LED telescopic pocket torch 195-570 mm
1	roller open-ended spanner 255 mm
1	side cutters 160 mm
1 each of	centre punch, pin punch 3 and 4 mm, drift punch 3 mm

52620... | Ident. No. 050

Prod. Gr. 580

ORION® Tool assortment

Files and saws, 11-piece

Delivery:

1	flat blunt-end file 300 mm, cut 1
1	flat blunt-end file 300 mm, cut 3
1	triangular file 250 mm, cut 1
1	triangular file 250 mm, cut 3
1	round file 250 mm, cut 2
1	square files 250 mm, cut 2
1	half-round file 250 mm, cut 2
1	file brush
1	saw bow 300 mm
1	bi-metal saw blade
1	chip brush

52561... | Ident. No. 010

Prod. Gr. 6AF

Tool assortment

Hammers, chisels and pliers, 20-piece

Delivery:

1	machinist's hammer, 300 g
1	machinist's hammer, 500 g
1	chisel/drift/6-piece centre punch set
1	dividing caulker 150 mm
1	pair of safety goggles
1	slotted screwdriver, 6.5 mm
1	pair of leather work gloves
1	hand brush
1	pair of ear defenders
1	triangular hollow scraper, 150 mm
1	cutter knife with trapezoidal blade
1	recoil-free soft-face hammer, 40 mm
1	pair of side-cutters, 165 mm, w. 2-C handle sleeve
1	pair of water pump pliers, 250 mm
1	cross-head screwdriver PH 2

52561... | Ident. No. 020

Prod. Gr. 593

ATORN® Tool assortment

For electricians, 18-piece

Delivery:

1	VDE screwdriver, 6 pcs, slotted/PH
1	voltage tester screwdriver
1	control cabinet key
1	pair of VDE combi pliers 180 mm
1	pair of VDE snipe-nose pliers, 200 mm, curved
1	pair of VDE side-cutters, 160 mm
1	pair of automatic wire strippers
1	electrician's knife
1	pair of wire end ferrule pliers, 0.25-16 mm²
1	BENNING DUTEST continuity tester
1	LED pen light with batteries
1	ERSA Multitip soldering iron C 25
1	solder, 250 g

52561... | Ident. No. 030

Prod. Gr. 597

Tool assortment

For industrial electronic engineers, 92 pieces

Delivery:

1	machinist's hammer, 0.4 kg
1	plastic hammer D 32
1	half-round file, 200 mm, cut 2
1	hardwood file grip, 110 mm long
6	key files, 100 mm, cut 2
1	mini universal saw, 240 mm
8	combination wrench, 8-19 mm
6	hexagon screwdriver, 2-6 mm, in plastic pouch
1	socket wrench set; 1/4", 42 pieces
7	VDE slotted screwdriver
1	long-nose flat pliers, 160 mm, chrome-plated, VDE
1	flat-nose round pliers, 200 mm, chrome-plated, curved 45 G, VDE
1	VDE combination pliers, 180 mm, chrome-plated
1	VDE side-cutters, 140 mm
1	multi-purpose shears, 190 mm
1	crimping pliers for insulated connections, 210 mm
1	metal universal wrench, for control cabinet
1	comb. Contact screwdriver
1	universal cable knife
1	cable stripper
1	pair of round pliers, 160 mm, chrome-plated VDE
1	pair of side-cutters, 160 mm, chrome-plated VDE
1	pair of water pump pliers, 250 mm
1	cable and assembly knife
1	pair of automatic wire strippers
1	voltage tester
1	pair of wire strippers, 160 mm
1	wooden folding rule, 2 m

52560... | Ident. No. 010

Prod. Gr. 580

Tool assortment

For industrial mechanics, 78-piece

Delivery:

1	spirit level, 500 mm
1	machinist's hammer, 0.5 kg
1	plastic hammer D 40
6	chisels, in sheet metal box
1	pair of blind rivet pliers, NTS model, in assortment
1	scriber with steel tip, 165 mm
1	flat blunt-end file, 200 mm, cut 2
1	round file 200 mm, cut 2
1	half-round file, 200 mm, cut 2
1	triangular file, 200 mm, cut 2
4	hard wood file grips, 110 mm
1	triangular hollow scraper, chrome-van. 150 mm
1	metal saw bow for saw blade, 300 mm
10	handsaw blade, HSS-Bi.Flex. 300 mm, 24 teeth
12	combination wrench, size 10-32 mm
8	hexagon screwdrivers, 2-10 mm, in plastic pouch
6	screwdrivers in box
1	water pump pliers, 250 mm
1	1½" pipe wrench, 425 mm
1	heavy-duty side-cutters, uncoated, 160 mm
1	pair of combination pliers, uncoated, 180 mm
1	pair of three-way pliers, chrome-plated, 160 mm
1	pair of pliers for retaining rings, straight 19-60 mm Ø type J 2
1	pair of pliers for retaining rings, straight 19-60 mm Ø type A 2
1	pair of stainless steel hole scissors, left, 250 mm
1	pair of stainless steel hole scissors, right, 250 mm
1	½ " square socket wrench set; in metal case; 13 pcs
1	pair of V-block gripping pliers, 250 mm
1	pocket tape measure, 3 m
1	precision pocket callipers, 150 mm
1	pair of universal safety goggles
1	safety knife with 3 trapezoidal blades
1	pair of work gloves

52560... | Ident. No. 020

Prod. Gr. 580

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

Tool assortment, universal, 117 pieces

In 4 soft foam inlays

Delivery:

3	screwdriver socket wrench inserts for slotted screws 6.3 = 1/4" 0.6 x3.5 1x5.5 1.2x8
2	screwdriver socket wrench inserts for cross-head screws PH1 and PH2
2	screwdriver socket wrench inserts for Pozidrive screws PZ1 and PZ2
12	hex socket wrench inserts ☐ nominal drive size 6.3 = ¼" 4-14
5	screwdriver inserts for hex socket screws nominal drive size 6.3 = ¼" 3-8
1	reversible ratchet 115/6.3 = ¼"
1	T-handle 115/6.3 = ¼"
1	drive handle 134/6.3 = ¼"
2	extensions 55, 147/6.3 = ¼"
1	universal joint 36.5/6.3 = ¼"
21	socket wrench inserts ☐ nominal drive size 12.5 = ½" 10-34
1	T-handle 298/12.5 = ½"
1	reversible wrench 275/12.5 = ½"
2	extensions 123, 248/12.5 = ½"
1	universal joint 70/12.5 = ½"
2	flat chisels, 18 x 150, 24 x 200
1	centre punch 10 x 120
4	pin punches 150, Ø 3, 4, 5 and 6
1	flat scraper 150
1	plastic soft-face hammer Ø 35
1	magnetic finder 545 Ø 15
1	Allen key set 015, 02, 025, 03, 04, 05, 06, 08, 10
1	machinist's hammer, 500 g
1	sensor gauge 0.05-1.0
1	tape measure, 2 m
17	combination wrenches 6-24
9	double-end box wrenches 6 x 7 - 21 x 23
1	screwdriver 1 x 5.5 x 25
1	screwdriver PH2, 25
1	screwdriver 0.4 x 2.5 x 75
1	screwdriver 0.5 x 3 x 160
1	screwdriver 0.6 x 3.5 x 100
1	screwdriver 0.8 x 4 x 100
1	screwdriver 1.2 x 6.5 x 150
1	screwdriver 1.2 x 8 x 150
1	screwdriver PH1, 80
1	screwdriver PH2, 100
1	pair of universal pliers 260
1	pair of heavy-duty pliers 180
1	pair of flat-nose round pliers 165

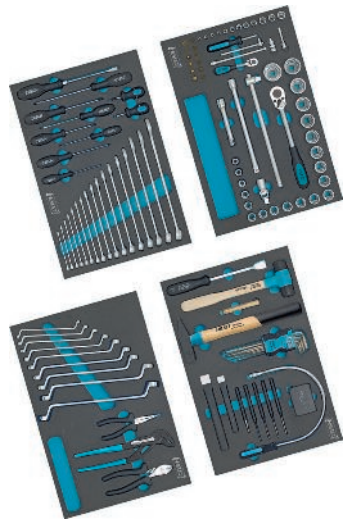

50276... | Ident. No. 032

Prod. Gr. 506

Tool assortment

For industrial use, 95-piece

Delivery:

5	screwdriver socket wrench inserts for hexagon socket screws 6.3 = 1/4" 3-8
3	screwdriver socket wrench inserts for slotted screws 6.3 = 1/4" 0.6 x3.5 1x5.5 1.2x8
2	screwdriver socket wrench inserts for cross-head screws PH1 and PH2
2	screwdriver socket wrench inserts for Pozidriv screws PZ1 and PZ2
2	adjustable open-end wrenches 158, 255
10	double open-end wrenches 6 x 7 - 30 x 32
10	double open-end box wrenches 6 x 7 - 30 x 32
2	flat chisels 18 x 150, 24 x 200
1	cross-cut chisel 6 x 150
2	drift punches 2 x 120, 4 x 120
1	centre punch 120
3	pair of universal pliers 180, 260, 310
1	screwdriver 1.0 x 5.5 x 125
1	screwdriver 1.2 x 8.0 x 150
1	screwdriver 1.6 x 10.0 x 175
1	screwdriver 0.4 x 2.5 x 75
1	screwdriver 0.5 x 3.0 x 80
1	screwdriver 0.6 x 3.5 x 100
1	screwdriver 0.8 x 4.0 x 100
1	screwdriver PH1, 80
1	screwdriver PH2, 100
1	screwdriver PH3, 147
1	screwdriver PZ1, 73
1	screwdriver PZ2, 94.5
13	hex socket wrench inserts ☐ nominal drive size 6.3 = ¼" 4-14
1	reversible ratchet 115/6.3 = ¼"
1	T-handle 115/6.3 = ¼"
1	drive handle 134/6.3 = ¼"
2	extensions 55, 147/6.3 = ¼"
1	universal joint
19	hex socket wrench inserts ☐ nominal drive size 12.5 = ½" 10-34
1	T-handle 298/12.5 = ½"
1	reversible ratchet 275/12.5 = ½"
2	extensions 123, 248/12.5 = ½"
1	universal joint 12.5 = ½"
1	pair of side-cutters 180
1	pair of flat-nose round pliers 200
1	plastic soft-face hammer Ø 35
1	metal saw 390 with blade
1	small metal saw 252 with blade
1	machinist's hammer, 500 g
1	tape measure, 2 m
1	folding knife 159.9 mm

50276... | Ident. No. 035

Prod. Gr. 506

Mobile floor stand

For attachment of rubbish bags and paper towels

Execution:
- Suitable for roll width up to 42 cm
- Mobile
- Painted blue

69726...	Ident. No.	010
		●

Prod. Gr. 650

Accessories for		69726 010
50072... Refuse bag, universal, fits 70-litre and 120-litre bins Flat bag made of LDPE,	Ident. No.	550 ●
69726... Paper towels 1000 sheets per roll, Sheet size 36 x 24 cm, diameter 38.5 cm	Ident. No.	110 ●
69726... Paper towels 1000 sheets per roll, Sheet size 36 x 36 cm, diameter 37.5 cm	Ident. No.	120 ●

3M Fabric adhesive tapes 1909

heat-resistant up to 60°C

Application:
For universal applications, such as bundling, fastening or repairing.

Advantage:
- Very good adhesion on different surfaces
- Can easily be torn by hand
- Moisture-resistant

Notes:
We recommend you request the safety data sheet with your first order.

Technical data:
- Width of tape x length of strap: 50 mm x 50 m
- Thickness: 0.26 mm
- Colour: Black
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated fabric
- Breaking elongation: 12 %

69771...	Ident. No.	120
		●

Prod. Gr. 6RM

3M Premium fabric adhesive tapes 389

heat-resistant up to 70°C

Application:
For industrial applications such as marking, strengthening, repairing, sealing joints and air-conditioning ducts, bundling pipes, materials etc.

Execution:
- Close-meshed fabric adhesive tape with matt surface

Advantage:
- Excellent adhesive strength on a variety of surfaces
- Outstanding moisture resistance
- Adapts easily for use on uneven surfaces
- Good tear resistance and flexibility

Notes:
We recommend you request the safety data sheet with your first order.

Technical data:
- Width of tape x length of strap: 50 mm x 50 m
- Thickness: 0.26 mm
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated rayon fabric
- Breaking elongation: 6 %

Colour		Silver grey	Black
69771...	Ident. No.	220	230
		●	●

Prod. Gr. 6RM

Ident. No. 220

Ident. No. 230

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.
www.iconridge.com
ICON RIDGE

UV-resistant premium fabric adhesive tape 8979

heat-resistant up to 90°C

Application:
For reinforcing, bundling, sealing, insulating, splicing, marking.

Advantage:
- Can be removed up to 6 months later without leaving residue
- UV resistant and can be used outdoors for up to 12 months
- Moisture-resistant

Notes:
We recommend you request the safety data sheet with your first order.

Technical data:
- Width of tape x length of strap: 48 mm x 48 m
- Thickness: 0.33 mm
- Colour: Blue
- Type of adhesive: Rubber/resin
- Adhesive tape backing material: PE-coated fabric
- Breaking elongation: 21 %

69771...	Ident. No.	180
		●

Prod. Gr. 6RM

Scotch® PVC packaging adhesive tapes 6890

High-quality, low-noise packaging tape

Execution:
- Humidity-resistant and resistant to chemicals

Advantage:
- Silent unrolling
- Can be torn off by hand

Notes:
We recommend you request the safety data sheet with your first order.

Technical data:
- Width of tape x length of strap: 50 mm x 66 m
- Thickness: 0.05 mm
- Type of adhesive: Natural rubber
- Adhesive tape backing material: PVC
- Breaking elongation: 75 %

Ident. No. 485

Ident. No. 490

Colour		Brown	Transparent
69772...	Ident. No.	485	490
		●	●

Prod. Gr. 6RM

Accessories for		69772 485	69772 490
69772... Scotch HE 180 hand roller for Scotch PVC package adhesive tape 6890	Ident. No.	650 ●	650 ●

Extremely robust hand dispenser for adhesive tapes

Ideal for continuous use

Application:
for use with package adhesive tapes with a length of up to 66 m and width of 50 mm.

Execution:
- With notch trigger
- Two pressure rollers
- Extremely robust

69772...	Ident. No.	601
		●

Prod. Gr. 686

3M Soft PVC adhesive tapes
for indoor use

Application:
For marking, barricading, bundling, protecting and covering. Ideal for indicating hazards.

Execution:
- Highly elastic backing material

Advantage:
- Solvent-resistant
- High initial adhesive strength
- Supple even on uneven surfaces

Notes:
We recommend you request the safety data sheet with your first order.

Type description		766i	767i
Width of tape x length of strap		50 mm x 33 m	50 mm x 33 m
Colour		Black | Yellow	Red | White
Breaking elongation (%)		180	180
69772...	Ident. No.	505	515
		●	●

Prod. Gr. 6RM



Ident. No. 505

Ident. No. 515

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.

Source: Hahn+Kolb Werkzeuge GmbH
Technical data subject to change.
Availability subject to country specific rules and regulations.