


CP6501K, CP8601K



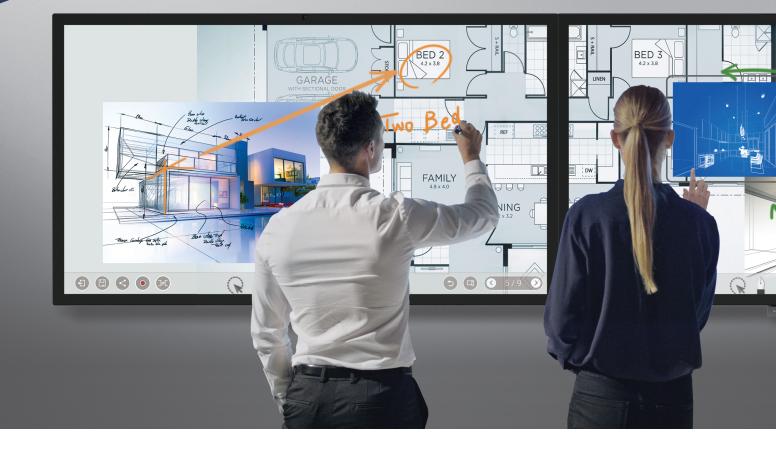

# DuoBoard Corporate Interactive Flat Panel

BenQ DuoBoard is designed to tap into the dynamic possibilities of the modern meeting room and help businesses develop and maintain an environment where ideas flow freely. It allows for extended, seamless team collaboration, stimulating more innovative ideas and is perfect for fostering collaboration then turning your creativity into reality.



# Maximize Team Efficiency with Collaboration+



Duo Boards

With DuoBoard, you can link two IFPs together, allowing users to seamlessly double the collaboration space and develop borderless ideas.



Duo Windows

Duo Windows allows users to work on two tasks at the same time on a single IFP, saving time and doubling efficiency.



Duo OS

Duo OS achieves cross-platform compatibility between Android, iOS, macOS, and Windows OS. Insert the OPS into the DuoBoard for a quick switch between the Android and OPS applications, even in full screen size.








# Duo Users

Duo Users allows multiple users to co-work simultaneously on a single app for specific topic discussion, fostering team collaboration.



# Board to Board

EZWrite Cloud Whiteboard allows multiple users to use the IFP and their mobile devices or laptops in different locations, ensuring users have access to their important materials everywhere.



# Portrait Mode


Easily rotate the DuoBoard to switch from Landscape to EZWrite Portrait mode. In Portrait mode, users can see more details of the vertical image and annotate on EZWrite vertically. \*Only CP6501K supported

# Anywhere Annotation Using Your Own Device



# Annotate and Collaborate Everywhere with the Cloud

Boasting powerful cloud features, EZWrite streamlines discussions by letting employees share notes and ideas whether they are in the office, at home, or on a business trip. With BenQ's exclusive AMS (Account Management Service) service, employees can save materials in the cloud and access them directly from the BenQ IFP, without need for a laptop or smart device.



## Intelligent Handwriting Recognition

EZWrite's handwriting recognition feature allows users to instantly convert written text, numbers, forms, and drawings into easily legible digital text without having to switch modes.



Dual Pens for Simultaneous Collaboration

EZWrite comes with dual pens that allow two users to write or draw simultaneously with different colors, making it ideal for multiple presenters.




# Floating Tool

EZWrite's built-in Floating Tool empowers employees to write on top of any app, video, website, document, or image. Whether using Windows, Mac, Chrome, or Android™, users can take notes on top of any on-screen content and save them for later use. Screen capture lets users capture all of the screen or just a part that they select with their fingers.

# Adjustable Screen Capture Regions and Easy Import

With EZWrite's Floating Tool, users can capture screen shots of anything on screen, regardless of the source, including content from apps, websites, and videos. They can then import this content into EZWrite for further discussion and annotation on a brand new page.



Step I - Press the Screen Shot button on the Floating Tool



Step 2 - Capture on-screen content directly on the IFP



Step 3 - Import to EZWrite and make annotations

# Capacitive Touch Technology Direct Bonded

BenQ's new DuoBoard's fine-tuned handwriting experience is enhanced by incorporating the advanced P-cap (Projected Capacitive) touch technology. The P-cap touch enables accurate, precise touch responses on the screen for realistic handwriting. To facilitate team collaboration, it also supports multi-touch capability. In addition, the high-quality glass layer offers great resistance to light, dust, and water, enhancing overall durability.



Reduces the gap between the touch point and the point displayed on screen.



Creates more natural handwriting with a new touch frame that recognizes a smaller radius.



Reduces the pre-touch distance to offer better touch and writing experiences

InstaShare Wireless Solution for Seamless Collaboration



4 Split Screens and the Central Control for a Smooth Meeting

InstaShare accommodates 4 attendee screens at once with synchronized discussions. To manage the meeting, InstaShare has a centrally-controlled system which regulates the attendees and mirrored content so that meetings can go on smoothly.



# Two-Way Mirroring

Intended to enhance collaboration in business meetings, InstaShare runs two-way mirroring between IFP and mobile devices without the need for video cables, no matter if you're in the room or remote, the IFP will always have control of itself.



# Two-Way Touch Control

InstaShare also supports two-way touch control, which means both IFP and client device can control or interact with what is being mirrored. Annotation is another key InstaShare provides when running Two-Way Touch Control.

# Foster a Powerful Collaborative Environment

BenQ's IFP ensures businesses can embrace innovation without compromising employee health thanks to smart features that monitor air quality, protect eye health, and reduce the transmission of germs.





# Air-Quality Sensor

Poor indoor air quality can decrease efficiency and reduce alertness. BenQ's Interactive Flat Panel incorporates an air-quality sensor that monitors CO2 levels and reminds users to adopt measures that can keep CO2 concentrations in check. This handy feature can boost employee focus and ensure that meetings are always efficient and impactful.

# Smart Eye-Care Solution

BenQ's Smart Eye-Care Solution uses the Interactive Flat Panel's motion sensor to automatically adjust display settings according to the user's distance from the screen. For a smooth and comfortable viewing experience, BenQ IFPs can automatically activate Flicker-Free and Low Blue Light features as necessary.








Flicker-Free

Anti-Glare

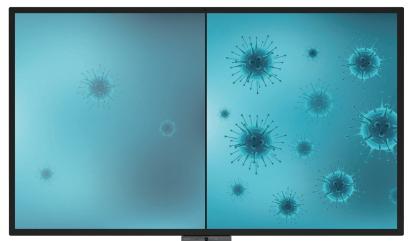

# Germ-Resistant Screen

The Germ-Resistant Screen is empowered by a multilayer coating of the non-toxic, enduring nano ionic silver agent that kills most germs accumulating on screen surfaces, promoting the health and well-being of users. The ionic silver's antimicrobial feature remains effective even after thorough cleaning or long periods of use.

with ionic silver coating

without ionic silver coating

### TUV Test Confirmed

TUV is the world's leading inspection and Verification Company, providing internationally approved testing services to verify product quality and performance. Placing our trust in TUV's best-in-class facilities and world-recognized integrity, we had their experts carefully evaluate the screen's antimicrobial efficacy. Proved by the JIS Z 2801:2010 testing methods, the result shows that BenQ's Germ-Resistant Screen can effectively restrain the growth of Escherichia coli, Staphylococcus aureus and Pseudomonas aeruginosa. To maintain antimicrobial efficacy, please frequently wipe your touch screen with a clean, soft, lint-free cloth moisturized with a neutral detergent.

# All-in-One Meeting Solutions



# Start Meetings Quickly with BenQ Launcher

DuoBoard makes it easy for users to launch meetings without delay. Created to aggregate all key tools in one hub, BenQ Launcher allows employees to access video input sources or use the EZWrite whiteboard without having to log into their accounts. Additionally, BenQ Launcher comes with a task switcher, letting users switch between recent apps and input signal sources with just a simple touch.



### Account Management System for Personalized Workspace

DuoBoard supports multi-account management through NFC technology, which allows users to directly access and manage their personal system-setting, network drive and cloud storage space, such as Google drive and Dropbox, by simply scanning NFC cards without having to enter password.



### Video Conferences Anytime, Anywhere

DuoBoard is compatible with the OPS (Optional Open Pluggable Specification) which offers the flexibility of supporting different videoconferencing solutions. With a one-click-to-start interface, you can easily host a high-quality audio visual group meeting by connecting various devices. The embedded camera and array mic enhance meeting efficiency, boosting productivity.

# Hassle-Free Display Management and Security

With cloud features, BenQ DMS (Device Management System) combined Device Info and Management, Apps Management and OTA (Over-the-Air) Update to provide you an ultimate device management solution for your productivity.



# Device Info and Management

Remotely control your displays with DMS Cloud via Internet. It's an effective way to lower TCO and energy consumption for your operation.

# Apps Management

Install Android<sup>™</sup> apps for a selection of displays through our cloud server. DMS Cloud is designed to save you the hassles of repetitive manual installation work.



# OTA (Over-the-Air) Update

Upgrade the latest BenQ firmware for your displays through our OTA Update support and keep them running smoothly at all times.

# More Features

# DMS Local

DMS Local is a Device Info and Management software based on windows OS. For users who would like to control your displays remotely via LAN, you can download DMS Local software for your operation.





# MDA (Multiple Display Administrator)

For users who would like to control your displays remotely via RS232, you can download MDA software for your operation.

# McAfee Embedded for Maximum Security

BenQ Interactive Flat Panels are embedded with McAfee for maximum security. McAfee offers device security with Real-time protection, Deep Scan, WebBrowsing Security, and Wi-Fi Security functions. To ensure data security, McAfee provides Privacy Check, APP Access Protection, and Hidden APPs features.


in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS RJ45 x1, OPS Slot x1Built-in CameraFHD Camera x1FHD Camera x1Built-in MicrophoneArray Microphone x6Array Microphone x6Built-in speakerSpeaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorVoltageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)210W350WMechanicalVWeight (Without / With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)Mall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2x2On-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / Carek/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Traditio	el	CP6501K	CP8601K
Backlight / Lightsource         DLED         DLED           Resolution (Pisea)         UHD 340 x 2160 pixels         UHD 340 x 2160 pixels           Brightness (Typical)         320nits         350nits           Scoterast Ratio (Typical)         5000:1         1.200:1           View Argie (Horizontal /Vertical)         178*/178*         178*/178*           Response Time (ms)         65%         65%           Color Gamut (PK NTSC)         66%         66%           Light Life (Typical)         30.000 hours         30.000 hours           Dicko Portenation         Landscape / Portrait         Landscape           Tempered Glass         3mm Tempered Glass         3mm Tempered Glass           And-Glare & Germ-Resistant Screen         Touch fachnology         P-CAP           Touch fachnology         P-CAP         P-CAP           Numbers of Touch / Resolution         Up to 20 points Multi-touch         Up to 20 points Multi-touch           Touch interface         USB Touch Port x2         USB B Touch Port x2           Connector         VGA x1, HDM1 20 x3, HDM1 Out x1, 3mm Audio Line         vi/X x1, ADM2 X3, HDM1 Out x1, 3Smm Audio Line           Buil-in Microphone A         Array Microphone x6         Array Microphone x6           Buil-in Microphone A         Array Microphone x6         A			
Resolution (Pheil)         UHD 3840 x 2160 pixels         UHD 3840 x 2160 pixels           Brighness (Typical)         320nis         330nis           Contrast Ratio (Typical)         5.000:1         1.200:1           View Angle (Horizonal / Vertual)         178'/178'         178'/178'           Response Time (ms)         8ms         8ms           Color Gamut (x% NTSC)         64%         64%           Ugit Life (Typical)         30,000 hours         30,000 hours           Display Orientation         Landscape / Portrait         Landscape           Construments         30m Tempered Glass         3mm Tempered Glass           Anto-Glare & Germ-Resistant Screen         AG75         AG75           Touch Technology         P-CAP         P-CAP           Numbers of Touch / Resolution         Ug to 20 points Multi-touch         Ug to 20 points Multi-touch           Ugs 20 of Statis         X35m Audio Line out xi, 35mm Audio Line         infMic in xi, 3.3mm Audio Line out xi, 35PDF Audio out xi, 3.5mm Audio Line           Connector         VGA xi, HDM1 20 xi, HDM1 Out xi, 3.5mm Audio Line         VGA xi, HDM1 20 xi, HDM1 Audio Line out xi, 200FF Audio aux xi, 200 Avi USB 30 xi, USB B Touch Port xi, 2.632           Built-In Incorphene         Array Microphone xi         Array Microphone xi A           Built-In Microphone         Array Microph	en Size	65"	86"
Brightness (Typical)     320nits     350nits       Contrast Ratic (Typical)     5000:1     1.200:1       View Angle (Hortzontal / Versical)     178"/178"     178"/178"       Reponse Time (ms)     Bms     Bms       Color Gamut (x% NTSC)     68%     68%       Light Lift (Typical)     30,000 hours     30,000 hours       Display Orientation     Landscape / Portrait     Landscape       Class     3mm Tempered Glass     3mm Tempered Glass       And-Glare & Germ-Resistant Screen     AG75       Touch     Touch Technology     P.CAP       Numbers of Touch / Resolution     Up to 20 points Multi-touch       Touch Interface     USB B Touch Port x2       Connector     VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line     VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line       Touch Interface     USB B Touch Port x2     USB B Touch Port x2       Connector     VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line     VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line       Bullcin Camera     HPD Camera x1     HPD Camera x1       Bullcin Camera     HPC Camera x1     RH5 S.L. (OPS Stot x1       Bullcin Gamera     Speaker 10W x2 & Subwoofer 16W x1 (Hiff 2.1)     Speaker 10W x2 & Subwoofer 16W x1 (Hiff 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (Hiff 2.1)     Speaker 10W x2 & Subwoofer 16W x1 (Hiff 2.1) <t< td=""><td>light / Lightsource</td><td>DLED</td><td>DLED</td></t<>	light / Lightsource	DLED	DLED
Contrast Rain (Typical)       5,000:1       1,200:1         View Angle (Horizontal /Vertical)       178'/178''       178'/178''         Response Time (ms)       8mis       6mis         Color Gamut (KNTSC)       68%       68%         Light Life (Typical)       30,000 hours       30,000 hours         Display Orientation       Landscape / Portrait       Landscape         Gass       Tempered Glass       3mm Tempered Glass       3mm Tempered Glass         Anti-Glare & Germ-Resistant Screen       AG75       AG75         Touch Technology       P-CAP       P-CAP         Numbers of Touch / Resolution       Up to 20 points Multi-touch       Up to 20 points Multi-touch         Touch Technology       P-CAP       P-CAP         Numbers of Touch / Resolution       Up to 20 points Multi-touch       Up to 20 points Multi-touch         Connector       VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line       in/Mic in x1, 3.5mm Audio Line out x1, SDIF Audio out x1, USB 20 x4, USB 30 x3, USB B Touch Port x2, RS         Right x1, OPS Siot x1       Right x1, OPS Siot x1       Right x1, OPS Siot x1         Built-in Camera       FHD Camera x1       FHD Camera x1         Built-in Streaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Sensor <td>lution (Pixel)</td> <td>UHD 3840 x 2160 pixels</td> <td>UHD 3840 x 2160 pixels</td>	lution (Pixel)	UHD 3840 x 2160 pixels	UHD 3840 x 2160 pixels
Were Angle (Horizontal /Vertical)     178°/178°     178°/178°       Response Time (ms)     Bms     Bms       Color Gamut (x5, NTSC)     68%     68%       Light Life (Typical)     30.000 hours     30.000 hours       Display Orientation     Landscape / Portrait     Landscape       Glas     Tempered Glass     Amr       And-Glare & Germ-Resistant Screen     AG75     AG75       Touch     Tempered Glass     AG75     AG75       Numbers of Touch / Resolution     Up to 20 points Multi-touch     Up to 20 points Multi-touch       Touch interface     USB B Touch Port x2     USB B Touch Port x2       Connector     VGA x1, HDM1 20 x3, HDM1 Out x1, 3.5mm Audio Line     tri/Mic in x1, 3.5mm Audio Line       Numbers of Touch     USB 20 x4, USB 30 x3, USB B Touch Port x2, RS232 x1,     USB 20 x4, USB 30 x3, USB B Touch Port x2, RS232 x1,       Built-in Camera     HDC Camera x1     HDC Camera x1       Built-in Stapekar     Speaker 10W x2 & Subwoofer 16W x1 (HiF1 2.1)     Speaker 10W x2 & Subwoofer 16W x1 (HiF1 2.1)       Sensor     NFC Sensor x1, Motion Sensor x1, Air Quality Sensor     NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       Yolage     AC 100-240V - S0/60Hz     AC 100-240V - S0/60Hz     SioW       Yolage     AC 100-240V - S0/60Hz     X2     X2       Yolage     AC 100-240V - S0/60Hz     <	tness (Typical)	320nits	350nits
Response Time (ms)     Bms     Bms       Color Gamut (x% NTSC)     68%     68%       Light Life (Typicial)     30,000 hours     30,000 hours       Display Orientation     Landscape / Portrait     Landscape       Glass     3mm Tempered Glass     3mm Tempered Glass     Amd Glars       And-Glare & Germ-Resistant Screen     AG75     AG75       Touch     Touch Technology     P-CAP     P-CAP       Numbers of Touch / Resolution     Up to 20 points Multi-touch     Up to 20 points Multi-touch       USB B Touch Port x2     USB B Touch Port x2     USB B Touch Port x2       Connector     VGA x1, HDM12.0 x3, HDM1 Out x1, 3.5mm Audio Line     in/Mit in x1, 3.5mm Audio Line out x1, SPD1F Audio out x1,       Connector     VGA x1, HDM12.0 x3, HDM1 Out x1, 3.5mm Audio Line     VGA x1, HDM1 2.0 x3, USB B Touch Port x2, RS22 x1,       Built-in Camera     FHD Camera x1     FHD Camera x1       Built-in Mitrophone     Array Mitorophone x6     Array Mitorophone x6       Built-in Speaker     Speaker IOW x2 & Subwoofer 16W x1 (HiFi 21)     Speaker IOW x2 & Subwoofer 16W x1 (HiFi 21)       Sensor     NFC Sensor x1, Motion Sensor x1, Air Quality Sensor X1, Motion S	rast Raito (Typical)	5,000:1	1,200:1
Color Gamut (x% NTSC)       68%       66%         Light Life (Typical)       30.000 hours       30.000 hours         Display Orientation       Landscape / Portrait       Landscape         Glass       3mm Tempered Glass       3mm Tempered Glass         Tempered Glass       AG75       AG75         Touch       AG75       AG75         Touch Technology       PCAP       PCAP         Wimbers of Touch / Resolution       Up to 20 points Multi-touch       Up to 20 points Multi-touch         USB B Touch Port x2       USB B Touch Port x2       USB B Touch Port x2         Connectority & Sensor       VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1       RJ45 x1, OPS Slot x1         Built-in Camera       FHD Camera x1       RJ45 x1, OPS Slot x1       RJ45 x1, OPS Slot x1         Built-in Stream       Speaker 10W x2 & Subwoofer 16W x1 (HiF1 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiF1 2.1)         Sensor       XI, Ept Sensor x1, IR sensor x1, Air Quality Sensor x1, IR sensor x1, R sensor x1, R sensor x1, R sensor x1, R consor x1, IR sensor X1,	Angle (Horizontal / Vertical)	178°/178°	178°/178°
Light Life (Typical)       30.000 hours       30.000 hours         Display Orientation       Landscape / Portrait       Landscape         Glass       3mm Tempered Glass       3mm Tempered Glass         Anti-Glare & Germ-Resistant Screen       AG75       AG75         Touch       Touch Technology       P-CAP       P-CAP         Numbers of Touch / Resolution       Up to 20 points Multi-touch       Up to 20 points Multi-touch       Up to 20 points Multi-touch         Touch interface       USB B Touch Port x2       USB B Touch Port x2       USB B Touch Port x2         Connector       VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line       VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line vit x1, SPDIF Audio out x1, uSB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 2.0 x4, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 2.0 x4, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, U	onse Time (ms)	8ms	8ms
Display Orientation       Landscape / Portrait       Landscape         Glass       3mm Tempered Glass       3mm Tempered Glass         Anti-Glare & Germ-Resistant Screen       AG75         Touch       Touch Technology       P-CAP         Touch Technology       P-CAP       P-CAP         Numbers of Touch / Resolution       Up to 20 points Multi-touch       Up to 20 points Multi-touch         Touch interface       USB B Touch Port x2       USB B Touch Port x2         Connectivity & Sensor       VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB 2.0 x4, USB 3.0 x4, USB 3.0 x3, USB 2.0 x4, USB 3.0 x4, USB 3.0 x3, USB 2.	r Gamut (x% NTSC)	68%	68%
Glass         Jmm Tempered Glass         Jmm Tempered Glass         Jmm Tempered Glass           Anti-Glare & Germ-Resistant Screen         AG75         AG75           Touch         Touch Resolution         Variable           Touch Technology         P-CAP         P-CAP           Numbers of Touch / Resolution         Up to 20 points Multi-touch         Up to 20 points Multi-touch           Touch interface         USB B Touch Port x2         USB B Touch Port x2           Connectivity & Sensor         VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, uSB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, VIC Sensor x1, Motion Sensor x1, Air Quality Sension x1, Motion Sensor x1, Air Quality Sensor x1, Motion Sensor x	Life (Typical)	30,000 hours	30,000 hours
Tempered Glass3mm Tempered Glass3mm Tempered GlassAnti-Glare & Germ-Resistant ScreenAG75AG75TouchTurnerFCAPP-CAPTouch TechnologyP-CAPP-CAPNumbers of Touch / ResolutionUp to 20 points Multi-touchUp to 20 points Multi-touchTouch interfaceUSB B Touch Port x2USB B Touch Port x2Contectivity & SensorTurnerVGA x1, HDM1 20 x3, HDM1 Out x1, 3,5mm Audio LineConnectorVGA x1, HDM1 20 x3, HDM1 Out x1, 3,5mm Audio Line out x1, SPD1 FAudio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Bit-in Camera x1VGA x1, HDM1 20 x3, HDM1 Out x1, 8,5mm Audio LineBuilt-in CameraFHD Camera x1FHD Camera x1Built-in GameraFHD Camera x1FHD Camera x1Built-in SpeakerSpeacer 10W x2 & Subwoofer 16W x1 (Hifi Z1)Speaker 10W x2 & Subwoofer 16W x1 (Hifi Z1)SensorX1, Light Sensor x1, Miction Sensor x1, Air Quality Sensor x1, Micton	•	Landscape / Portrait	Landscape
Art-Glare & Germ-Resistant Screen       AG75         Touch       Touch         Touch Technology       P-CAP         Numbers of Touch / Resolution       Up to 20 points Multi-touch         Touch interface       USB B Touch Port x2         Connectivity & Sensor       Connectivity & Sensor         Connector       VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Built-in Camera       VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS         Built-in Camera       FHD Camera x1       FHD Camera x1         Built-in speaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       NFC Sensor x1, Air Quality Sensor         vltage       AC 100-240V- 50/60Hz       AC 100-240V- 50/60Hz       X1, Light Sensor x1, IR sensor x1         Ypical (Wattr)       210W       350W       350W         Methanical       992. Ibs (45kg) / 125.7 Ibs (57kg ± 15Kg)       155 Ibs (70.6kg) / 205.5 Ibs (90.4kg ± 15Kg)         Mandle<			
Touch         P-CAP         P-CAP           Numbers of Touch / Resolution         Up to 20 points Multi-touch         Up to 20 points Multi-touch           Touch Interface         UB B Touch Port x2         UB B Touch Port x2           Connector         VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line         VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line out x1, SPD1F Audio out x1, in/Mic in x1, 3.5mm Audio Line out x1, SPD1F Audio audio x1, in/SPD1F Audio X2, Audio X2, SUB2F Audio X2, Audio X2, Audio X2		·	•
Touch TechnologyP-CAPP-CAPNumbers of Touch / ResolutionUp to 20 points Multi-touchUp to 20 points Multi-touchTouch interfaceUSB B Touch Port x2USB B Touch Port x2Connectivity & SensorVGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio LineVGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,inflic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS32 x1,USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS32 x1,Built-in CameraFHD Camera x1FHD Camera x1Built-in MicrophoneArray Microphone x6Array Microphone x6Array Microphone x6Ner Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, IR sensor x1, IR sensor x1PolotageAC 100-240V- 50/60HzAC 100-240V- 50/60HzAC 100-240V- 50/60HzAC 100-240V- 50/60HzAC 100-240V- 50/60HzAC 100-240V- 50/60HzAC 100-240V- 50/60Hz150 NG 1.052, X 877, X 85, Zmm)TO Set to the set of the set		AG75	AG75
Om         Om         Up to 20 points Multi-touch         Up to 20 points Multi-touch           Touch interface         USB B Touch Port x2         USB B Touch Port x2           Connector         VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line         VGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio Line           In/Hic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,         in/Hic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,         USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,         USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,           Built-in Camera         FHD Camera x1         FHD Camera x1         FHD Camera x1           Built-in Speaker         Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)           Sensor         NFC Sensor x1, Motion Sensor x1, Air Quality Sensor         NFC Sensor x1, Air Quality Sensor x1, Air Quality Sensor x1, Resnor x1           Rower         Voltage         AC 100-240V~ 50/60Hz         AC 100-240V~ 50/60Hz           Vigit (Witchout / Witch Packing)         99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)         155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)           Dimension (WXHxD)         59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)         77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)           Wall Mounting (VESA) (mm)         4 holes (600 x 400mm) Scree MB x25mm         4 holes (800 x 600mm) Scree MB x25mm           Handle         x2         x2<			
Touch interface       USB B Touch Port x2       USB B Touch Port x2         Connector       VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line       VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,         Connector       VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,       in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,         USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,       USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,       USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS         Built-in Camera       FHD Camera x1       FHD Camera x1       FHD Camera x1         Built-in Microphone       Array Microphone x6       Array Microphone x6         Built-in Speaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoore x1, Air Quality Sensor         NFC Sensor x1, Rotion Sensor x1, Air Quality Sensor       NFC Sensor x1, Air Quality Sensor x1, Light Sensor x1, Air Quality Sensor x1, Light Sensor x1, IR sensor x1       Y1, Light Sensor x1         Ypical (Watt)       210W       350W       Methanicat         Weight (Without / With Packing)       99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)       155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)         Dimension (WxHxD)       59.1 x 34.5 x 335in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x			
Connectivity & Sensor         VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line         VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line           Connector         VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Built-in Camera         VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Built-in Camera         USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Built-in Camera         USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, Built-in Microphone         HD Camera x1         HD Camera x1           Built-in Speaker         Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)           Sensor         NFC Sensor x1, Motion Sensor x1, Air Quality Sensor         NFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, IR sensor x1         x1, Light Sensor x1, Resensor x1           Yoltage         AC 100-240V~ 50/60Hz         AC 100-240V~ 50/60Hz         YOltage           Yweight (Without / With Packing)         99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)         155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)           Dimension (WxHxD)         59.1 x 34.5 x 3.35in (1502.7 x 87.78 x 85.2mm)         77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)           Handle         x2         x2         CoD         X2           On-Screen			· ·
ConnectorVGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm Audio LineVGA x1, HDM1 2.0 x3, HDM1 Out x1, 3.5mm AudioConnectorin/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,in/Mic in x1, 3.5mm Audio Line out x1, SPDIF AudioUSB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RSBuilt-in CameraFHD Camera x1Built-in MicrophoneArray Microphone x6Built-in SpeakerSpeaker 10W x2 & Subwoofer 16W x1 (HiF 2.1)SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Resnor x1VoltageAC 100-240V~ 50/60HzYoltageAC 100-240V~ 50/60HzYoltageY2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)Dimension (WxHxD)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)Weight (Without / With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35in (150.27 x 877.8 x 85.2mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mmHandlex2X2X2On-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / CachI Danish / Swedish / Italian / Romanian / Finnish / Norwegian/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian		USB B Touch Port x2	USB B Touch Port x2
in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1, USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1In/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1In/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1In/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1, RJ45 x1, OPS Slot x1RIFC Slot x1RIFC Slot x1RIFC Slot x1Built-in MicrophoneArray Microphone x6Array Microphone x6Array Microphone x6Built-in speakerSpeaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, IR sensor x1Rowerx1, Light Sensor x1, IR sensor x1x1, Light Sensor x1, IR sensor x1VolrageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)10W30WMechanicaly2y2 los (45kg) / 125.7 lbs (57kg ± 1.5Kg)Weight (Without/With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)Mandley2x2Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw MB x25mmHandley2y2CSDCSDOn-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / Caenia / Jeanish / Portuguese / Traditional / Greek / Hungarian / Spanish	nectivity & Sensor		
USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, R5232 x1, RJ45 x1, OPS Slot x1USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, R5 RJ45 x1, OPS Slot x1Built-in CameraFHD Camera x1FHD Camera x1Built-in MicrophoneArray Microphone x6Array Microphone x6Built-in speakerSpeaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)SensorNFC Sensor x1, Motion Sensor x1, Air Quality SensorNFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, Resnor x1PowerV210WSolWVoltageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)92.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)92.1 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Madhedx2x2CSDConx2On-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russin / CzechEnglish / French / German / Dutch / Polish / Norvegian/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korea / Turkey / Indonesia (27L)Persian / Vietnamese / Korea / Turkey / Indonesia (27L)			VGA x1, HDMI 2.0 x3, HDMI Out x1, 3.5mm Audio Line
Number of the second	i	in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,	in/Mic in x1, 3.5mm Audio Line out x1, SPDIF Audio out x1,
Built-in Camera       FHD Camera x1       FHD Camera x1         Built-in Year       Array Microphone x6       Array Microphone x6         Built-in speaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, R sensor x1         Power       x1,Light Sensor x1, IR sensor x1       x1,Light Sensor x1, IR sensor x1         Voltage       AC 100-240V~ 50/60Hz       AC 100-240V~ 50/60Hz         Typical (Watt)       210W       350W         Mechanical       99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)       155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)         Dimension (WxHxD)       59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Handle       x2       x2       20         OSD	l	USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,	USB 2.0 x4, USB 3.0 x3, USB B Touch Port x2, RS232 x1,
Built-in Microphone       Array Microphone x6       Array Microphone x6         Built-in Speaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor x1, Light Sensor x1, IR sensor x1         Power       x1,Light Sensor x1, IR sensor x1       x1,Light Sensor x1, IR sensor x1         Voltage       AC 100-240V~ 50/60Hz       AC 100-240V~ 50/60Hz         Typical (Watt)       210W       350W         Mechanical       99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)       155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)         Dimension (WxHxD)       59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Mandle       x2       x2       COSD         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         Persian / Vietnamese / Korea / Turkey / Indonesia (27L)       Persian / Vietnamese / Korea / Turkey / Indonesia       Persian / Vi		RJ45 x1, OPS Slot x1	RJ45 x1, OPS Slot x1
Built-in speaker       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)       Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)         Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor         x1, Light Sensor x1, IR sensor x1       x1, Light Sensor x1, IR sensor x1       x1, Light Sensor x1, IR sensor x1         Power       AC 100-240V~ 50/60Hz       AC 100-240V~ 50/60Hz       Townoor 2000         Ypical (Watt)       210W       350W         Mechanical       99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)       155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)         Dimension (WxHxD)       59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Handle       x2       x2       2         OSD	in Camera	FHD Camera ×I	FHD Camera ×I
Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor       NFC Sensor x1, Motion Sensor x1, Air Quality Sensor         Power       x1,Light Sensor x1, IR sensor x1       x1,Light Sensor x1, IR sensor x1         Voltage       AC 100-240V~ 50/60Hz       AC 100-240V~ 50/60Hz         Typical (Watt)       210W       350W         Mechanical           Weight (Without /With Packing)       99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)       155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)         Dimension (WxHxD)       59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Handle       x2       x2         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish / Norwegian         / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional         / Bresian /Vietnamese / Korea / Turkey / Indonesia (27L)       Persian /Vietnamese / Korea / Turkey / Indonesia	in Microphone	Array Microphone x6	Array Microphone x6
x1,Light Sensor x1, IR sensor x1x1,Light Sensor x1, IR sensor x1PowerVoltageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)210W350WMechanicalWeight (Without / With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35 in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35 in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2On-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / CzechEnglish / French / German / Dutch / Polish / Russian / CzechOn-Screen Display LanguagesCinglish / French / German / Dutch / Polish / Portuguese / Traditional/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Simplified Chinese / Arabic / Japanese / Persian / Vietnamese / Korea / Turkey / Indonesia (27L)Persian / Vietnamese / Korea / Turkey / Indonesia	in speaker	Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)	Speaker 10W x2 & Subwoofer 16W x1 (HiFi 2.1)
PowerVoltageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)210W350WMechanicalWeight (Without / With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2On-Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / CzechEnglish / French / German / Dutch / Polish / Russian / CzechOn-Screen Display LanguagesEnglish / Swedish / Italian / Romanian / Finnish / Norwegian/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Simplified Chinese / Arabic / Japanese / Thai /Chinese / Simplified Chinese / Arabic / Japanese / Thai /Persian /Vietnamese / Korea / Turkey / Indonesia (27L)Persian /Vietnamese / Korea / Turkey / Indonesia	or I	NFC Sensor x1, Motion Sensor x1, Air Quality Sensor	NFC Sensor x1, Motion Sensor x1, Air Quality Sensor
VoltageAC 100-240V~ 50/60HzAC 100-240V~ 50/60HzTypical (Watt)210W350WMechanicalWeight (Without / With Packing)9.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35 in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35 in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2OSD	>	x1,Light Sensor x1, IR sensor x1	x1,Light Sensor x1, IR sensor x1
Typical (Watt)210W350WMechanicalWeight (Without / With Packing) Dimension (WxHxD)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2OspSecond Screen Display LanguagesEnglish / French / German / Dutch / Polish / Russian / CzechEnglish / French / German / Dutch / Polish / Russian / CzechEnglish / French / German / Dutch / Polish / Russian / Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Hungarian / Spanish / Portuguese / Traditional/ Greek / Simplified Chinese / Korea / Turkey / Indonesia (27L)Persian /Vietnamese / Korea / Turkey / IndonesiaPersian /Vietnamese / Korea / Turkey / Indonesia	er		
MechanicalWeight (Without / With Packing)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Dimension (WxHxD)59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2OSD	<u> </u>	AC 100-240V~ 50/60Hz	AC 100-240V~ 50/60Hz
Weight (Without / With Packing) Dimension (WxHxD)99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)Wall Mounting (VESA) (mm)59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)Wall Mounting (VESA) (mm)4 holes (600 x 400mm) Screw M8 x25mm4 holes (800 x 600mm) Screw M8 x25mmHandlex2x2OSD		210W	350W
Dimension (WxHxD)       59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)       77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)         Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Handle       x2       x2         OSD       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         Osek / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish / Norwegian         Chinese / Simplified Chinese / Arabic / Japanese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional         Persian / Vietnamese / Korea / Turkey / Indonesia (27L)       Persian / Vietnamese / Korea / Turkey / Indonesia			
Wall Mounting (VESA) (mm)       4 holes (600 x 400mm) Screw M8 x25mm       4 holes (800 x 600mm) Screw M8 x25mm         Handle       x2       x2         OSD       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish /         / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Chinese / Simplified Chinese / Arabic / Japanese /         Persian / Vietnamese / Korea / Turkey / Indonesia (27L)       Persian / Vietnamese / Korea / Turkey / Indonesia       Persian / Vietnamese / Korea / Turkey / Indonesia	ht (Without / With Packing)	99.2 lbs (45kg) / 125.7 lbs (57kg ± 1.5Kg)	155 lbs (70.6kg) / 205.5 lbs (90.4kg ± 1.5Kg)
Handle       x2       x2         OSD       Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Caech         On-Screen Display Languages       English / French / German / Dutch / Polish / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish /         One-Screen Display Languages       English / French / German / Dutch / Polish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional         One-Screen Display Languages       Simplified Chinese / Arabic / Japanese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional         Ohinese / Simplified Chinese / Korea / Turkey / Indonesia (27L)       Persian / Vietnamese / Korea / Turkey / Indonesia		59.1 x 34.5 x 3.35in (1502.7 x 877.8 x 85.2mm)	77.2 x 44.7 x 3.35in (1962 x 1136 x 85mm)
OSD On-Screen Display Languages English / French / German / Dutch / Polish / Russian / Czech / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Greek / Hungarian / Spanish / Portuguese / Traditional Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korea / Turkey / Indonesia (27L) Persian / Vietnamese / Korea / Turkey / Indonesia	Mounting (VESA) (mm)	4 holes (600 x 400mm) Screw M8 x25mm	4 holes (800 x 600mm) Screw M8 x25mm
On-Screen Display Languages       English / French / German / Dutch / Polish / Russian / Czech       English / French / German / Dutch / Polish / Russian / Czech         / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish / Norwegian       / Danish / Swedish / Italian / Romanian / Finnish /         / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional       / Greek / Hungarian / Spanish / Portuguese / Traditional         Chinese / Simplified Chinese / Arabic / Japanese / Thai /       Persian / Vietnamese / Korea / Turkey / Indonesia (27L)       Persian / Vietnamese / Korea / Turkey / Indonesia		x2	x2
/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian / Danish / Swedish / Italian / Romanian / Finnish / / Greek / Hungarian / Spanish / Portuguese / Traditional / Greek / Hungarian / Spanish / Portuguese / Trad Chinese / Simplified Chinese / Arabic / Japanese / Thai / Chinese / Simplified Chinese / Arabic / Japanese / Persian / Vietnamese / Korea / Turkey / Indonesia (27L) Persian / Vietnamese / Korea / Turkey / Indonesia			
<ul> <li>/ Greek / Hungarian / Spanish / Portuguese / Traditional</li> <li>/ Greek / Hungarian / Spanish / Portuguese / Trad</li> <li>Chinese / Simplified Chinese / Arabic / Japanese / Thai /</li> <li>Chinese / Simplified Chinese / Korea / Turkey / Indonesia (27L)</li> <li>Persian / Vietnamese / Korea / Turkey / Indonesia</li> </ul>	On-Screen Display Languages	5	°
Chinese / Simplified Chinese / Arabic / Japanese / Thai / Chinese / Simplified Chinese / Arabic / Japanese / Thai / Persian / Vietnamese / Korea / Turkey / Indonesia (27L) Persian / Vietnamese / Korea / Turkey / Indonesia			/ Danish / Swedish / Italian / Romanian / Finnish / Norwegian
Persian / Vietnamese / Korea / Turkey / Indonesia (27L) Persian / Vietnamese / Korea / Turkey / Indonesia			/ Greek / Hungarian / Spanish / Portuguese / Traditional
	(	Chinese / Simplified Chinese / Arabic / Japanese / Thai /	Chinese / Simplified Chinese / Arabic / Japanese / Thai /
		Persian / Vietnamese / Korea / Turkey / Indonesia (27L)	Persian / Vietnamese / Korea / Turkey / Indonesia (27L)
	age / Accessory		
Remote Controller     x1 (with 2.4G dongle & Battery)     x1 (with 2.4G dongle & Battery)			
Power Cord         By Region           By Region         By Region			
		VGA(5m) x1, HDMI(1.5m) x1, USB for touch (3m) x1	VGA(5m) x1, HDMI(1.5m) x1, USB for touch (3m) x1
Quick Start Guide     x1     x1			
User's Manual Electronic File xI xI			
Touch Pen x2 x2	n Pen	x2	x2
Wall Mount xI xI		xl	xl
Optional Optional Accessory InstaShow, WiFi Dongle, OPS, Trolley InstaShow, WiFi Dongle, OPS, Trolley			

Optional Accessory

InstaShow, WiFi Dongle, OPS, Trolley


InstaShow, WiFi Dongle, OPS, Trolley

# Dimension (in)/(mm)

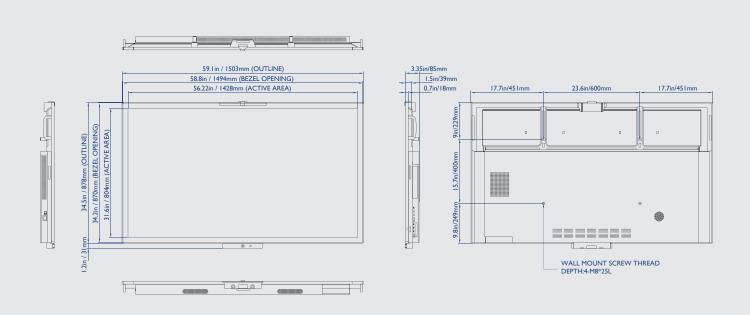

CP6501K

CP8601K

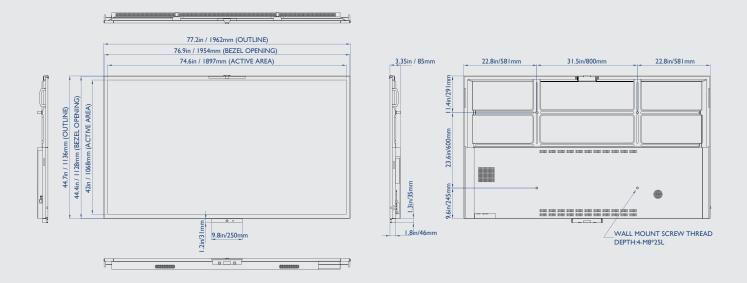

AUDIO AUDIO IN Input/output terminals USB 2.0 LAN OUT RS232 SPDIF /MIC IN VGA  $\bigcirc$  $\odot$  $\bigcirc$ USB 3.0 USB 2.0 HDMI OUT USB 3.0 USB 3.0 TOUCH I HDMI IN I HDMI IN2 HDMI IN 3 TOUCH 2 Power USB 2.0 /1.5A  $\bigcirc$  $\square$ (0 0] WI-FI CARD SLOT



# Benq

North America BenQ America Corp. 3200 Park Center Drive, Suite 150 Costa Mesa, CA 92626 U.S.A Tel : +1-714-559-4900 Fax : +1-714-557-0200 Dealer's Stamp

© 2020 BenQ Corp. Specification may vary by reigon, please visit your local stores for details. Actual product's features and specifications are subject to change without notice. This material may include corporate names and trademarks of third parties which are the properties of the third partiesrespectively. Updated 5/5/2020