


- 1. **Steel Purlin:** Panel shown over open purlin
- 2. **Clip:** Concealed fastening system

<b>Finished Coverage</b>	16", 18", 24"
<b>Panel Gauges</b>	22, 24
<b>Fastener Options</b>	Concealed
<b>Panel Length</b>	3' to 100'
<b>Rib Height</b>	3"
<b>Roof Slope</b>	Minimum 1/4":12 with Mastic

Uses the highest quality **50K** tensile strength steel. ASTM E-1680 Air Filtration, ASTM E-2140 Hydrostatic Water Immersion, ASTM 1886-03.

Choose from **24 colors in 22 Gauge**, plus **39 colors in 24 Gauge**. See our color charts for options. Can be installed over an open purlin system, metal decking, or solid substrate. A minimum of **1/4":12** pitch is recommended in most applications. Use bead mastic on overlap if used for roofing application.

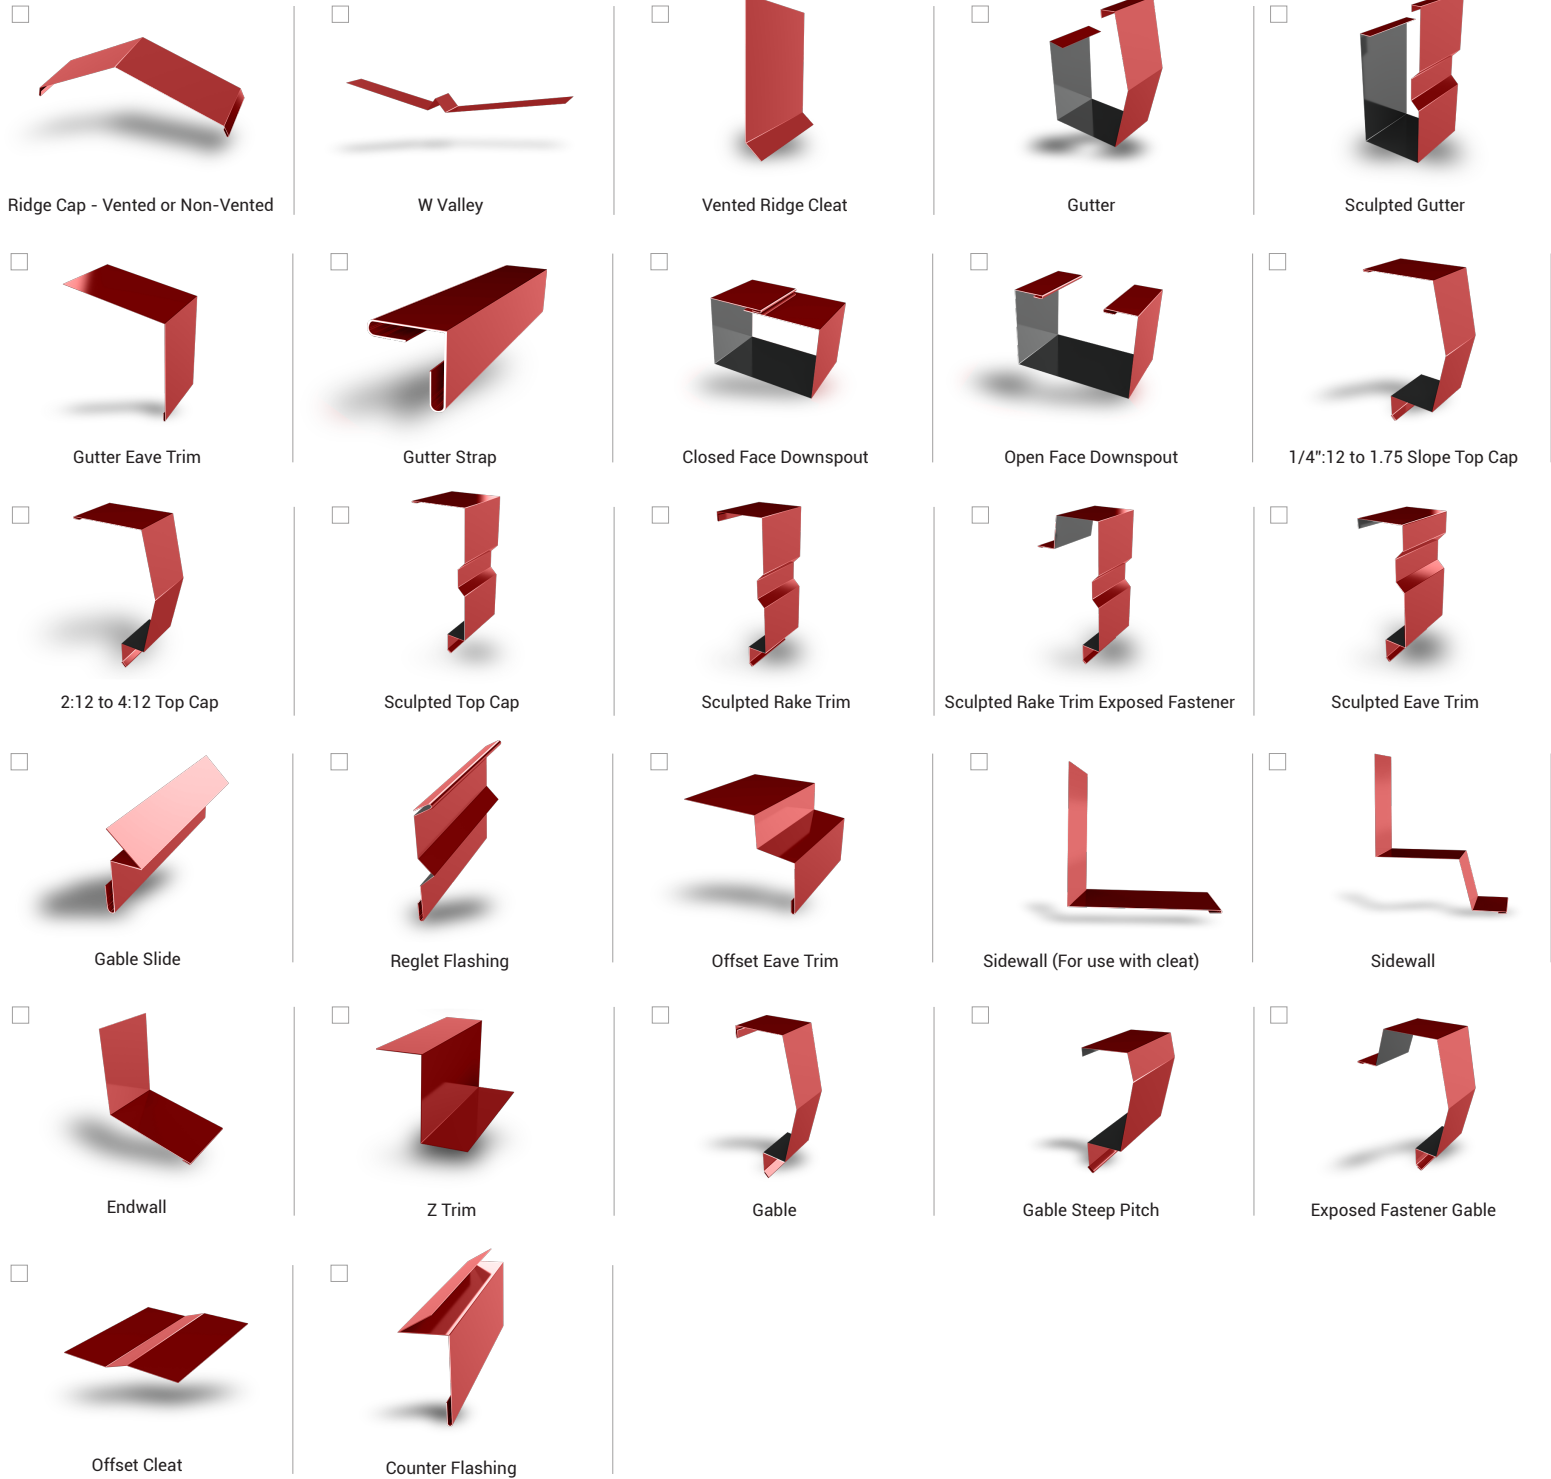

## 30 YEAR WARRANTY

22, 24 Gauge Thickness of Base Steel  
G90 Galvanized Substrate  
Polyvinylidene Paint System

## 25 YEAR WARRANTY

24 Gauge Thickness of Base Steel  
G90 Galvanized Substrate  
Polyvinylidene Paint System

Top Coat - PVDF Finish

Top Primer - PVDF Primer

Substrate - Galvanized Coating

Base Steel - Core Material

Substrate - Galvanized Coating

Primer - Exposed Interior Finish

## PANEL LAYERS

Every Bridger Steel panel uses multiple layers of protection to help prevent damage and create lasting beauty

24 Gauge Paint Panel Layers Shown in Example.