





# 6025 FENCING PANEL

Designed for livestock windbreaks, Bridger Steel has designed the 6025 fencing panel in a durable 22 gauge steel. This U.S. mill-direct steel works hard to help ranchers protect their cattle, minimize livestock illness, and even lower feed costs during the harsh winter months. The 6025 panel can be used in a vertical or horizontal application.

# 6025 FENCING PANEL

The 6025 Livestock Windbreak panel allows for multiple mounting options and can be deployed in static or portable variations. The 6025 panel comes in 24.5 or 16.5 ft. lengths. Each panel has a 36" coverage width. Bridger Steel recommends 20-30% spacing between panels to allow for airflow and prevent issues with low pressure behind the windbreak that reduces it's effectiveness. Based on recent studies, using this gap percentage allows for maximum coverage area for your windbreak.

Our 22 gauge 6025 fencing panel was designed as a structural panel, making it incredibly durable and dependable. To maximize the effects of your windbreak, contact a team member for design and installation advice. For portable options, we can also recommend platforms that work best for mounting a portable windbreak.

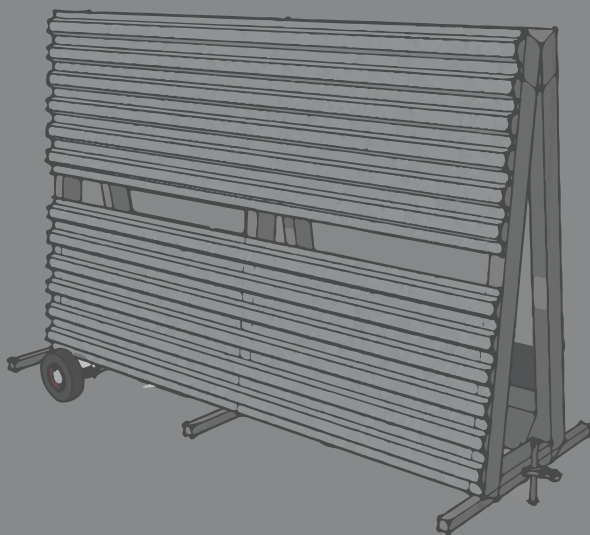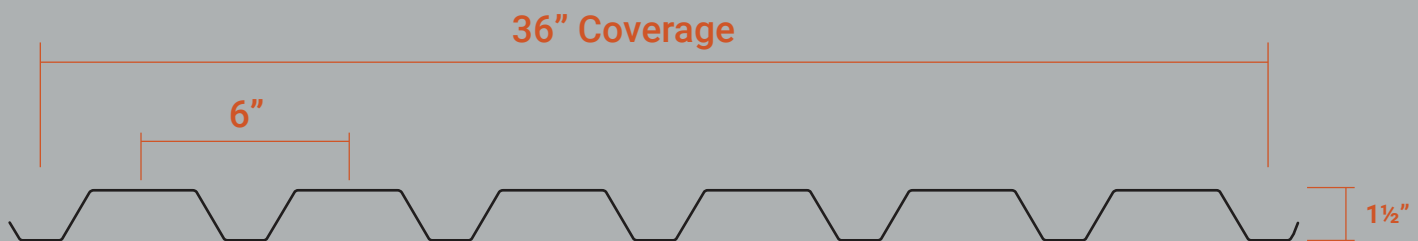

## PORTABLE APPLICATIONS

Portable windbreaks create the flexibility to adjust the location during the winter months, and allow ranchers to accurately adjust their locations based on upcoming weather patterns. A portable windbreak also allows ranchers the ability to alternate locations and allow for soil regeneration.

There are a number of options for deploying portable windbreaks, but a key factor should be to always consider the base width of your fencing, allowing for a stable platform. We recommend a 3' to 4' ratio of base to height.