

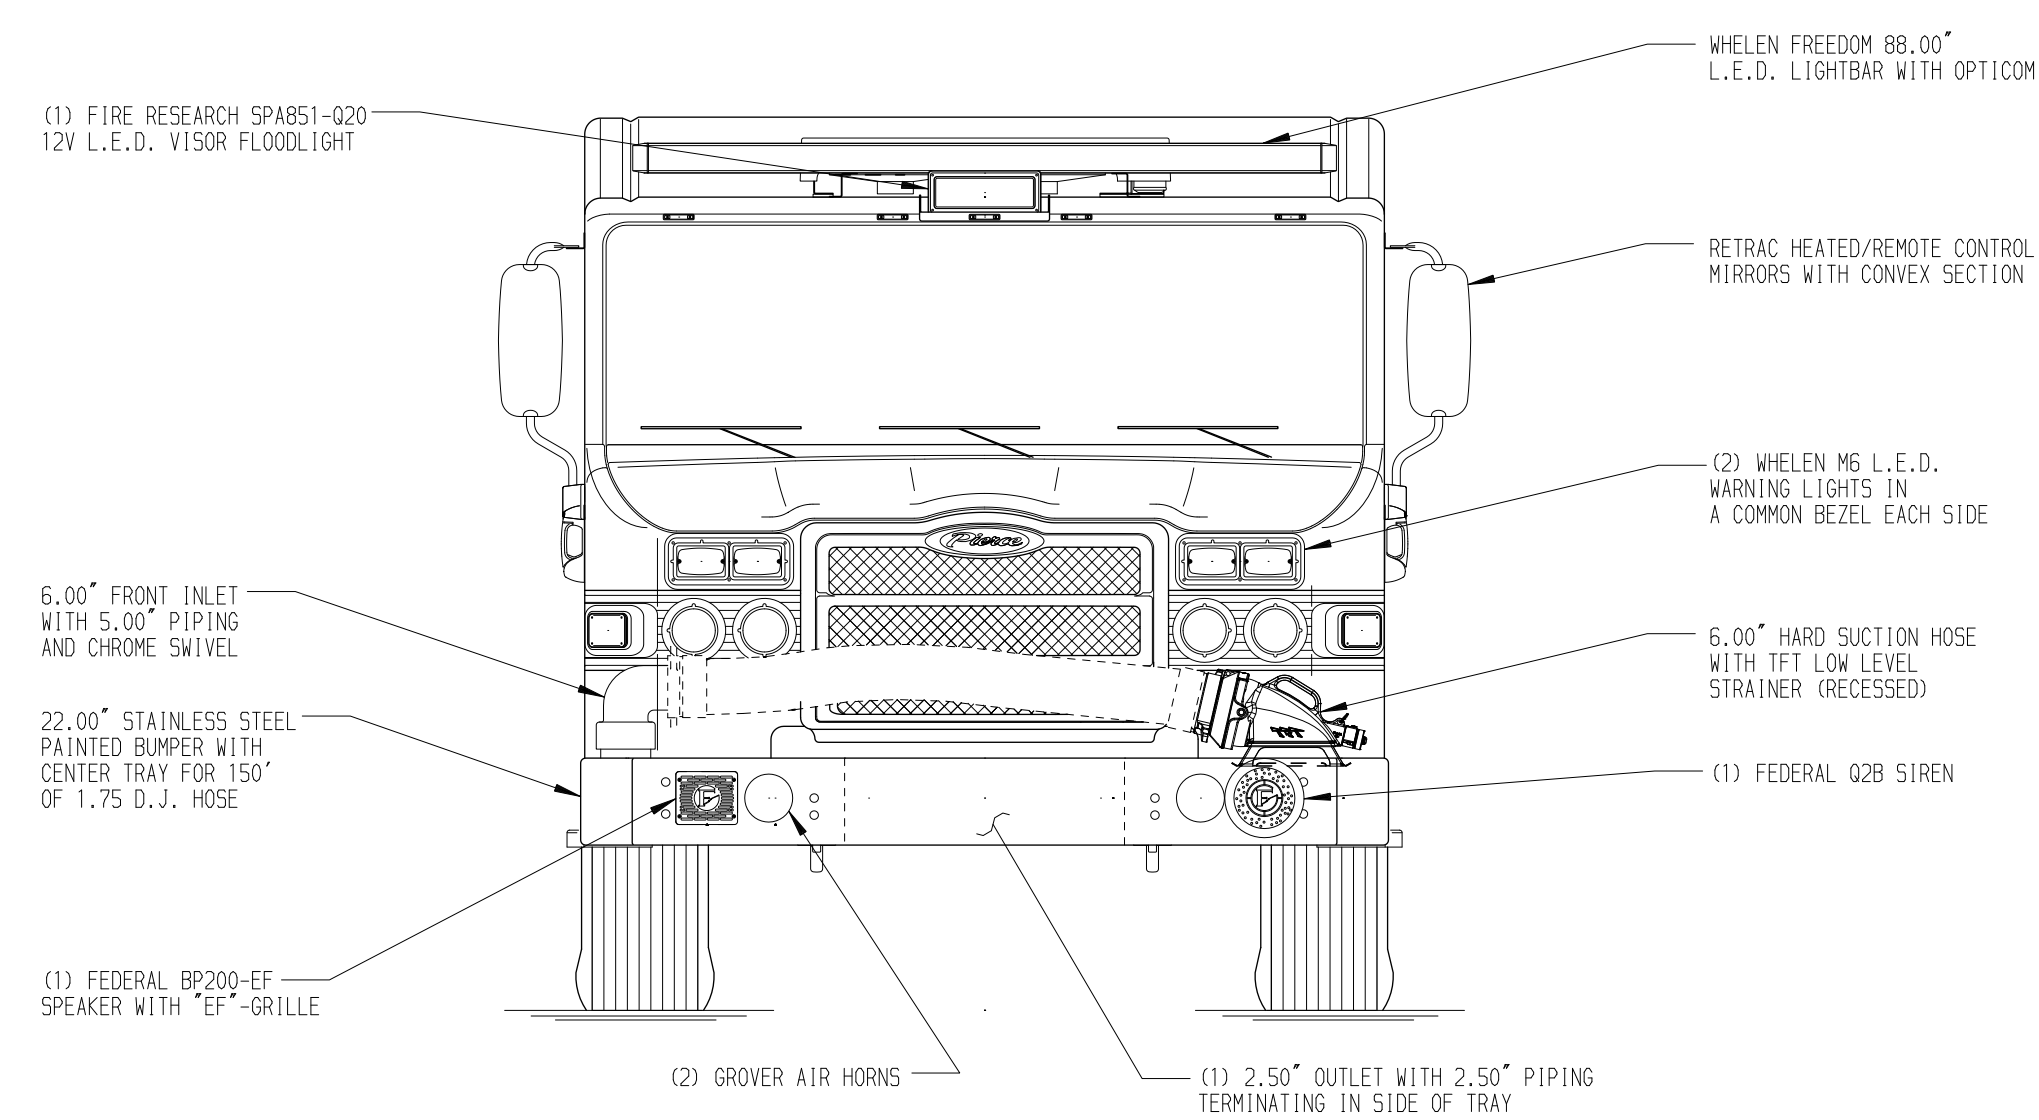


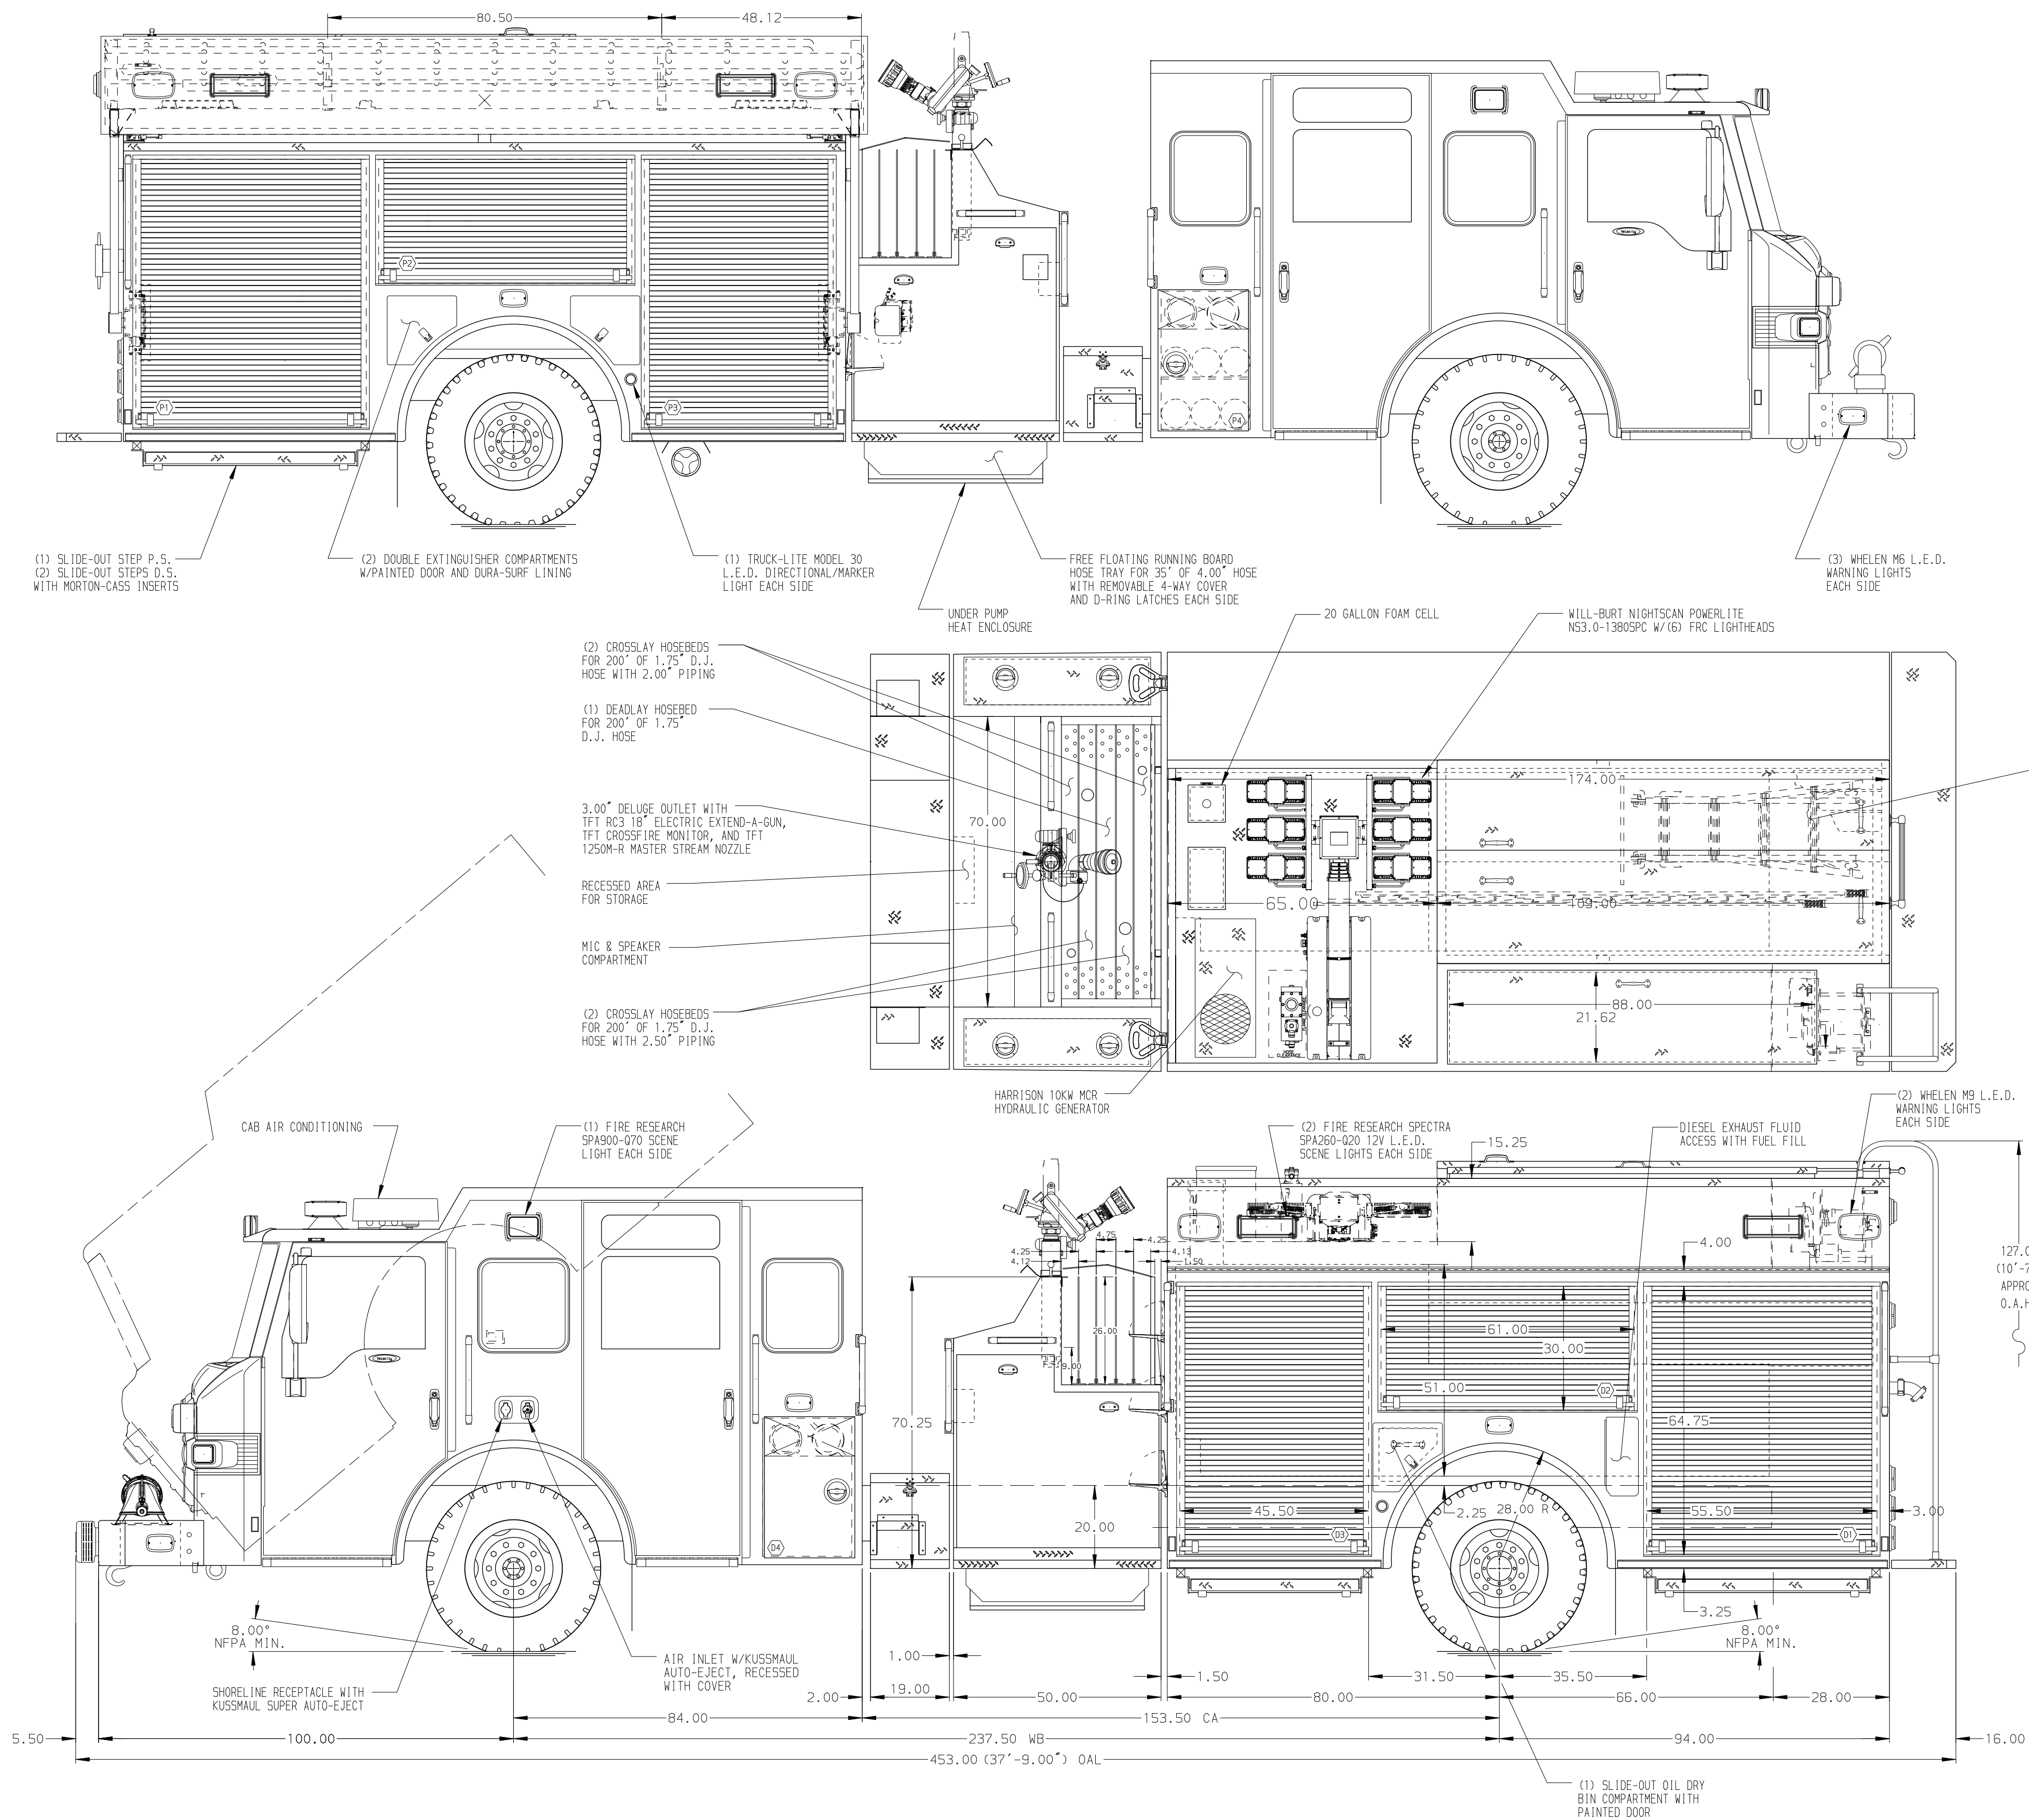

HOSEBED CAPACITIES

- ① - 800' OF 2.50" D.J. POLY HOSE
- ② - 1200' OF 4.00" D.J. POLY HOSE

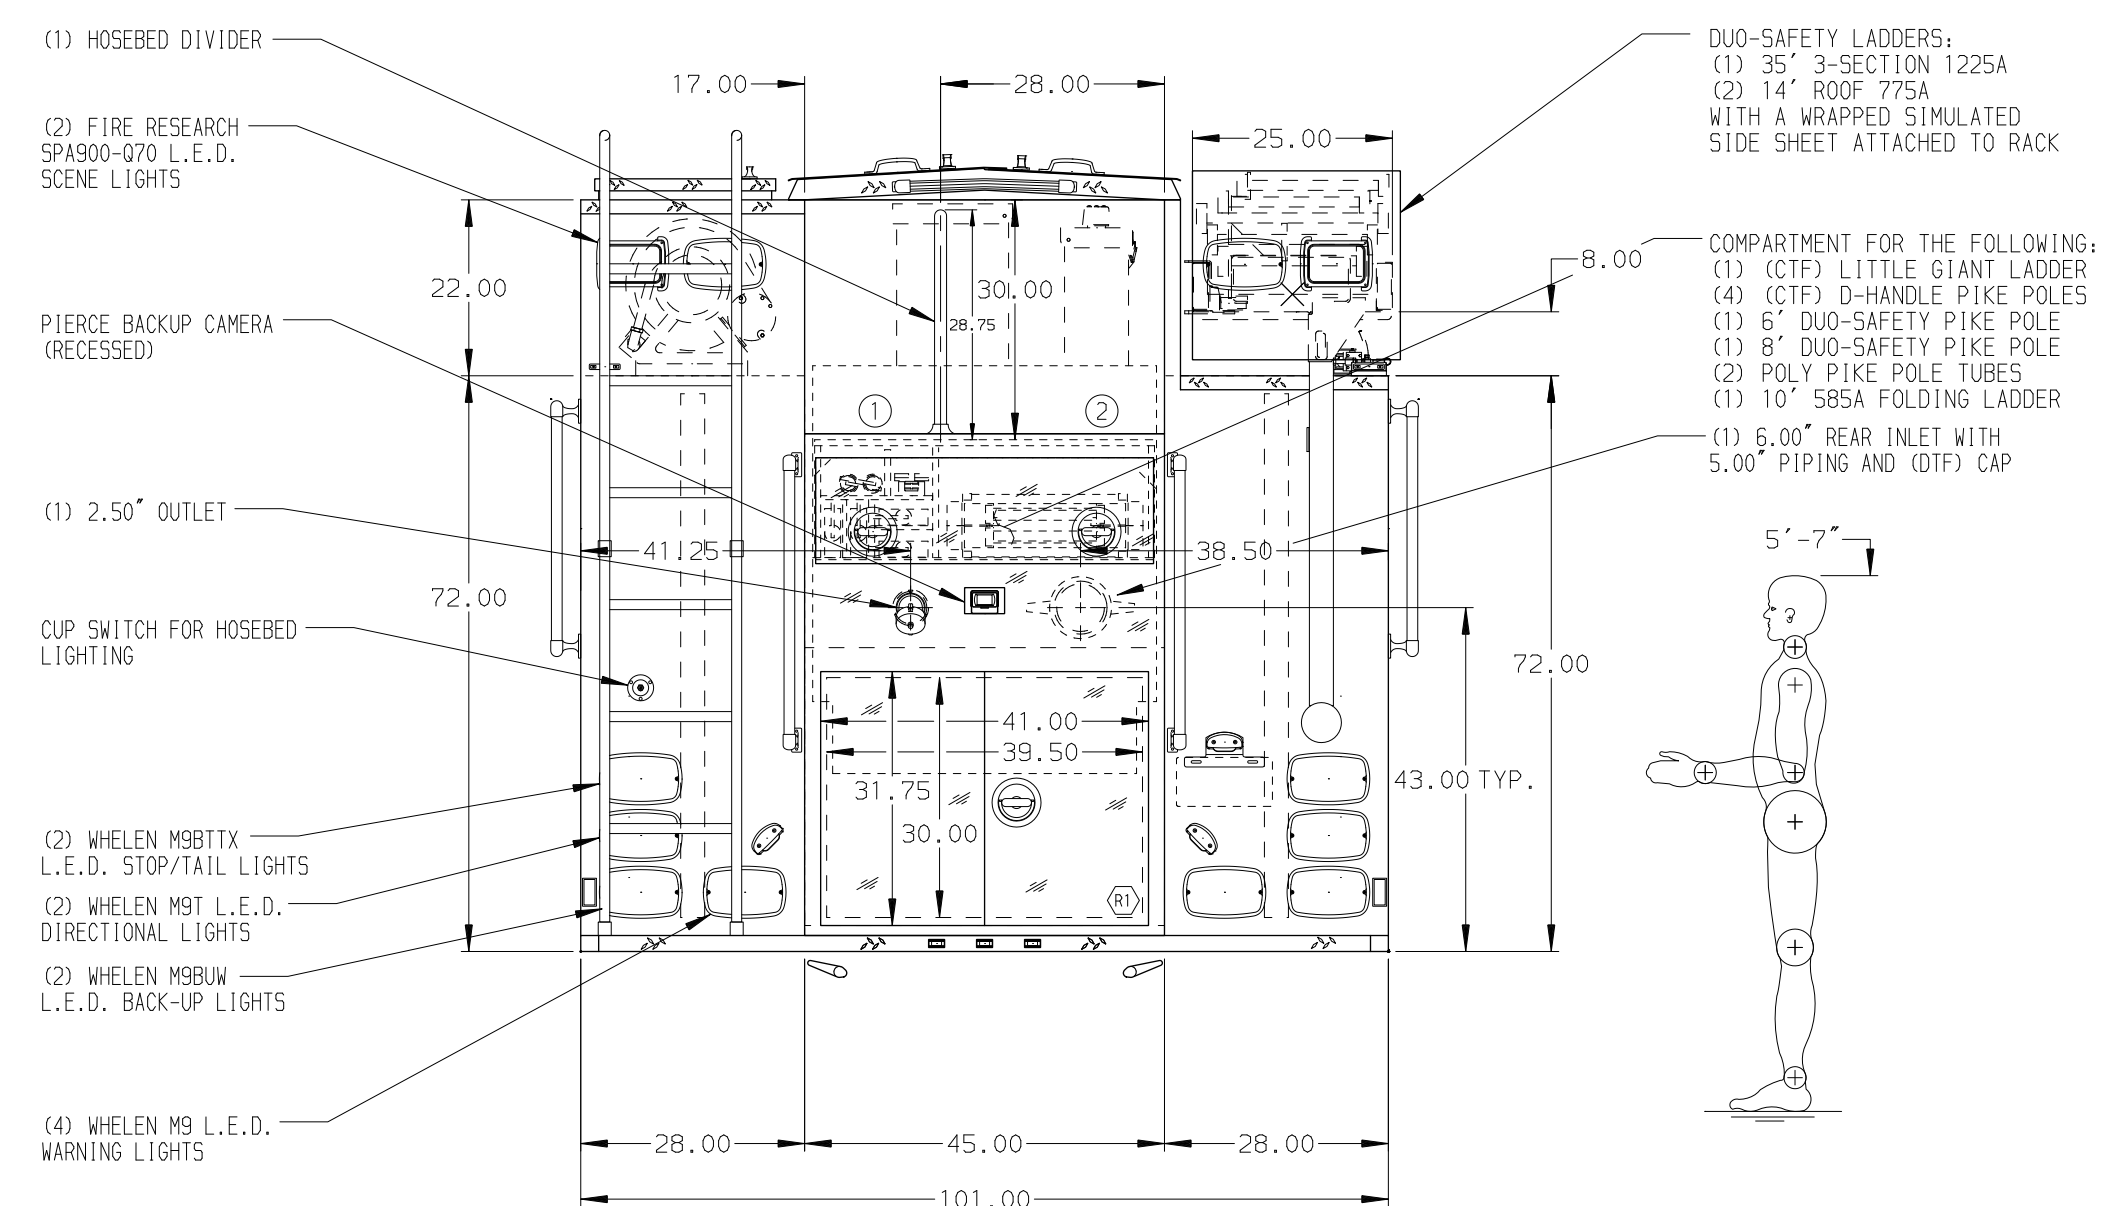

ALUMINUM BODY

TARGET O.A.H. 123.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. 5/STL SCUFFPLATE ON EACH CAB DOOR JAMB
- 2. BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
- 3. STORAGE RACK FOR (4) AIR BOTTLES LOCATED IN COMPARTMENT P4
- 4. 5/STL SCUFFPLATE INTERIOR OF DOORS IN COMPARTMENT P1
- 5. AKRON EDUCATOR SINGLE AGENT FOAM SYSTEM
- 6. HOT WATER HEATER IN PUMP COMPARTMENT
- 7. TWO ZIAMAATC 5AC-44-F FOLDING WHEEL CHOCKS WITH BRACKETS PROVIDED BY CUSTOMER
- 8. TWO DUPLEX RECEPTACLES TO BE LOCATED IN THE CAB PER SHOP ORDER

22JAN16	LST	JBO	CHASSIS	DATA
18JAN16	LST	JBO	MAKE	PIERCE
10DEC15	DDO	JBO	MODEL	VELOCITY FR
28OCT15	DDO	JBO	DATE	BY
02SEP15	DDO	MGE	CH	VELOCITY FR
REV	DATE	BY	CH	VELOCITY FR

		JOB NO.	29342
		SCALE	1:24
		DATE	
		DRAWN BY	DDO
		CHECKED BY	MGE
		SHEET SIZE	D
		SHEET NO.	1 OF 1

TITLE 1750-D-770P, 750G WATER, 20G FOAM CELL; 174" HDRP (4)XLAYS; (1)DEADLAY; GENERATOR; HYD LADDER RACK

FOR SLINGER FIRE DEPARTMENT SLINGER, WISCONSIN

DWG NO. 29342AD-SH1