

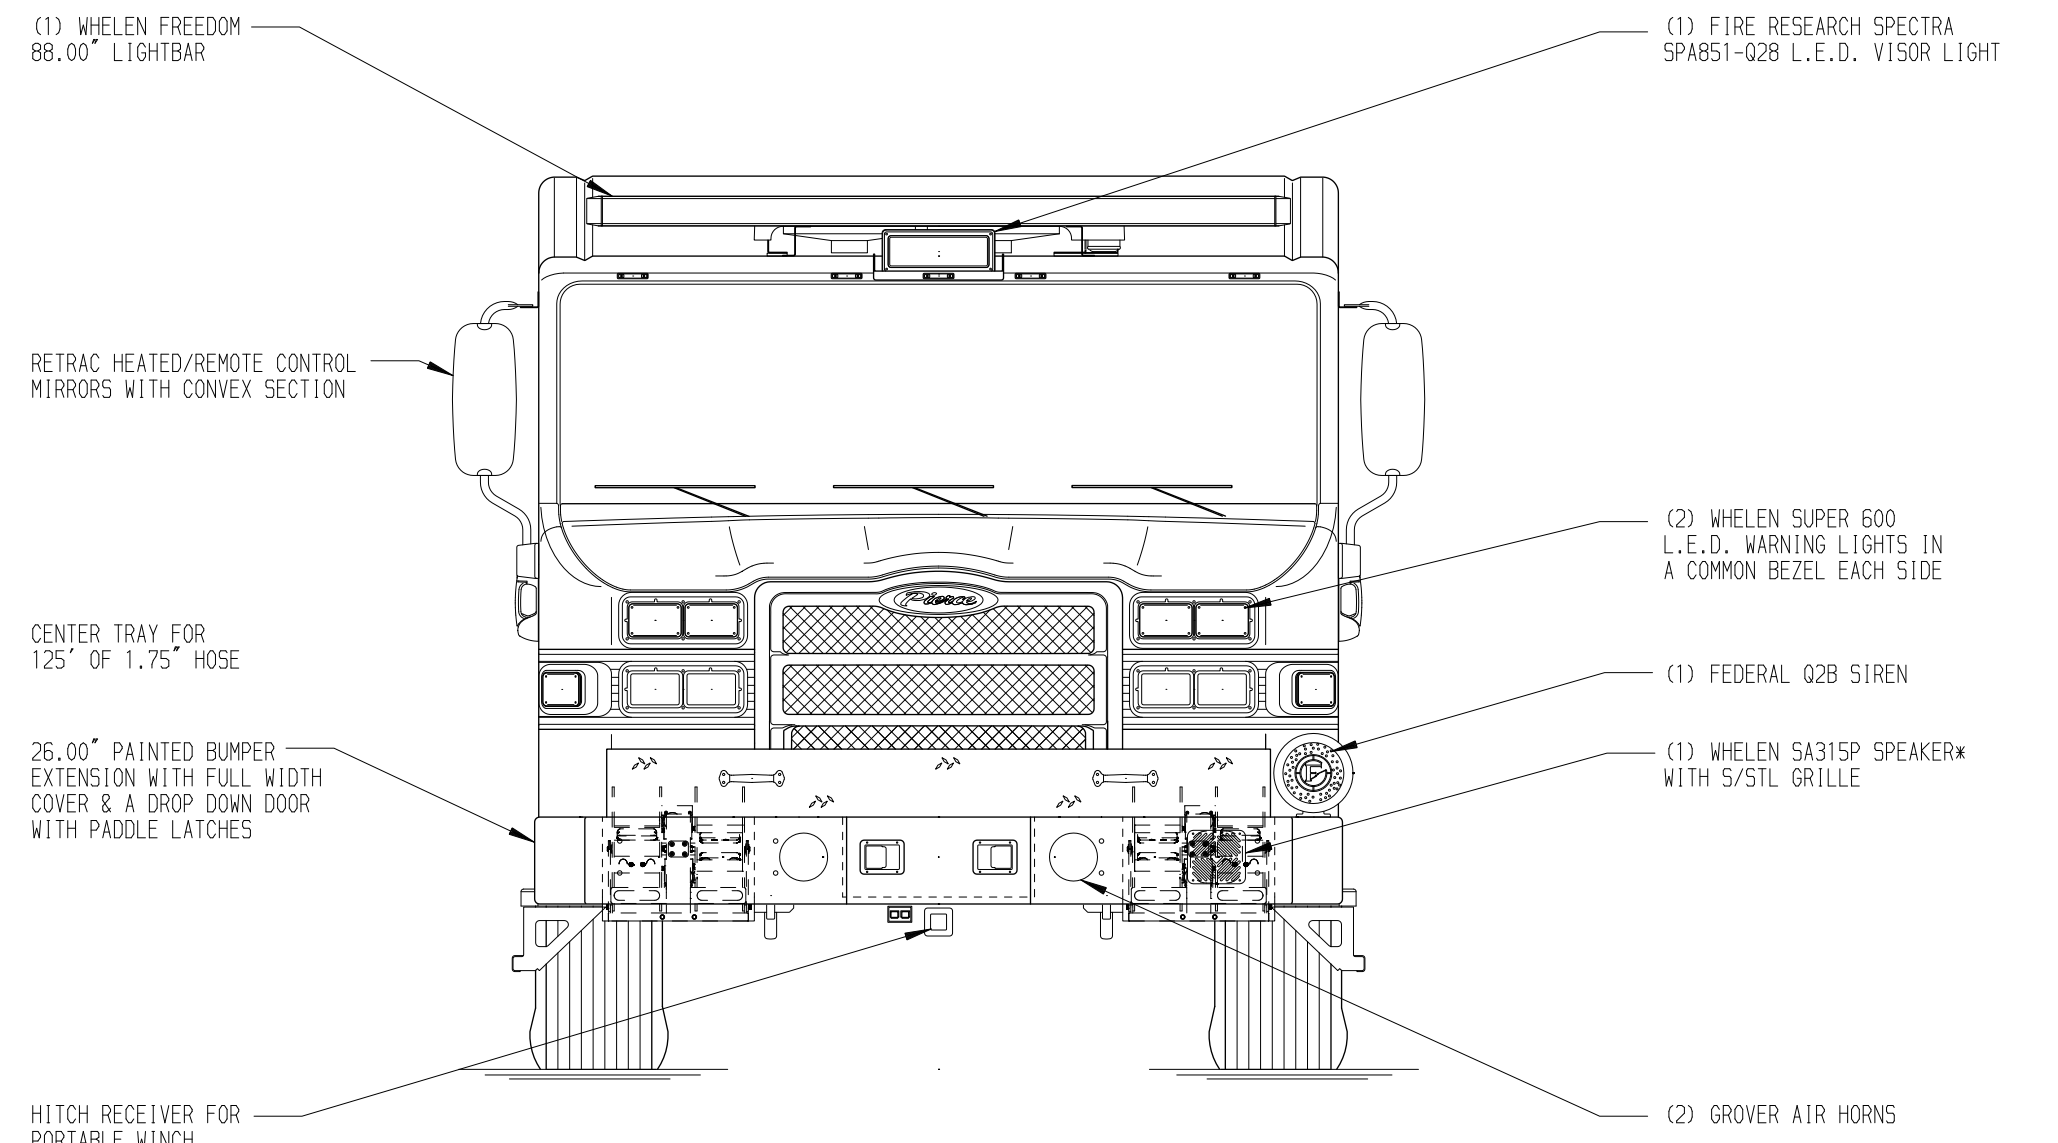
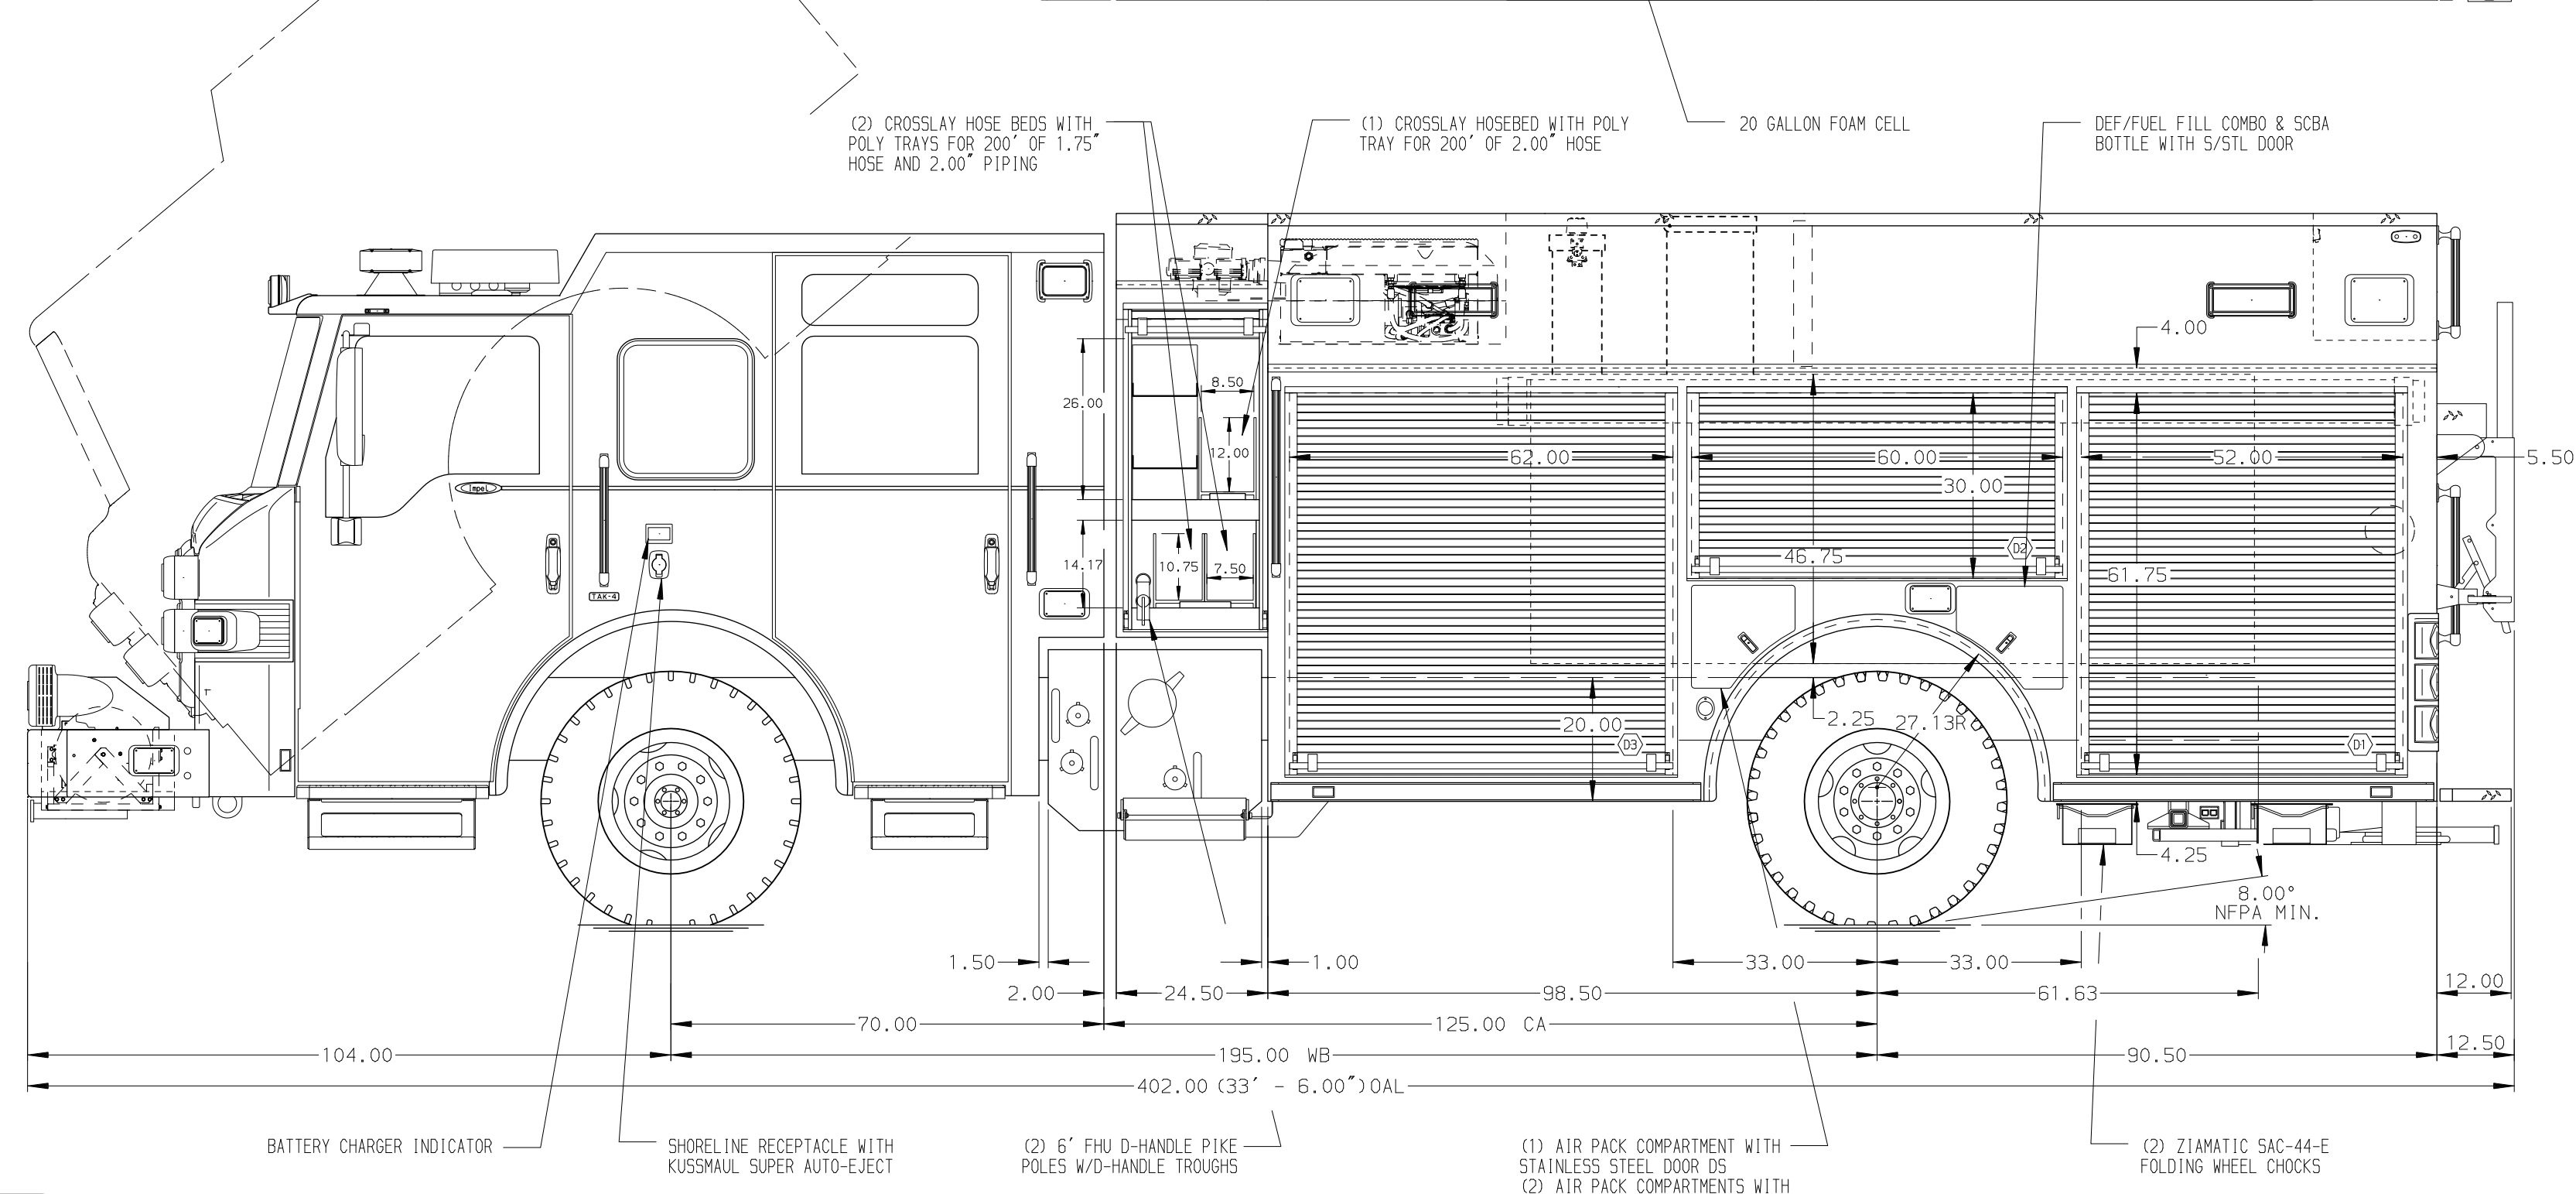
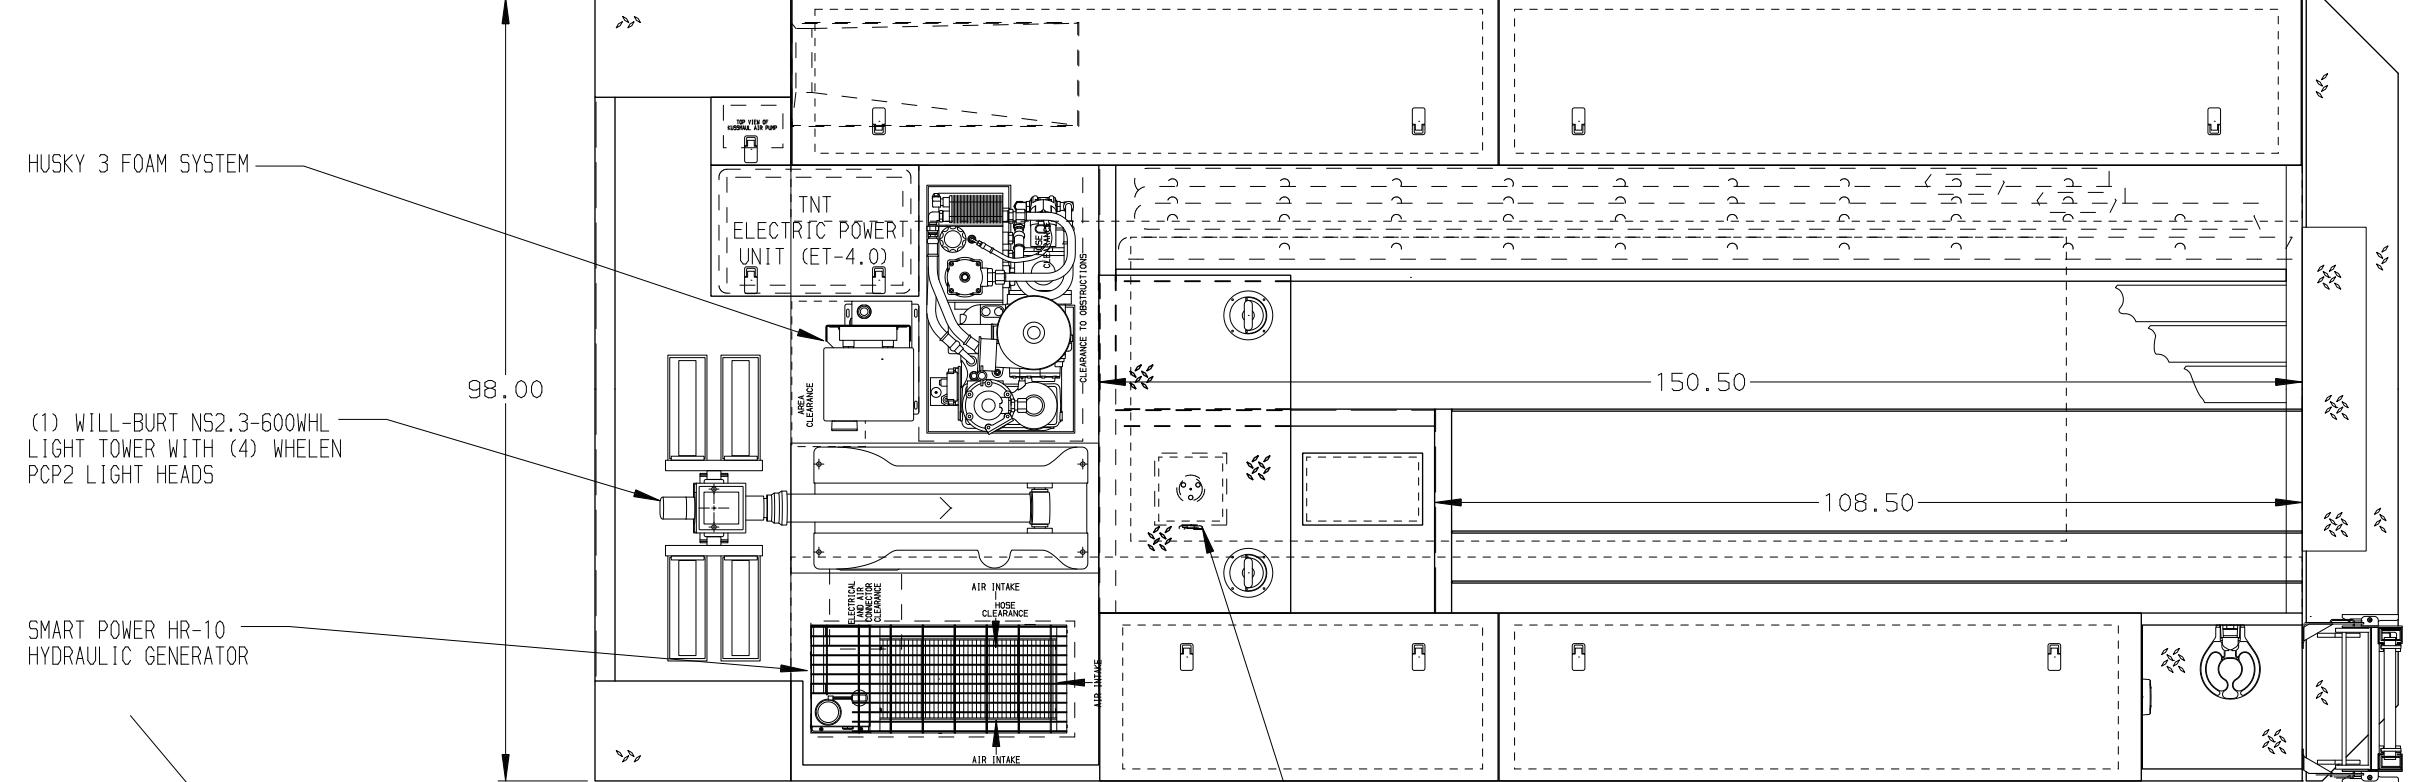


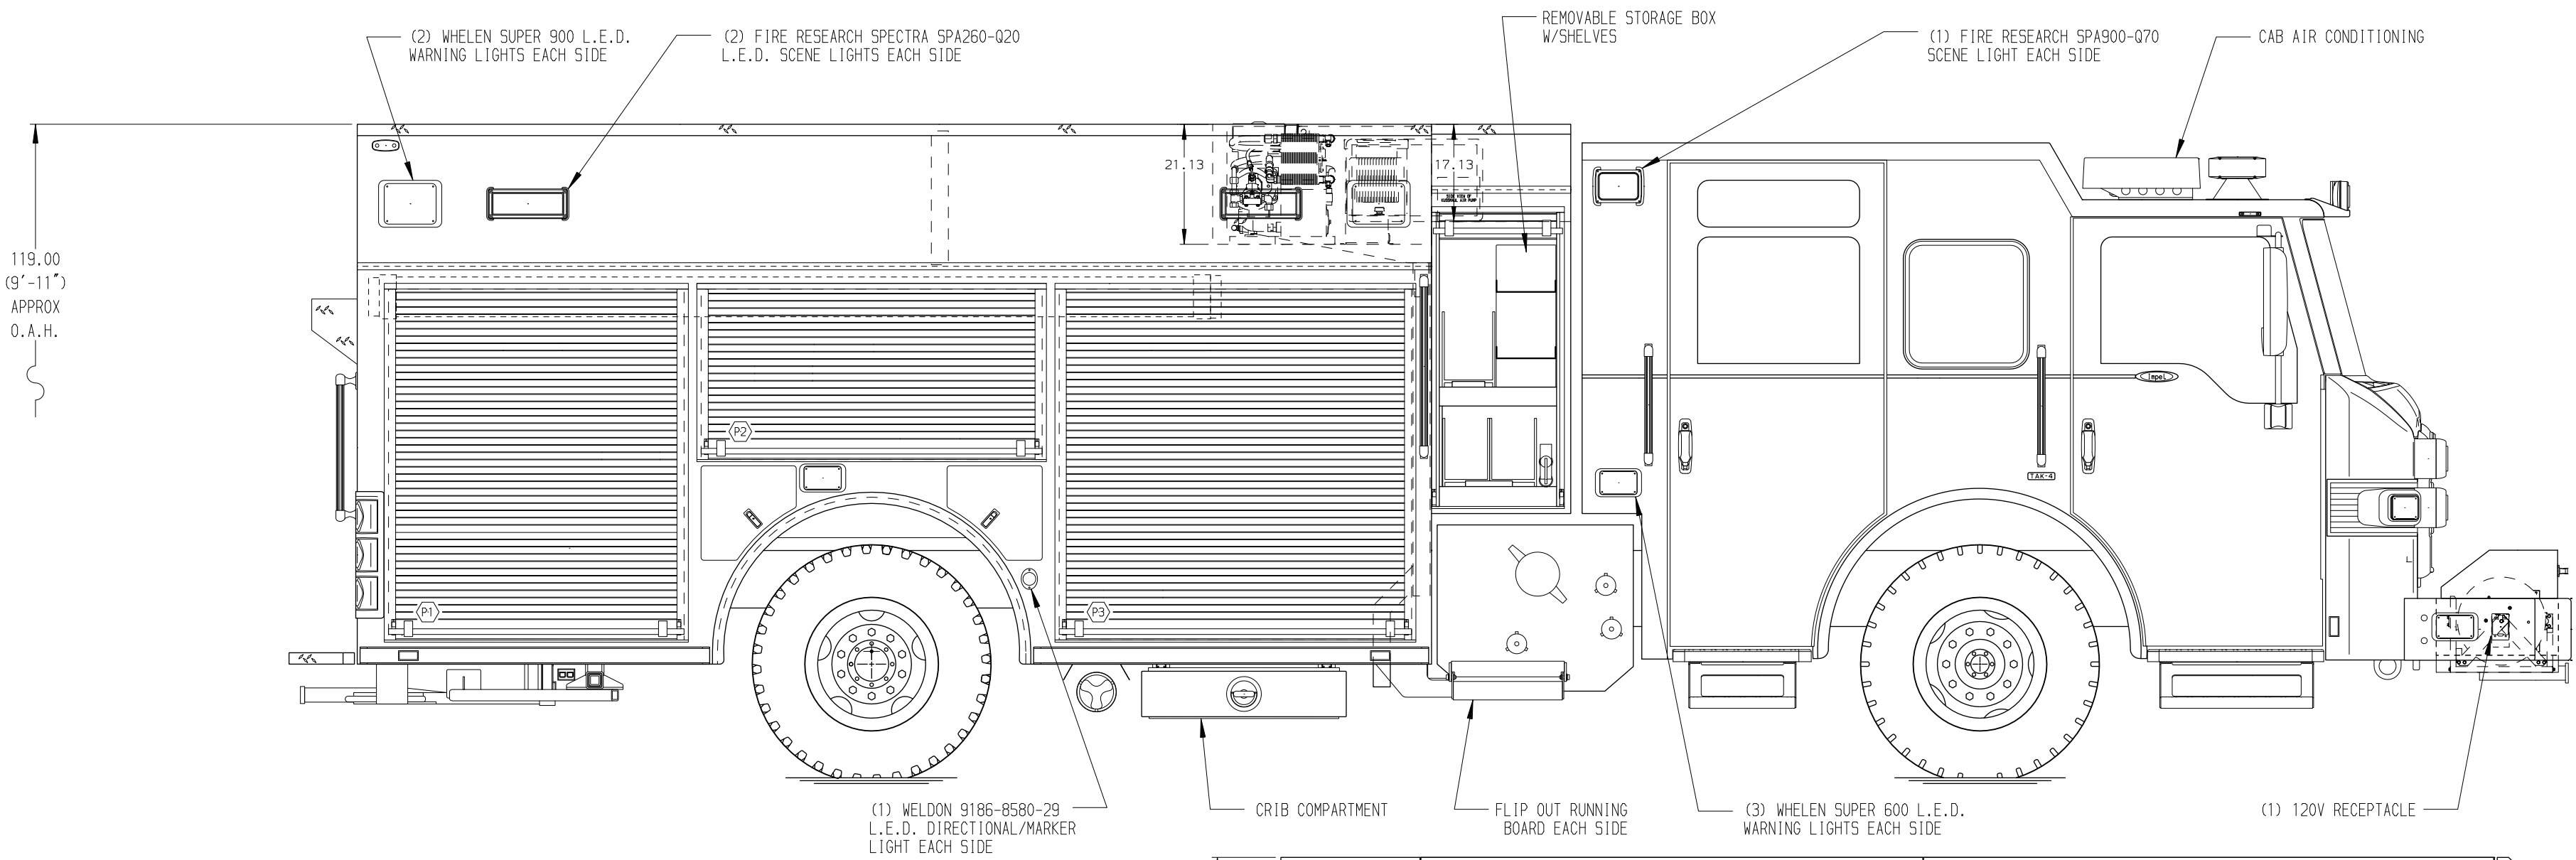

HOSEBED CAPACITIES	
①	- 200' OF 1.75" HOSE
②	- 250' OF 3.00" HOSE
③	- OPEN HOSEBED
④	- 900' OF 5.00" HOSE

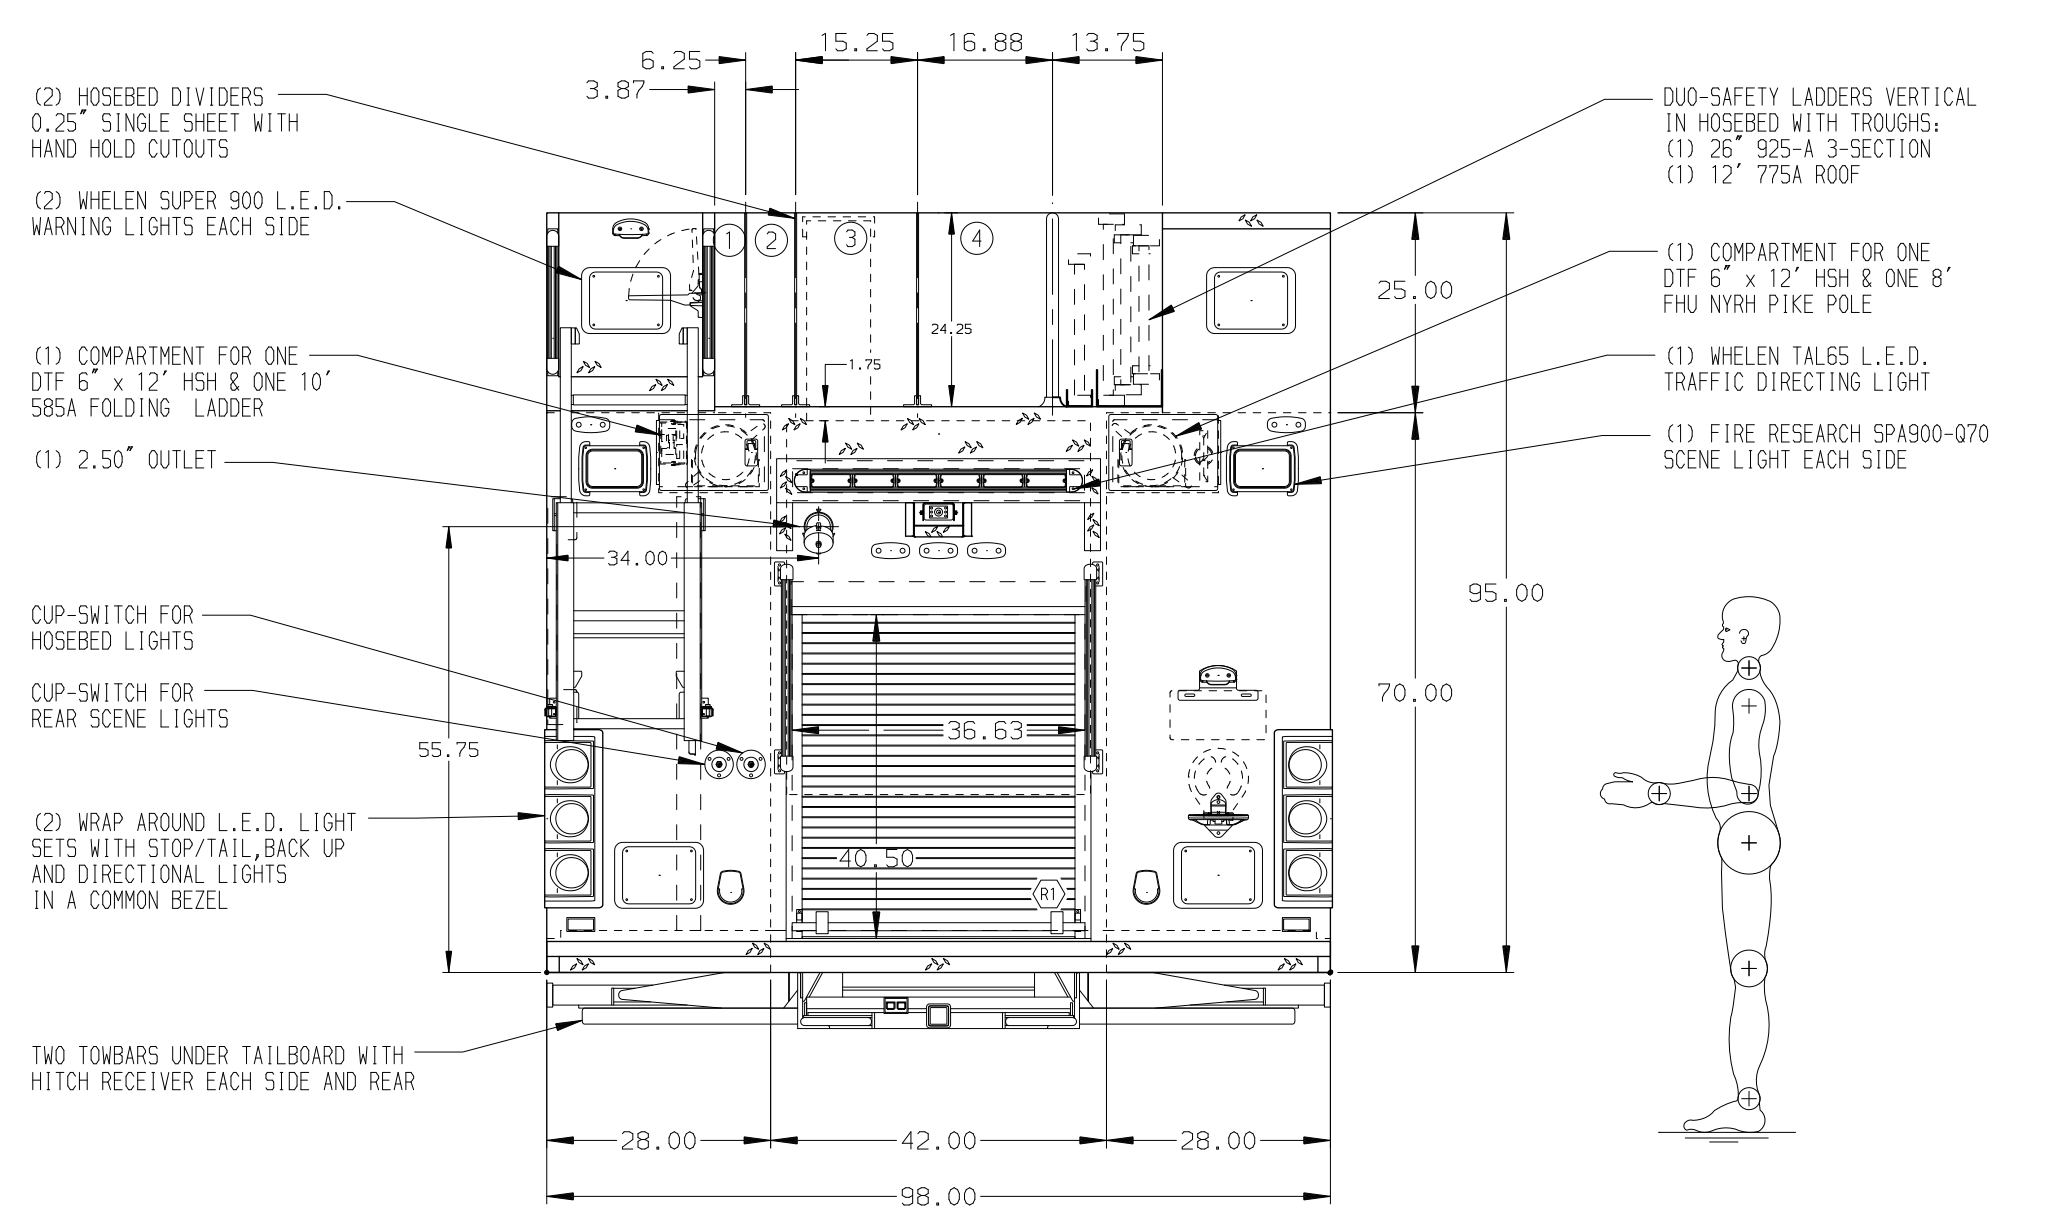

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON DRIVER'S SIDE PUMP PANEL
3. BATTERY CHARGER LOCATED IN PUMP PLUMBING AREA
4. ONE L.E.D. LIGHT STRIP LOCATED ON EACH SIDE IN THE HOSEBED
5. 140 CFM COMPRESSED AIR FOAM SYSTEM
6. ONE HANNAY MODEL 2016-17-18 HYDRAULIC REEL LOCATED EACH SIDE OF FRONT BUMPER WITH A CAPACITY FOR 100' OF 0.25" DUAL HOSE
7. MOUNTING BRACKET FOR HYDRAULIC CUTTER TOOL IN CENTER TOOL TRAY
8. ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL IN FRONT BUMPER HOSE TRAY

REV	DATE	BY	CH	IMPEL FR
06APR16	AMI	DTS	MAKE	PIERCE
03MAR16	AMI	DTS	MAKE	PIERCE
13JAN16	AMI	MGE	MODEL	PIERCE

Pierce MANUFACTURING INC.		JOB NO.	29522
		SCALE	1:24
		DATE	
TITLE		DRAWN BY	06JAN16
FOR		CHECKED BY	06JAN16
DWG NO.		SHEET SIZE	SHEET NO.
29522AD-SH1		D	1 OF 2