

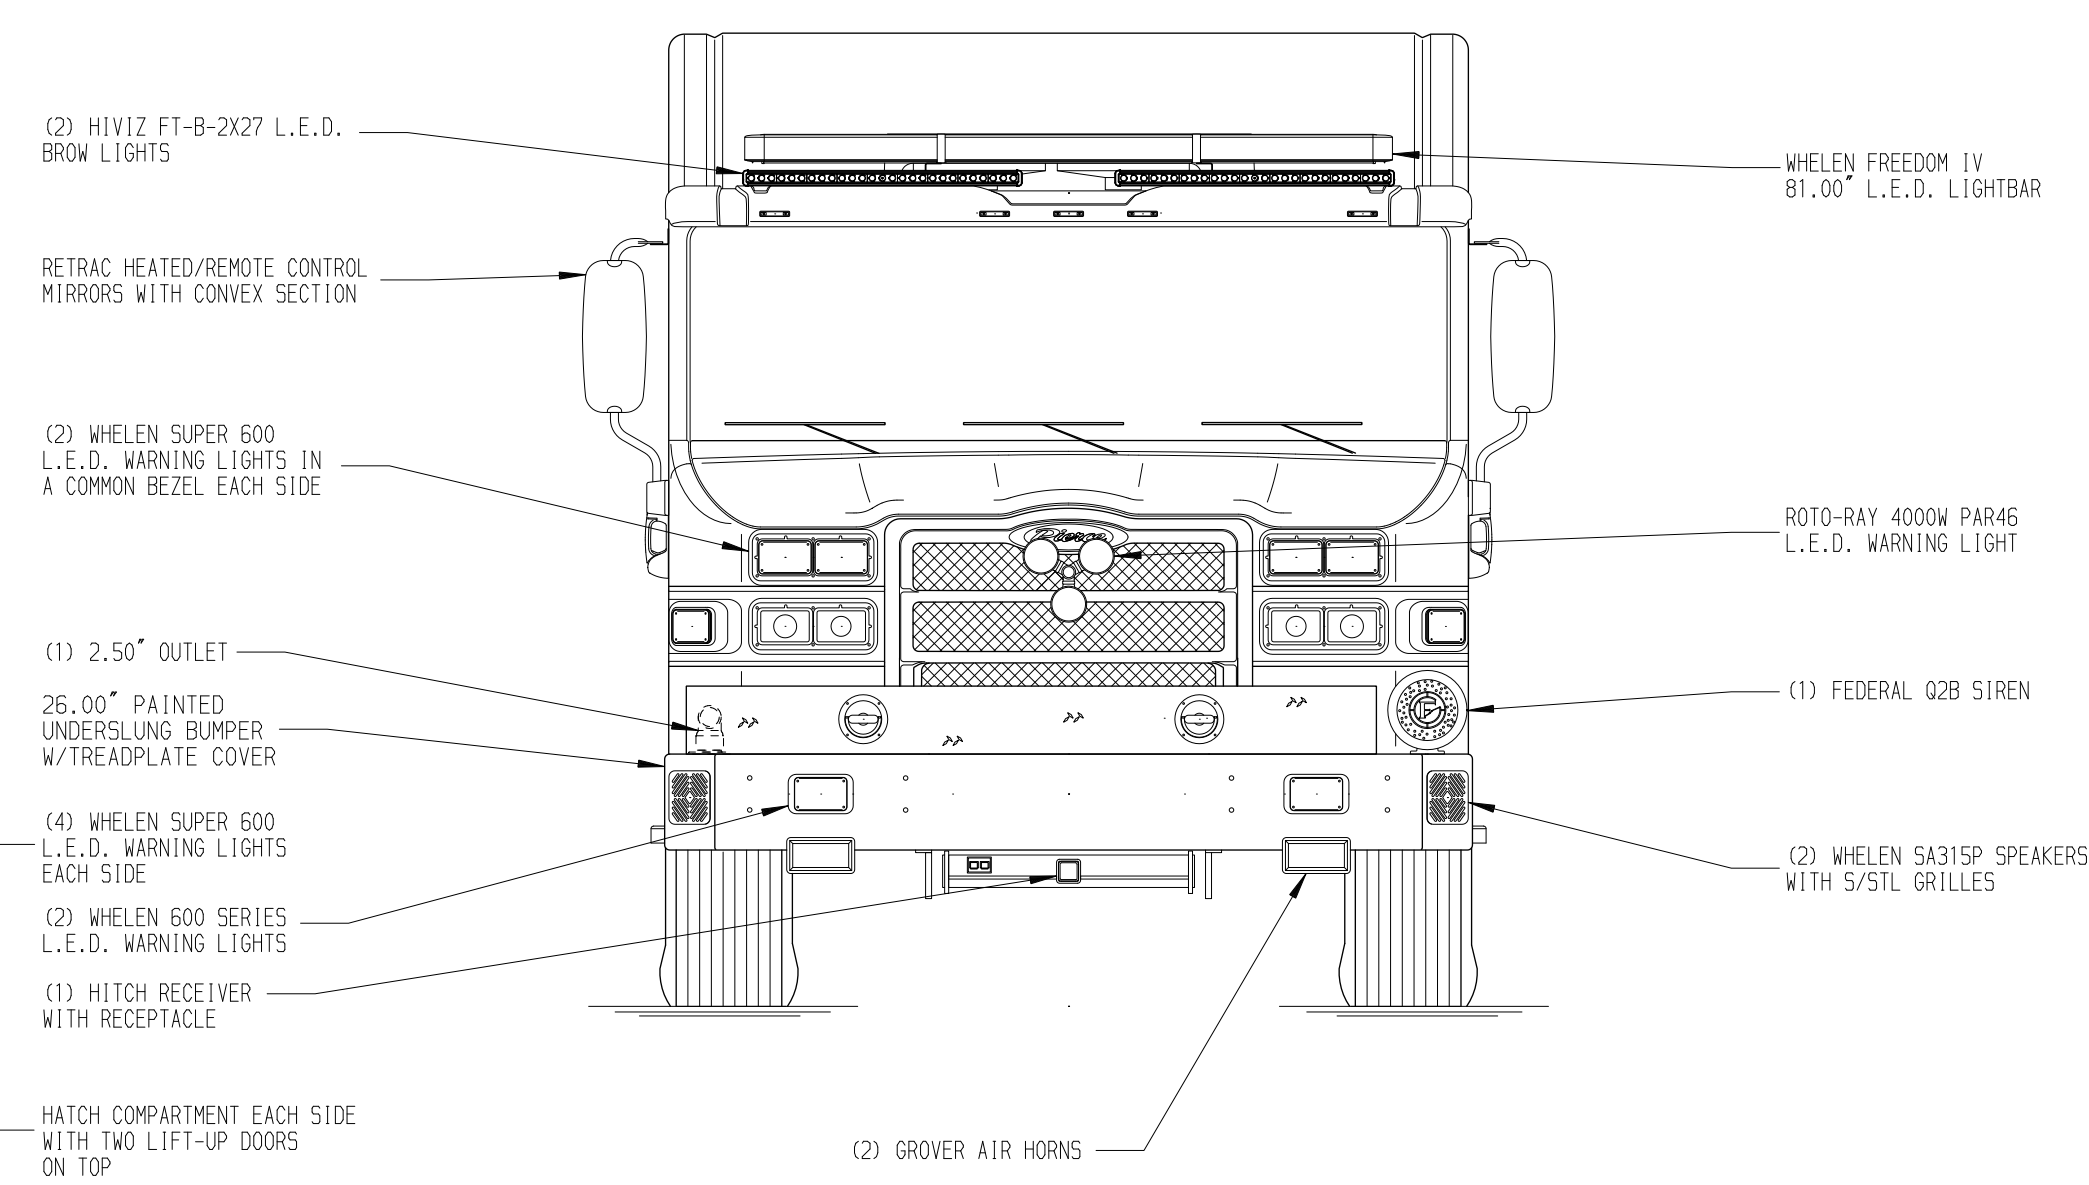


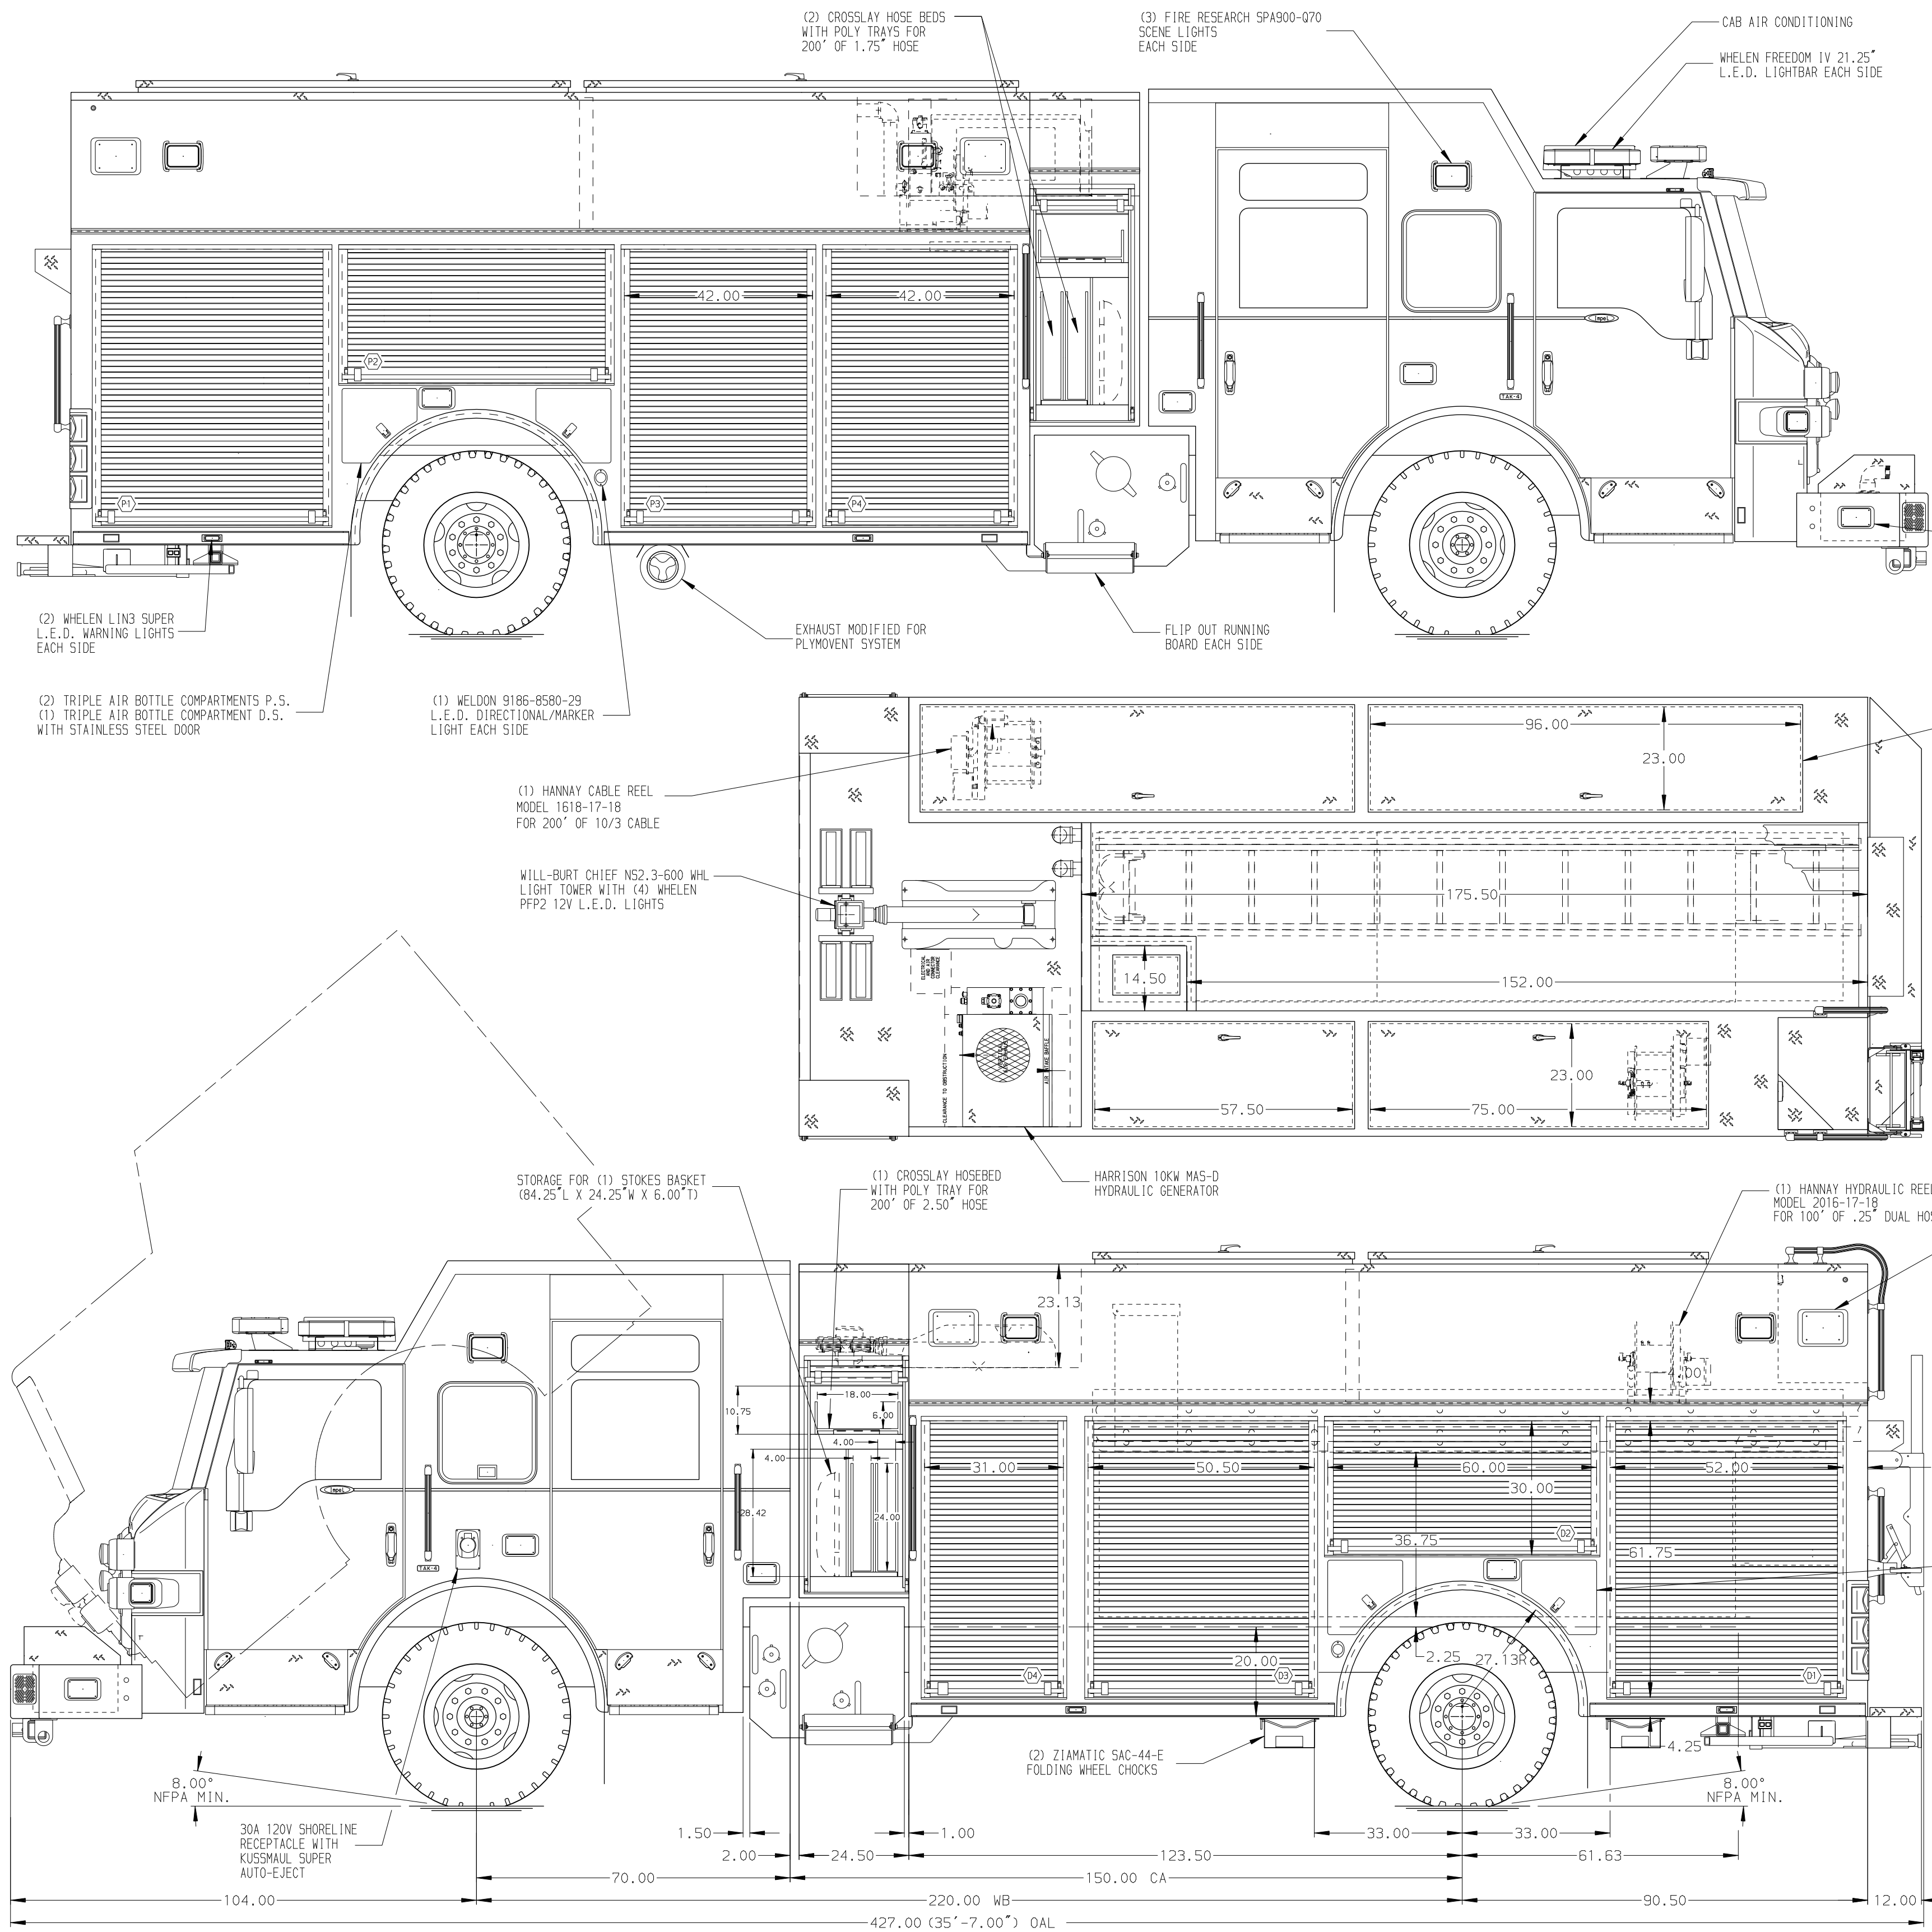

HOSEBED CAPACITIES	
①	300' OF 3.00" D.J. HOSE
②	1200' OF 4.00" D.J. HOSE
③	200' OF 3.00" D.J. HOSE
④	300' OF 3.00" D.J. HOSE

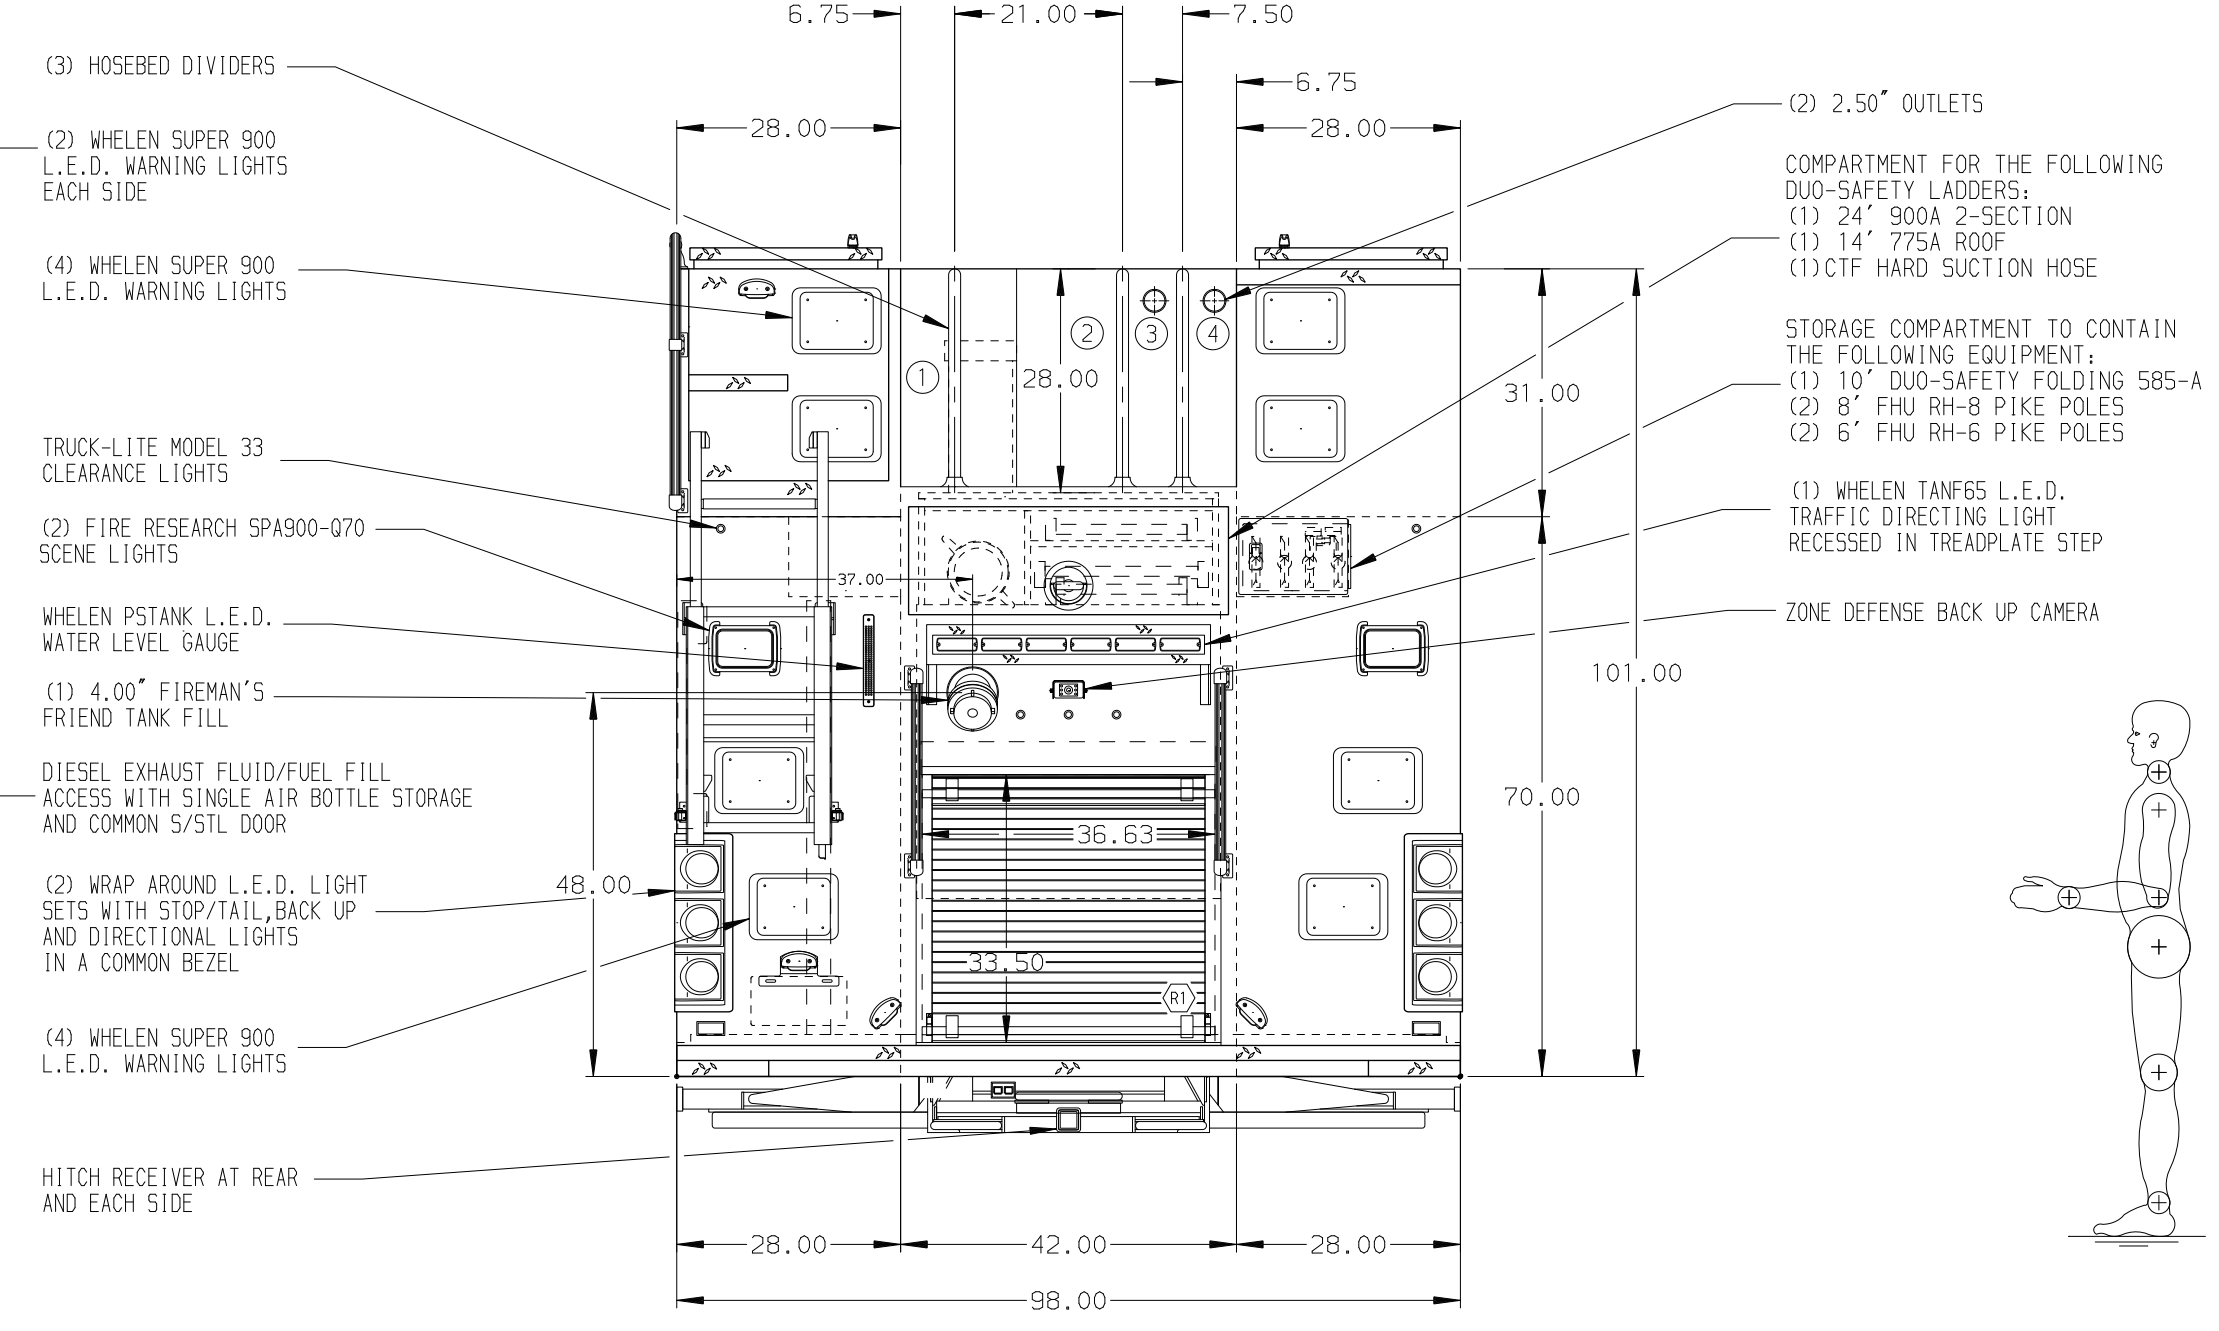

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER INDICATOR BEHIND DRIVER'S SEAT DISPLAYED THROUGH WINDOW
- ONE L.E.D. LIGHT STRIP LOCATED ON EACH SIDE IN THE HOSEBED
- PULL STRAP ON DOOR IN COMPARTMENTS D2,P2
- TWO ADJUSTABLE FULL WIDTH/FULL DEPTH SHELVES IN COMPARTMENTS P1
- TWO FLOOR MOUNTED SLIDE-OUT TRAY WITH 2" SIDES IN COMPARTMENTS D1
- TWO SLIDE-OUT ALUMINUM TOOL BOARDS IN COMPARTMENTS P4
- ONE SWING-OUT ALUMINUM TOOL BOARD IN COMPARTMENTS D3,P3,TWO IN D2
- ONE HORIZONTAL PARTITION IN COMPARTMENT D3,P3
- ONE VERTICAL BOLT-IN PARTITION BETWEEN COMPARTMENTS P1-P1
- ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENTS D2,D3,P1,P3,P4

- 6-SLOT AIR BAG RACK IN COMPARTMENT P2
- CIRCUIT BREAKER PANEL IN COMPARTMENT D1
- AIR INLET/OUTLET W/DISCONNECT FITTING LOCATED ON D.S. PUMP PANEL
- KUSSMAUL PUMP PLUS CHARGER LOCATED BEHIND DRIVER'S SEAT
- WIRING FOR CUSTOMER SUPPLIED AUTOMATIC TIRE CHAINS
- ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT D1
- ONE ADJUSTABLE TILTING SLIDE-OUT LOCATED IN COMPARTMENT P2
- ONE "L" SHAPED PARTITION LOCATION IN COMPARTMENT D1
- CTF AMKUS EF25 POWER UNIT LOCATED IN COMPARTMENT D1

- HANNAY CABLE REEL MODEL 1618-17-18 FOR 200' OF 10/3 CABLE
- WILL-BURT CHIEF NS2.3-600 WHL LIGHT TOWER WITH (4) WHELEN PFP2 12V L.E.D. LIGHTS
- CROSSLAY HOSEBED WITH POLY TRAY FOR 200' OF 2.50" HOSE
- HARRISON 10KW MAS-D HYDRAULIC GENERATOR
- HANNAY HYDRAULIC REEL MODEL 2016-17-18 FOR 100' OF .25" DUAL HOSE
- STOKES BASKET (84.25" L X 24.25" W X 6.00" D)
- WHEEL FREEDOM IV 21.25" L.E.D. LIGHTBAR EACH SIDE
- WHEEL LINQ SUPER L.E.D. WARNING LIGHTS EACH SIDE
- TRIPLE AIR BOTTLE COMPARTMENTS P.S. (1) TRIPLE AIR BOTTLE COMPARTMENT D.S. WITH STAINLESS STEEL DOOR
- WELDON 9186-8580-29 L.E.D. DIRECTIONAL/MARKER LIGHT EACH SIDE
- EXHAUST MODIFIED FOR PLYMOVENT SYSTEM
- FLIP OUT RUNNING BOARD EACH SIDE
- FIRE RESEARCH SPA900-Q70 SCENE LIGHTS EACH SIDE
- CAB AIR CONDITIONING
- WHEEL FREEDOM IV 21.25" L.E.D. LIGHTBAR EACH SIDE
- RETRAC HEATED/REMOTE CONTROL MIRRORS WITH CONVEX SECTION
- WHEEL SUPER 600 L.E.D. WARNING LIGHTS IN A COMMON BEZEL EACH SIDE
- 26.00" PAINTED UNDERSLUNG BUMPER W/TREADPLATE COVER
- WHEEL SUPER 600 L.E.D. WARNING LIGHTS EACH SIDE
- WHEEL 600 SERIES L.E.D. WARNING LIGHTS
- HITCH RECEIVER WITH RECEPTACLE
- HATCH COMPARTMENT EACH SIDE WITH TWO LIFT-UP DOORS ON TOP
- WHEEL SUPER 900 L.E.D. WARNING LIGHTS EACH SIDE
- WHEEL SUPER 900 L.E.D. WARNING LIGHTS
- TRUCK-LITE MODEL 33 CLEARANCE LIGHTS
- FIRE RESEARCH SPA900-Q70 SCENE LIGHTS
- WHELEN PSTANK L.E.D. WATER LEVEL GAUGE
- 4.00" FIREMAN'S FRIEND TANK FILL
- DIESEL EXHAUST FLUID/FUEL FILL ACCESS WITH SINGLE AIR BOTTLE STORAGE AND COMMON 5/STL DOOR
- WRAP AROUND L.E.D. LIGHT SETS WITH STOP/TAIL,BACK UP AND DIRECTIONAL LIGHTS IN A COMMON BEZEL
- WHEEL SUPER 900 L.E.D. WARNING LIGHTS
- HITCH RECEIVER AT REAR AND EACH SIDE
- HOSEBED DIVIDERS
- 2.50" OUTLETS
- COMPARTMENT FOR THE FOLLOWING DUO-SAFETY LADDERS:
(1) 24' 900A 2-SECTION
(1) 14' 775A ROOF
(1)CTF HARD SUCTION HOSE
- STORAGE COMPARTMENT TO CONTAIN THE FOLLOWING EQUIPMENT:
(1) 10' DUO-SAFETY FOLDING 585-A
(2) 8' FHU RH-8 PIKE POLES
(2) 6' FHU RH-6 PIKE POLES
- WHELEN TANF65 L.E.D. TRAFFIC DIRECTING LIGHT RECESSED IN TREADPLATE STEP
- ZONE DEFENSE BACK UP CAMERA

Pierce MANUFACTURING INC.		JOB NO.	29550
		SCALE	1:24
		DATE	
		DRAWN BY	JWO
		DATE	06JAN16
		CHECKED BY	KBO
		DATE	08JAN16
		SHEET SIZE	D
		SHEET NO.	1 OF 1

REV	DATE	BY	CH	IMPEL
1	11APR	JWO	GHO	
2	14MAR16	JWO	GHO	
3	11MAR16	JWO	GHO	
4	15JAN16	JWO	KBO	

TITLE	1500-D-750P,214",FULL HEIGHT,FULL DEPTH,PUC
FOR	(3) X-LAYS,DELUGE,GENERATOR,CABLE REEL
DWG NO.	EBENEZER FIRE DEPARTMENT
	EBENEZER, NORTH CAROLINA
	29550AD