

Pumper, PUC

BODY

Pumper, PUC, Aluminum

CHASSIS

Enforcer Chassis, PUC

CHASSIS

AXLE, FRONT, CUSTOM

18,000 Lb Dana Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Stainless Steel

CAB

7010 Enforcer Cab, PUC

BODY

WATER TANK

750 Gallon Poly Water Tank

COMPT, PUMPER, REAR

39.50" FF RollUp Rear Compt w/Space Saver, PUC

COMPT, PUMPER, DRIVER SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

COMPT, PUMPER PASS. SIDE

189" RollUp Full Height & Depth Front & Rear, PUC

FIRE SUPPRESSION

PUMPHOUSE

Control Zone, PUC

PUMP

1500 GPM Pierce PUC

CROSSLAYS, 1.50"

(2) 1.50", Poly Trays, 200'

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

GENERATOR

Generator Not Required

Foam System

Husky 3 Single Agent Foam System

Foam Cell

30 Gallon Foam Cell, Not Reduced Water, PUC

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY

2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB

3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL


4. BATTERY CHARGER LOCATED IN PUC PLUMBING AREA

5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER

6. FIVE ADJUSTABLE SHELVES LOCATED PER SHOP ORDER

7. TWO FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER

8. HANNAY BOOSTER REEL MODEL SBEP34-23-24 LOCATED IN CARGO AREA FOR 200' OF 1.00" BOOSTER HOSE

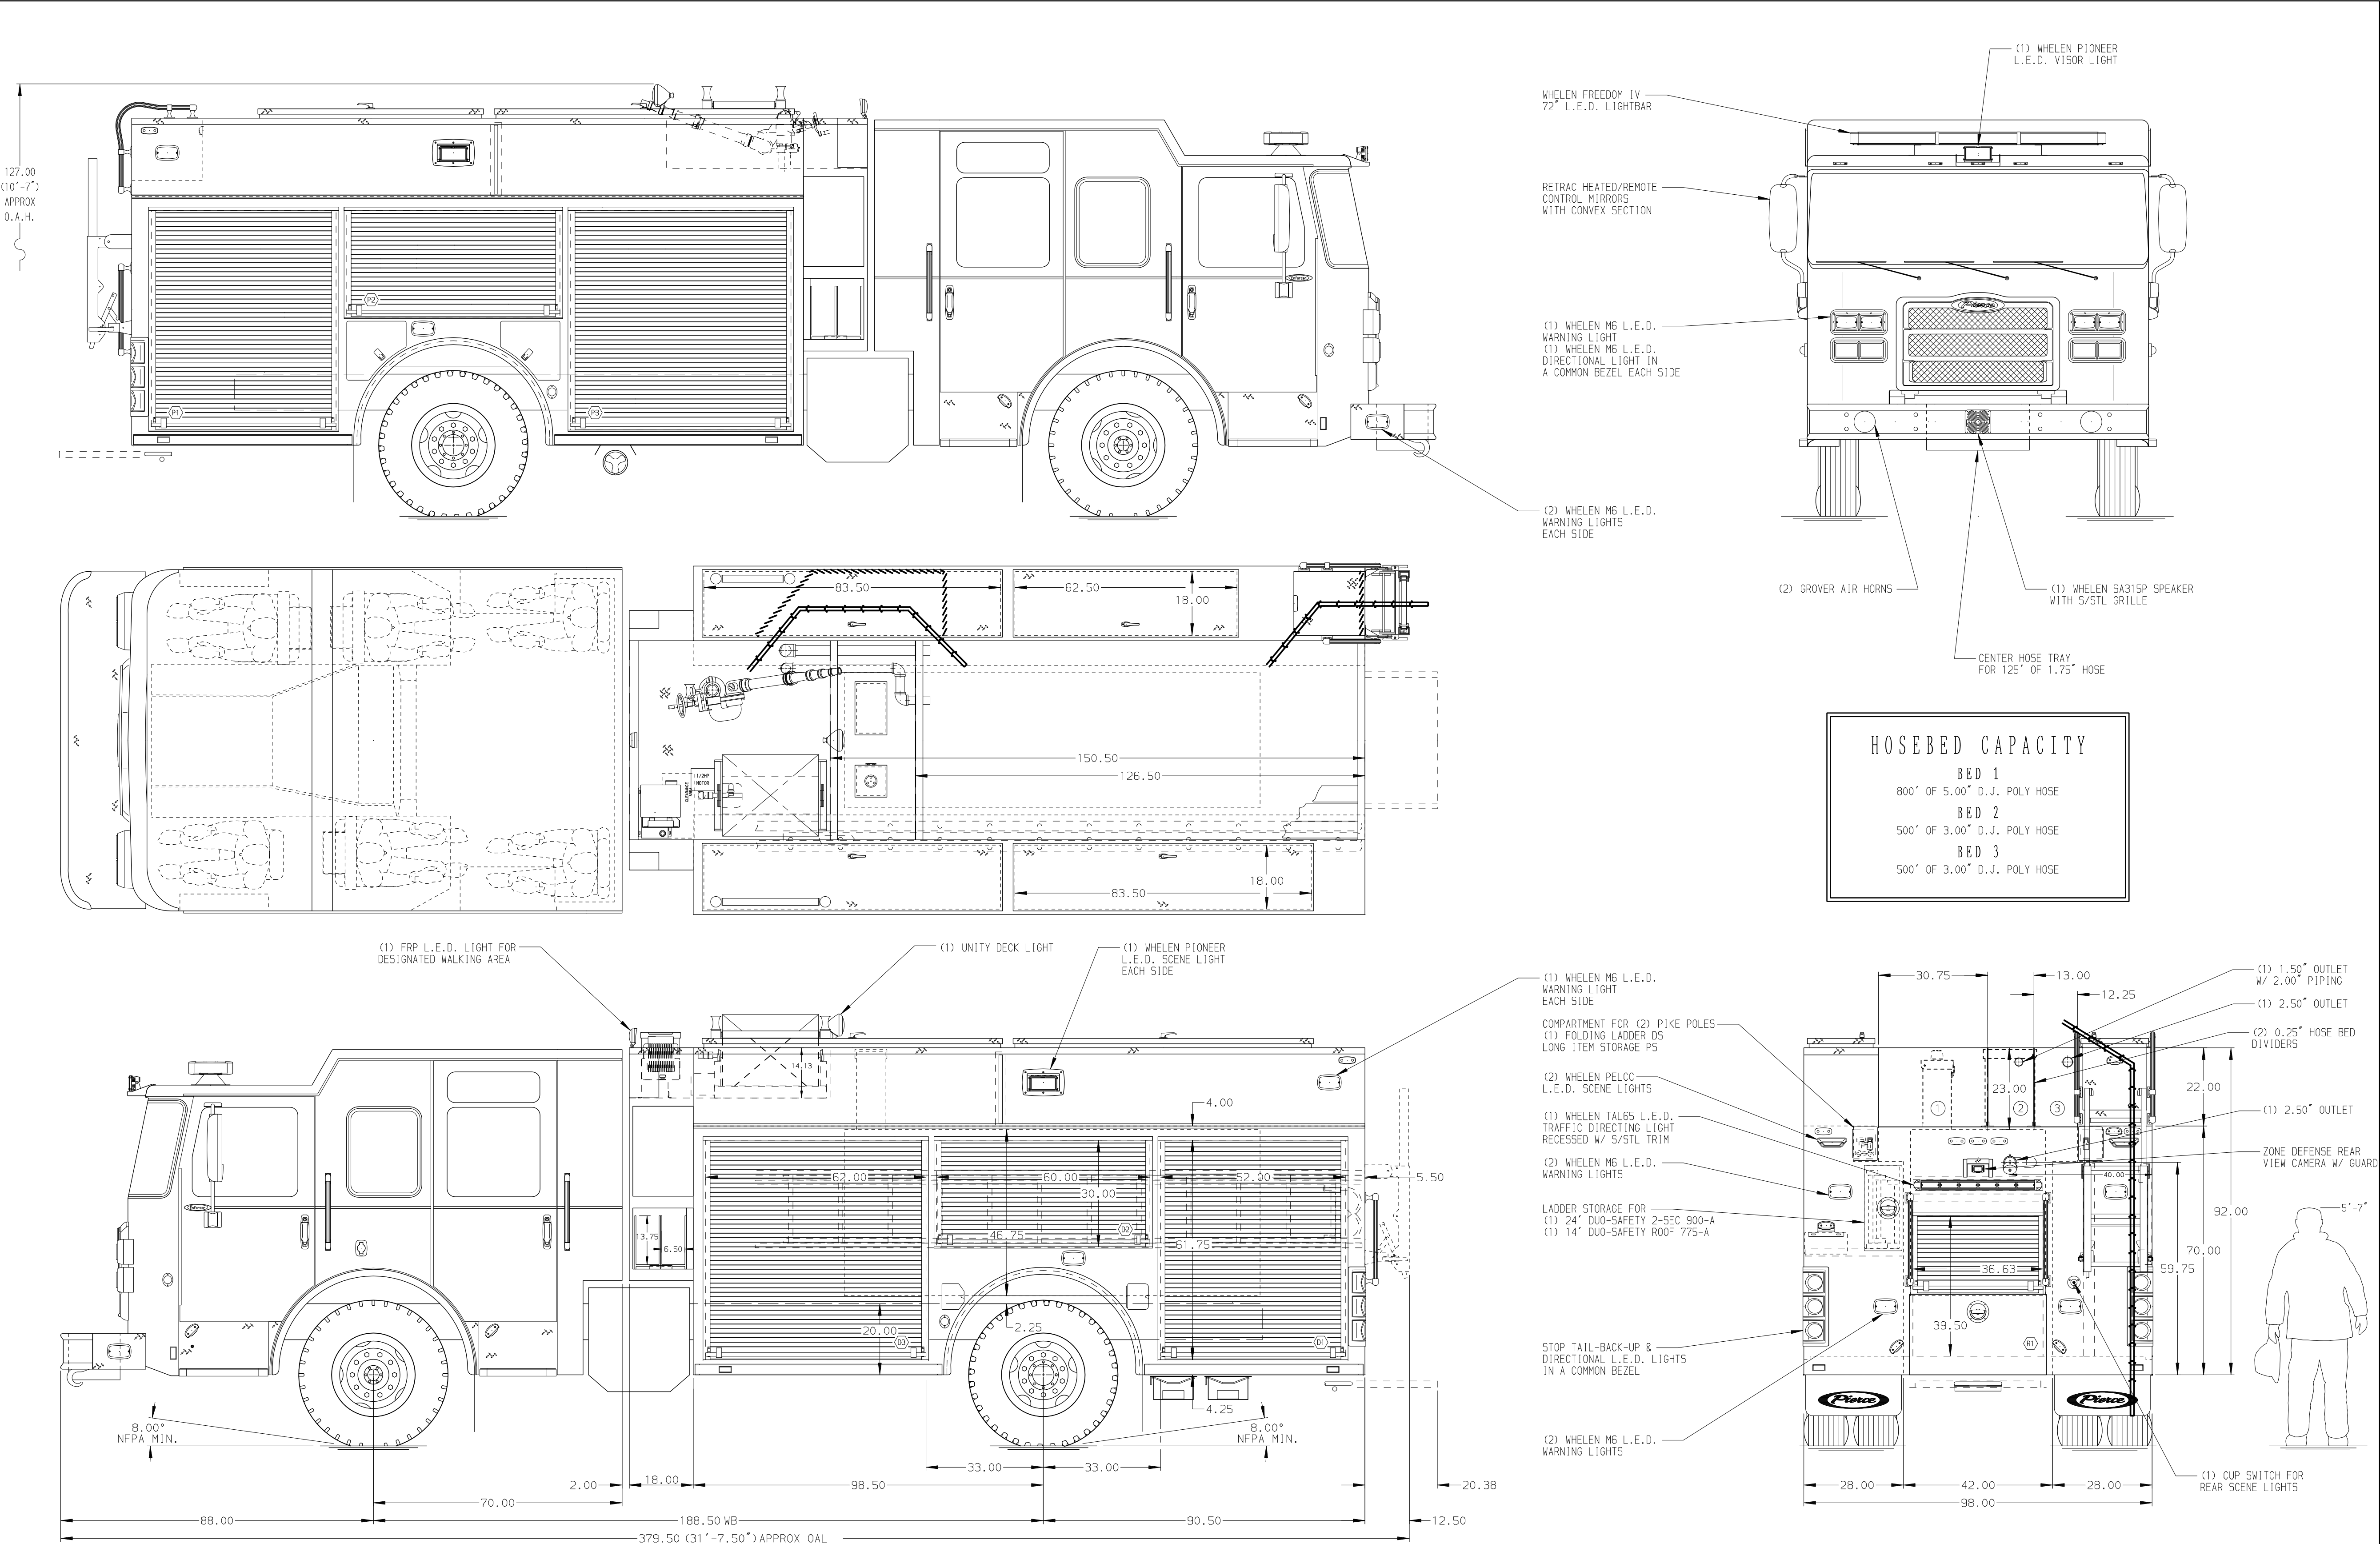

		JOB NO.	31057
MANUFACTURING INC.		SCALE	1:24
		DATE	
		DRAWN BY	COL
		COL	08MAR18
		CHECKED BY	SHE
		SHE	08MAR17
		SHEET SIZE	D
		SHEET NO.	1 OF 1

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing
				MAKE	FOR	-
				PIERCE	FOR	Thatcher Fire Department
				MODEL	DWG NO.	31057AD
				ENFORCER		
REV	DATE	BY	CH			