


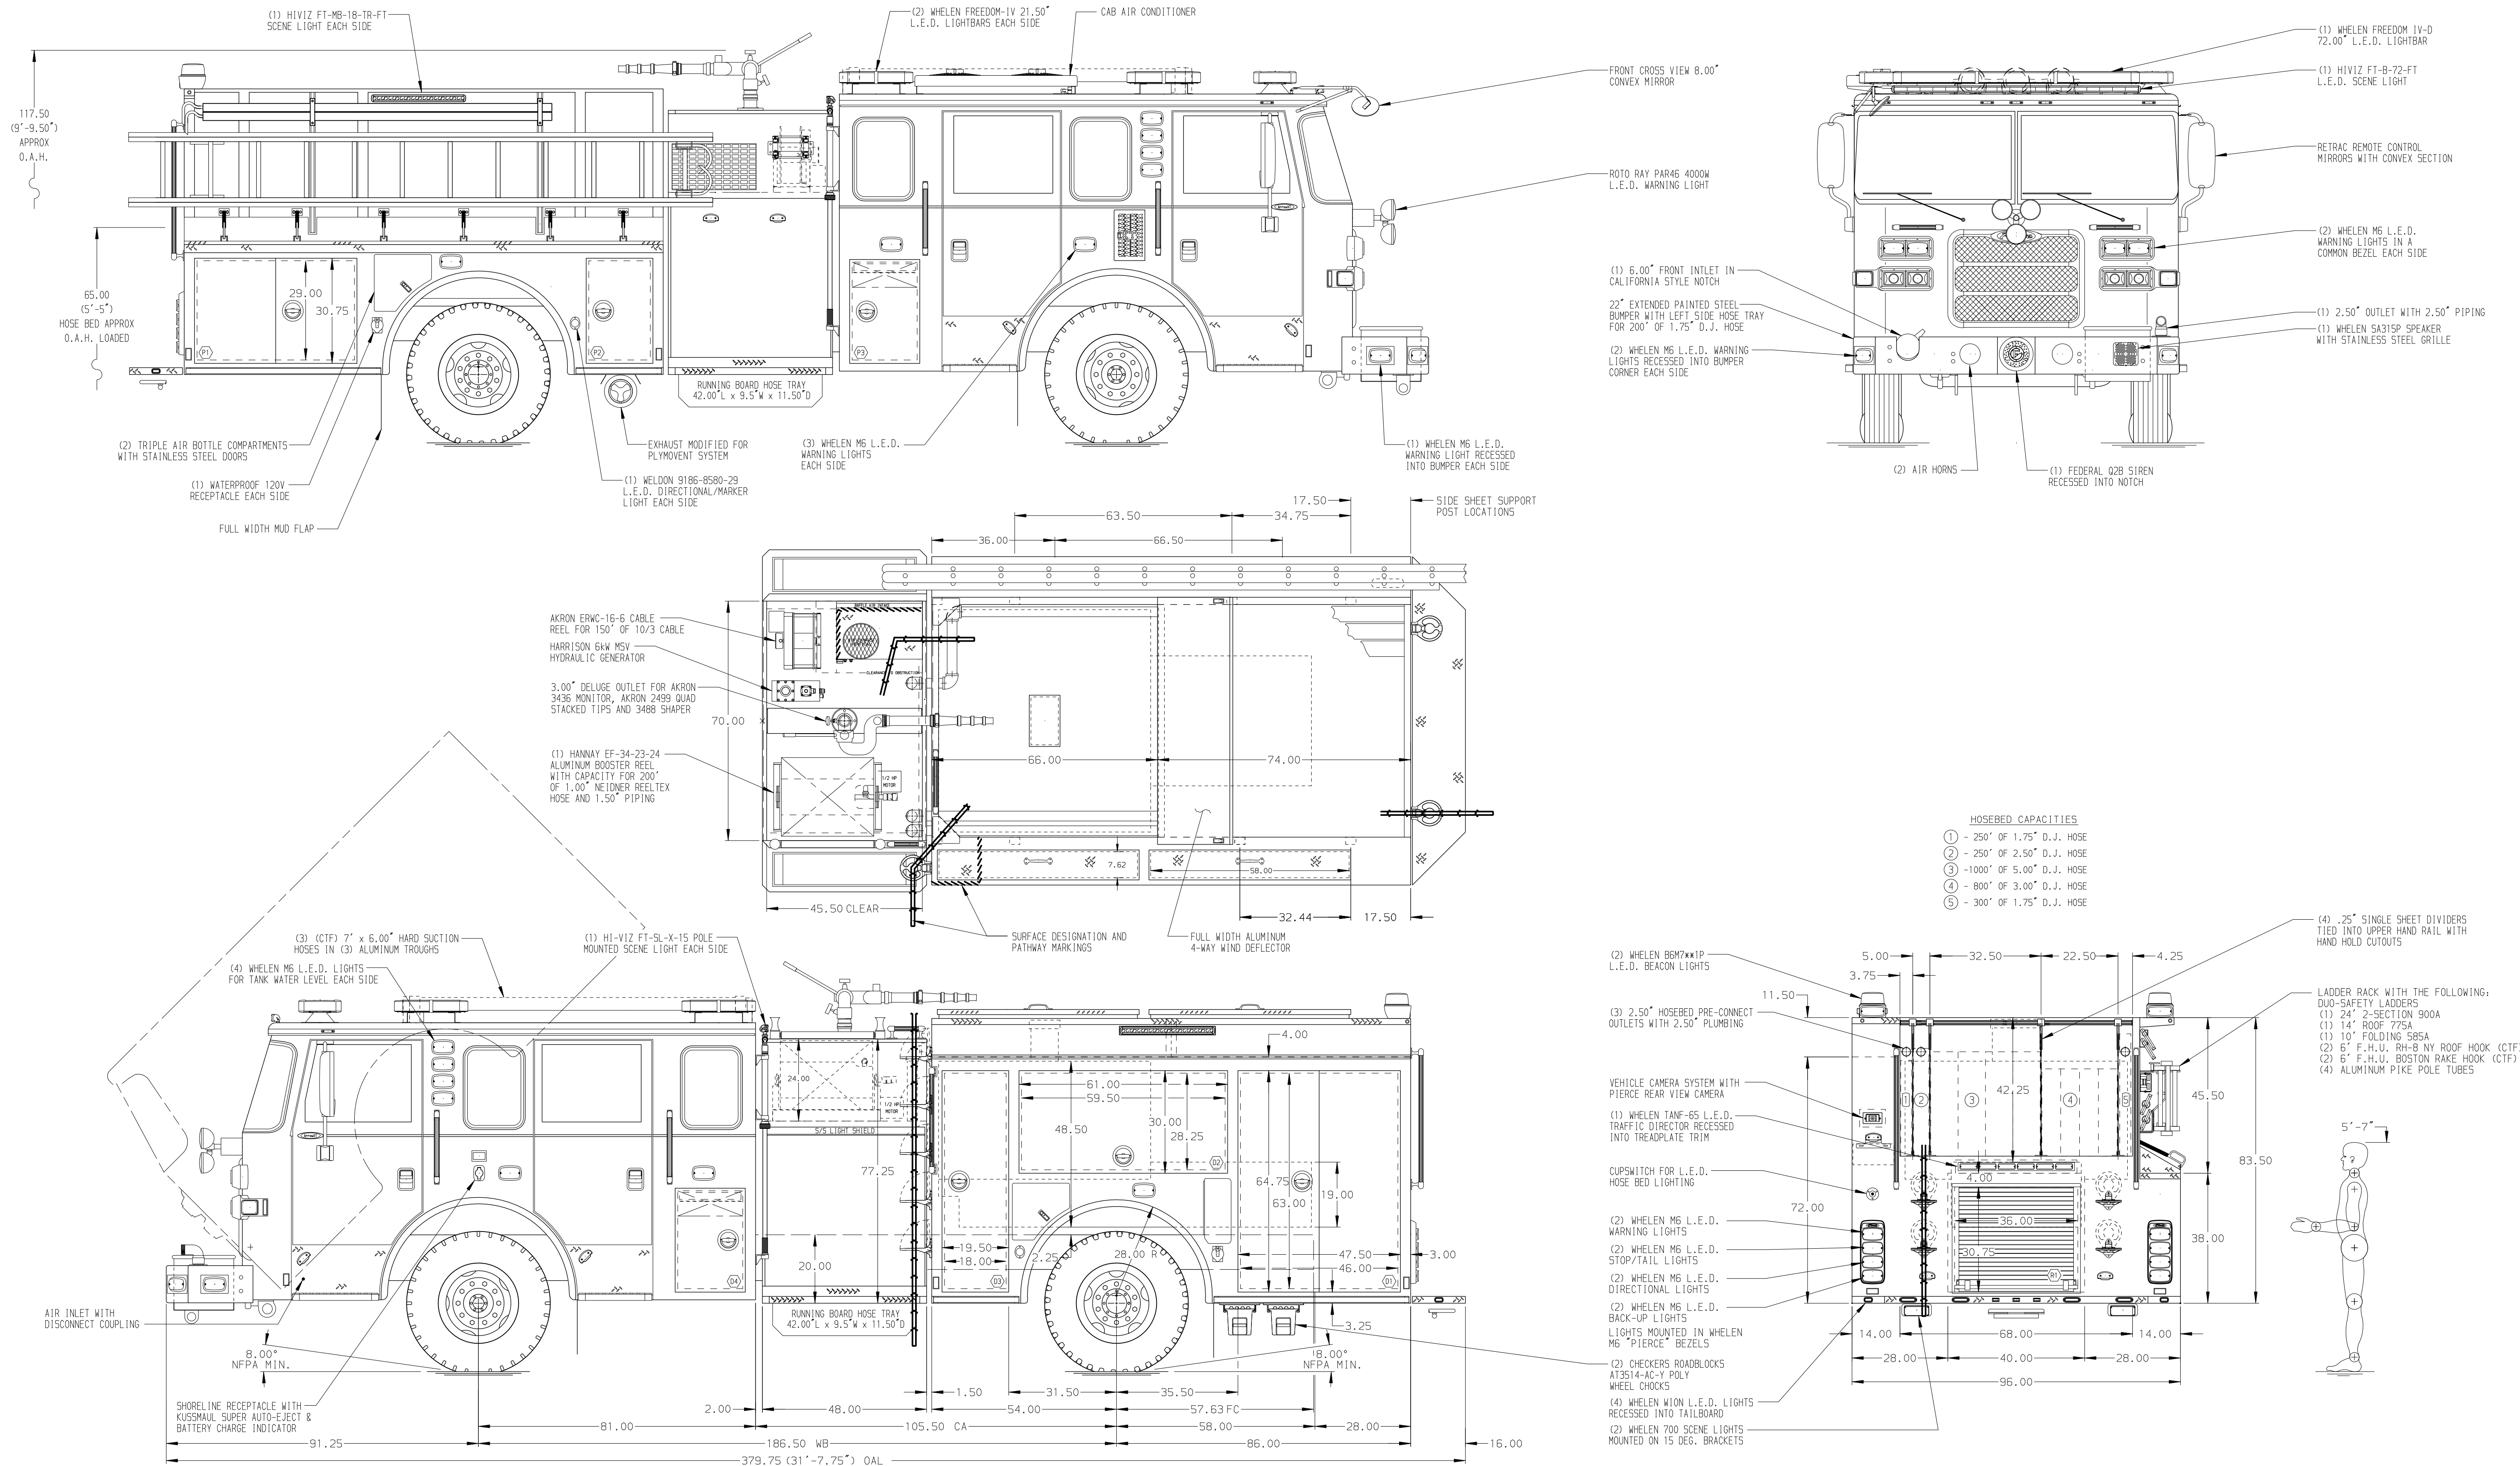

- HOSEBED CAPACITIES
- ① - 250' OF 1.75" D.J. HOSE
 - ② - 250' OF 2.50" D.J. HOSE
 - ③ - 1000' OF 5.00" D.J. HOSE
 - ④ - 800' OF 3.00" D.J. HOSE
 - ⑤ - 300' OF 1.75" D.J. HOSE

ALUMINUM BODY

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- 1. ALUMINUM 4-WAY ON CAB ROOF
- 2. 5/8" S/S PLATE AROUND FUEL FILL OPENING
- 3. REVERSED HINGED DOOR ON COMPARTMENT D3
- 4. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH SIDES IN COMPARTMENTS D1, P1, AND R1
- 5. COMPARTMENT VENT WITH SPLASH GUARD IN COMPARTMENT R1
- 6. ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENT D1, D2, AND D3
- 7. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
- 8. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN COMPARTMENTS D1, D2, AND D3

				CHASSIS DATA
				MAKE
21JUN17	6VH	DT5	PIERCE	MODEL
12MAY17	6VH	TWH	PIERCE	REV
REV	DATE	BY	CH	ARROW XT

	JOB NO.	(01-02) 31117
	SCALE	1:24 DATE
	DRAWN BY	GVH 04APR17
	CHECKED BY	CCA 04APR17
TITLE	1500-D-750P, 140" FH DS WITH HATCH COMPT / LOW PS DELUGE, CABLE REEL, BOOSTER REEL, (3) HSH, A/C	
	FOR SALISBURY FIRE DEPARTMENT SALISBURY, MARYLAND	
DWG NO.	31117AD	
SHEET SIZE	D	SHEET NO. 1 OF 1