

**PUMPER BODY**  
Medium Aluminum 2nd Gen Pumper

**CHASSIS**  
Arrow XT Chassis

**CHASSIS AXLE, FRONT, CUSTOM**  
19,500 Lb Dana Axle

**AXLE, REAR**  
24,000 Lb Meritor Axle

**ENGINE**  
500 HP Cummins ISX12 Engine

**TRANSMISSION**  
Allison 5th Gen, 4500 EVS P

**BUMPER**  
Non-Extended Stainless Steel, Special Length

**CAB**  
6710 Arrow XT Cab

**BODY WATER TANK**  
500 Gallon Poly Water Tank

**COMPT, PUMPER, REAR**  
30.75" FF RollUp Rear Compt

**COMPT, PUMPER, DRIVER SIDE**  
152" RollUp Full Height Front & Rear FDLR

**COMPT, PUMPER PASS. SIDE**  
152" RollUp Full Height Front & Rear FDLR

**FIRE SUPPRESSION PUMPHOUSE**  
45" Side Mount

**PUMP**  
1500 GPM Waterous CSU

**CROSSLAYS, 1.50"**  
(2) 1.50" Standard Capacity

**CROSSLAYS, 2.50"**  
2.50" Crosslays Not Required


**SPEEDLAYS**  
Speedlays Not Required

**GENERATOR**  
Generator Not Required

**Foam System**  
Husky 3 Single Agent Foam System

**Foam Cell**  
25 Gallon Foam Cell, Not Reduced Water

**NOTE**  
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

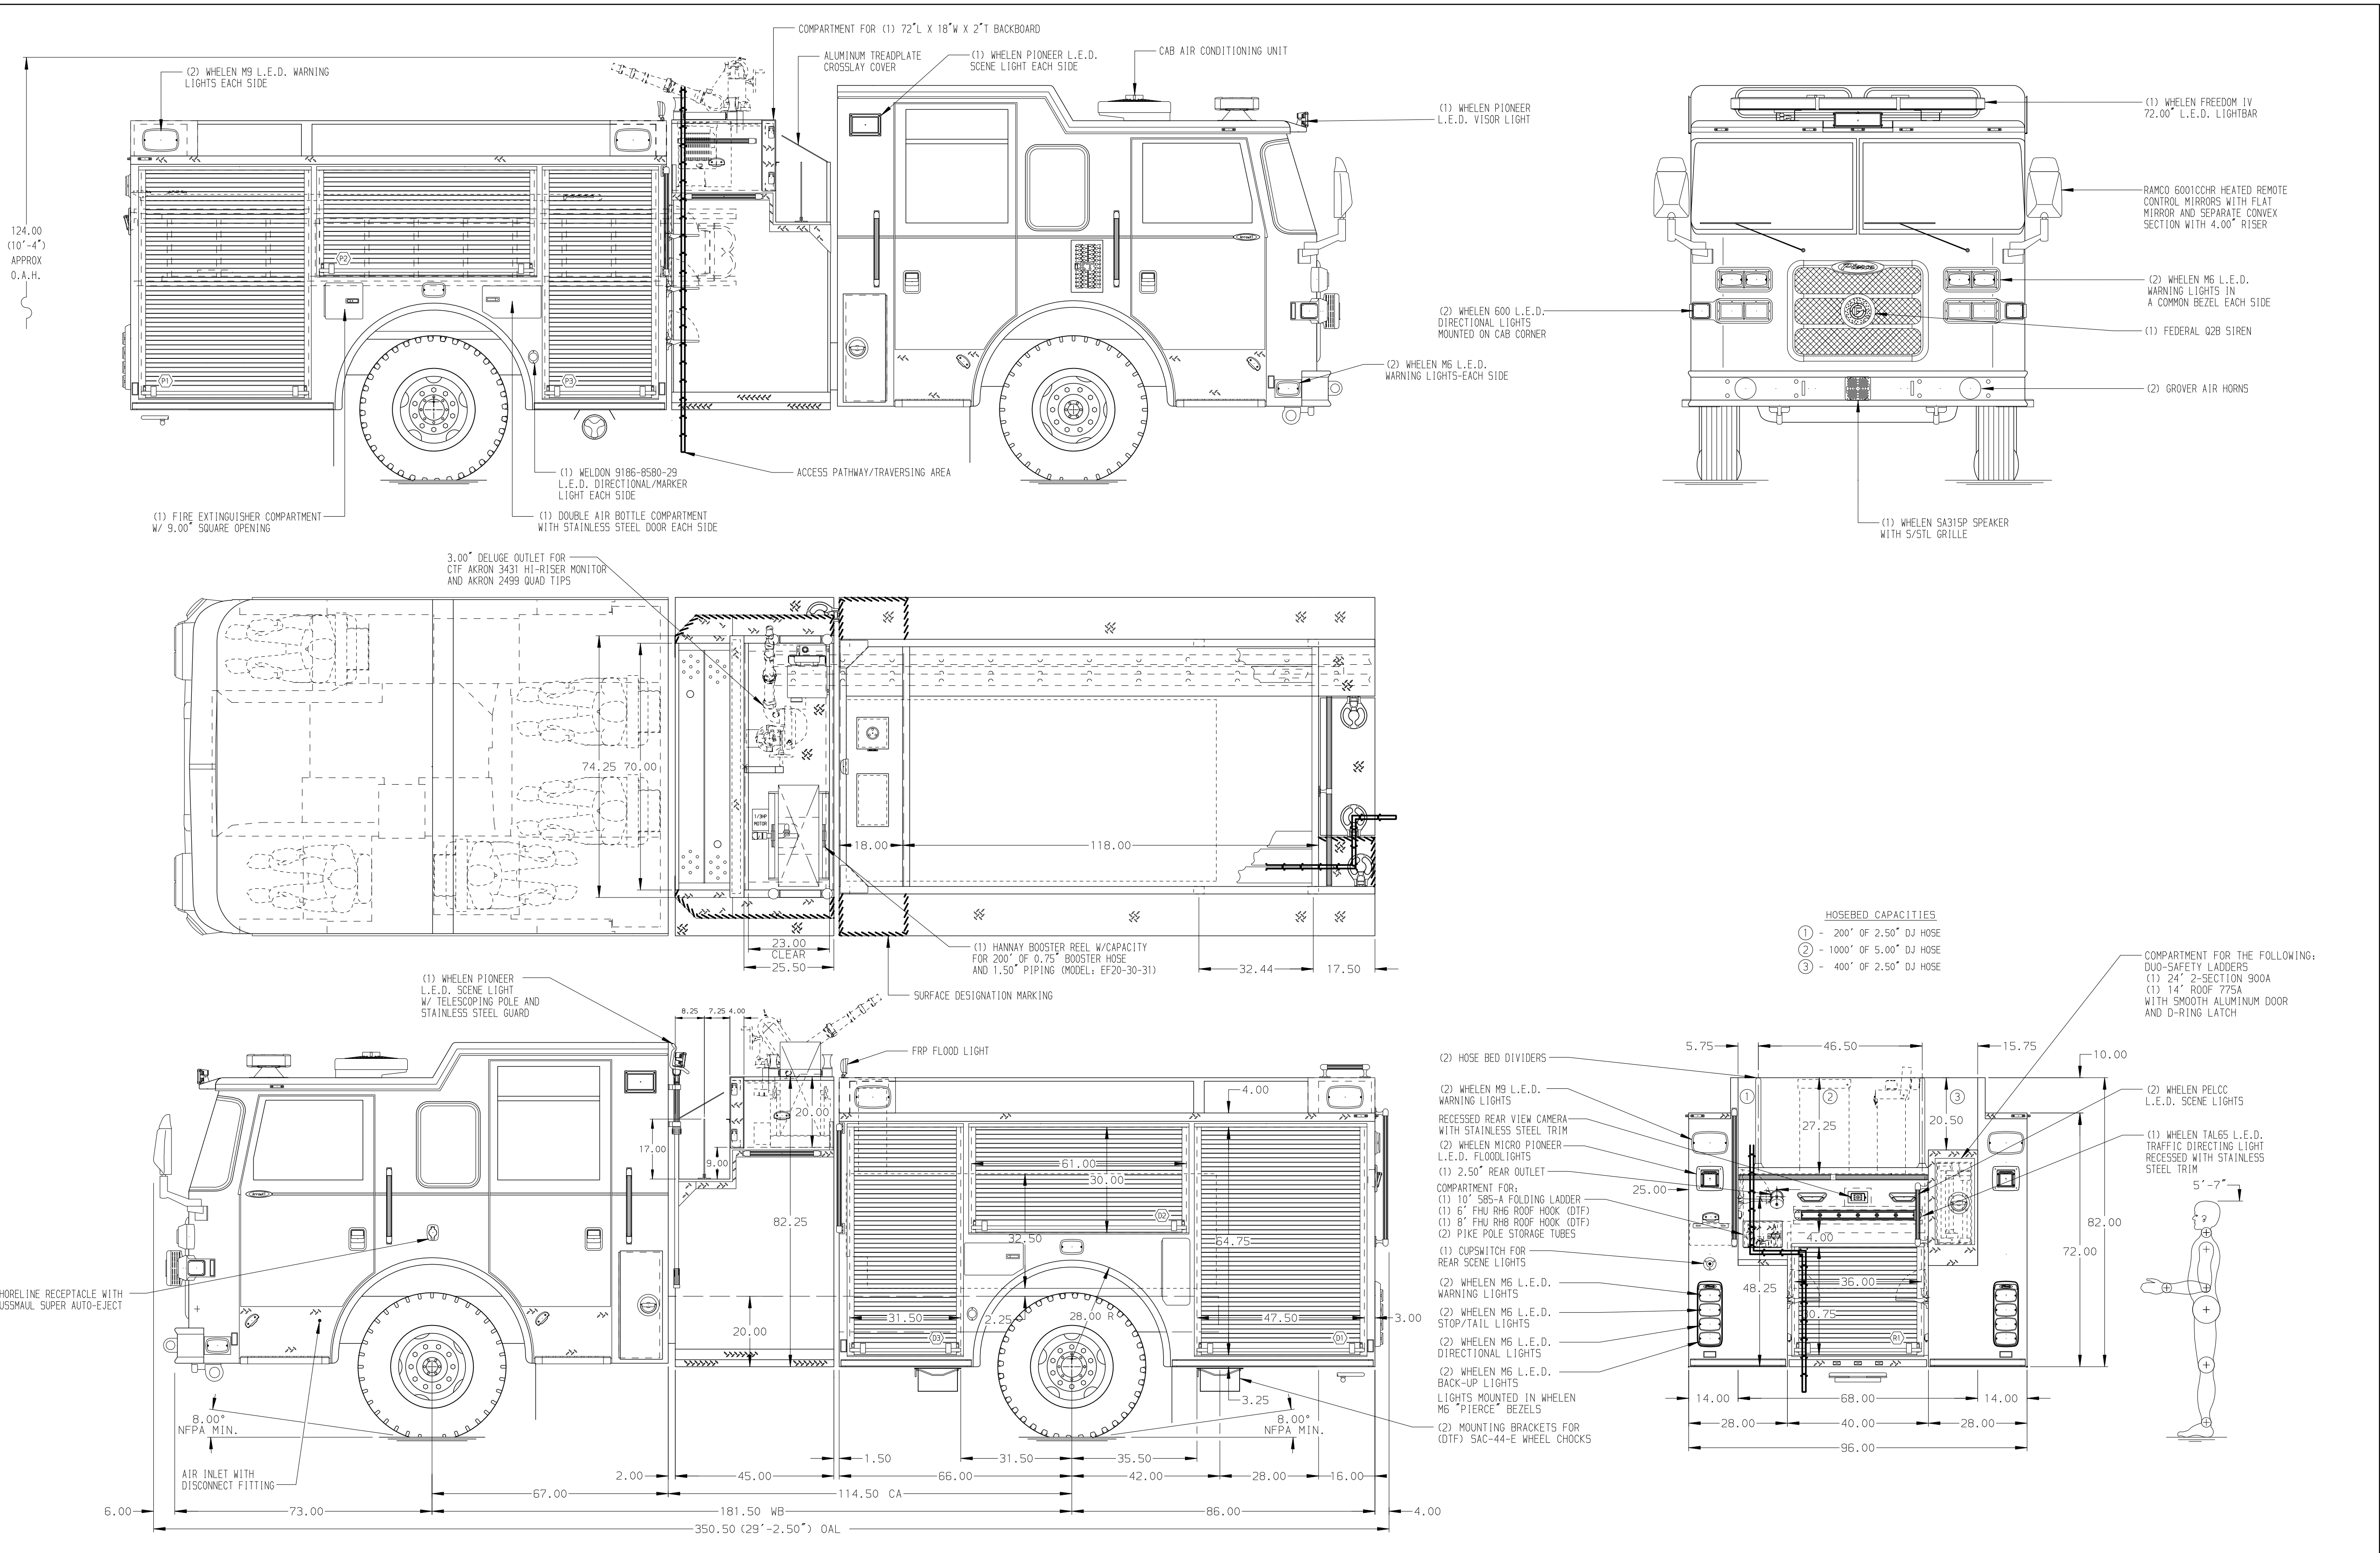

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
3. BATTERY CHARGE INDICATOR LOCATED NEAR D.S. SEAT RISER WITH BRACKET
4. ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENT D2, P2, R1, TWO IN D1, P1, THREE IN D3, P3
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT R1 & D1
6. AIR OUTLET AT DS PUMP PANEL

REV	DATE	BY	CH	ARROW XT
17JUN17	COL	JGO		
15MAY17	COL	JGO		

		JOB NO.	31188
		SCALE	01-02
<b>MANUFACTURING INC.</b>		DATE	
		DRAWN BY	COL
<b>TITLE</b> 1500-D-525P, 500G WATER, 25G FOAM, 152" FDLR BODY (2) X-LAYS, BOOSTER REEL, DELUGE, HUSKY 3		CHECKED BY	JGO
		DATE	15MAR17
<b>FOR</b> TUSCALOOSA FIRE RESCUE SERVICE TUSCALOOSA, ALABAMA		SHEET SIZE	D
		SHEET NO.	1 OF 1
<b>DWG NO.</b> 31188AD			