


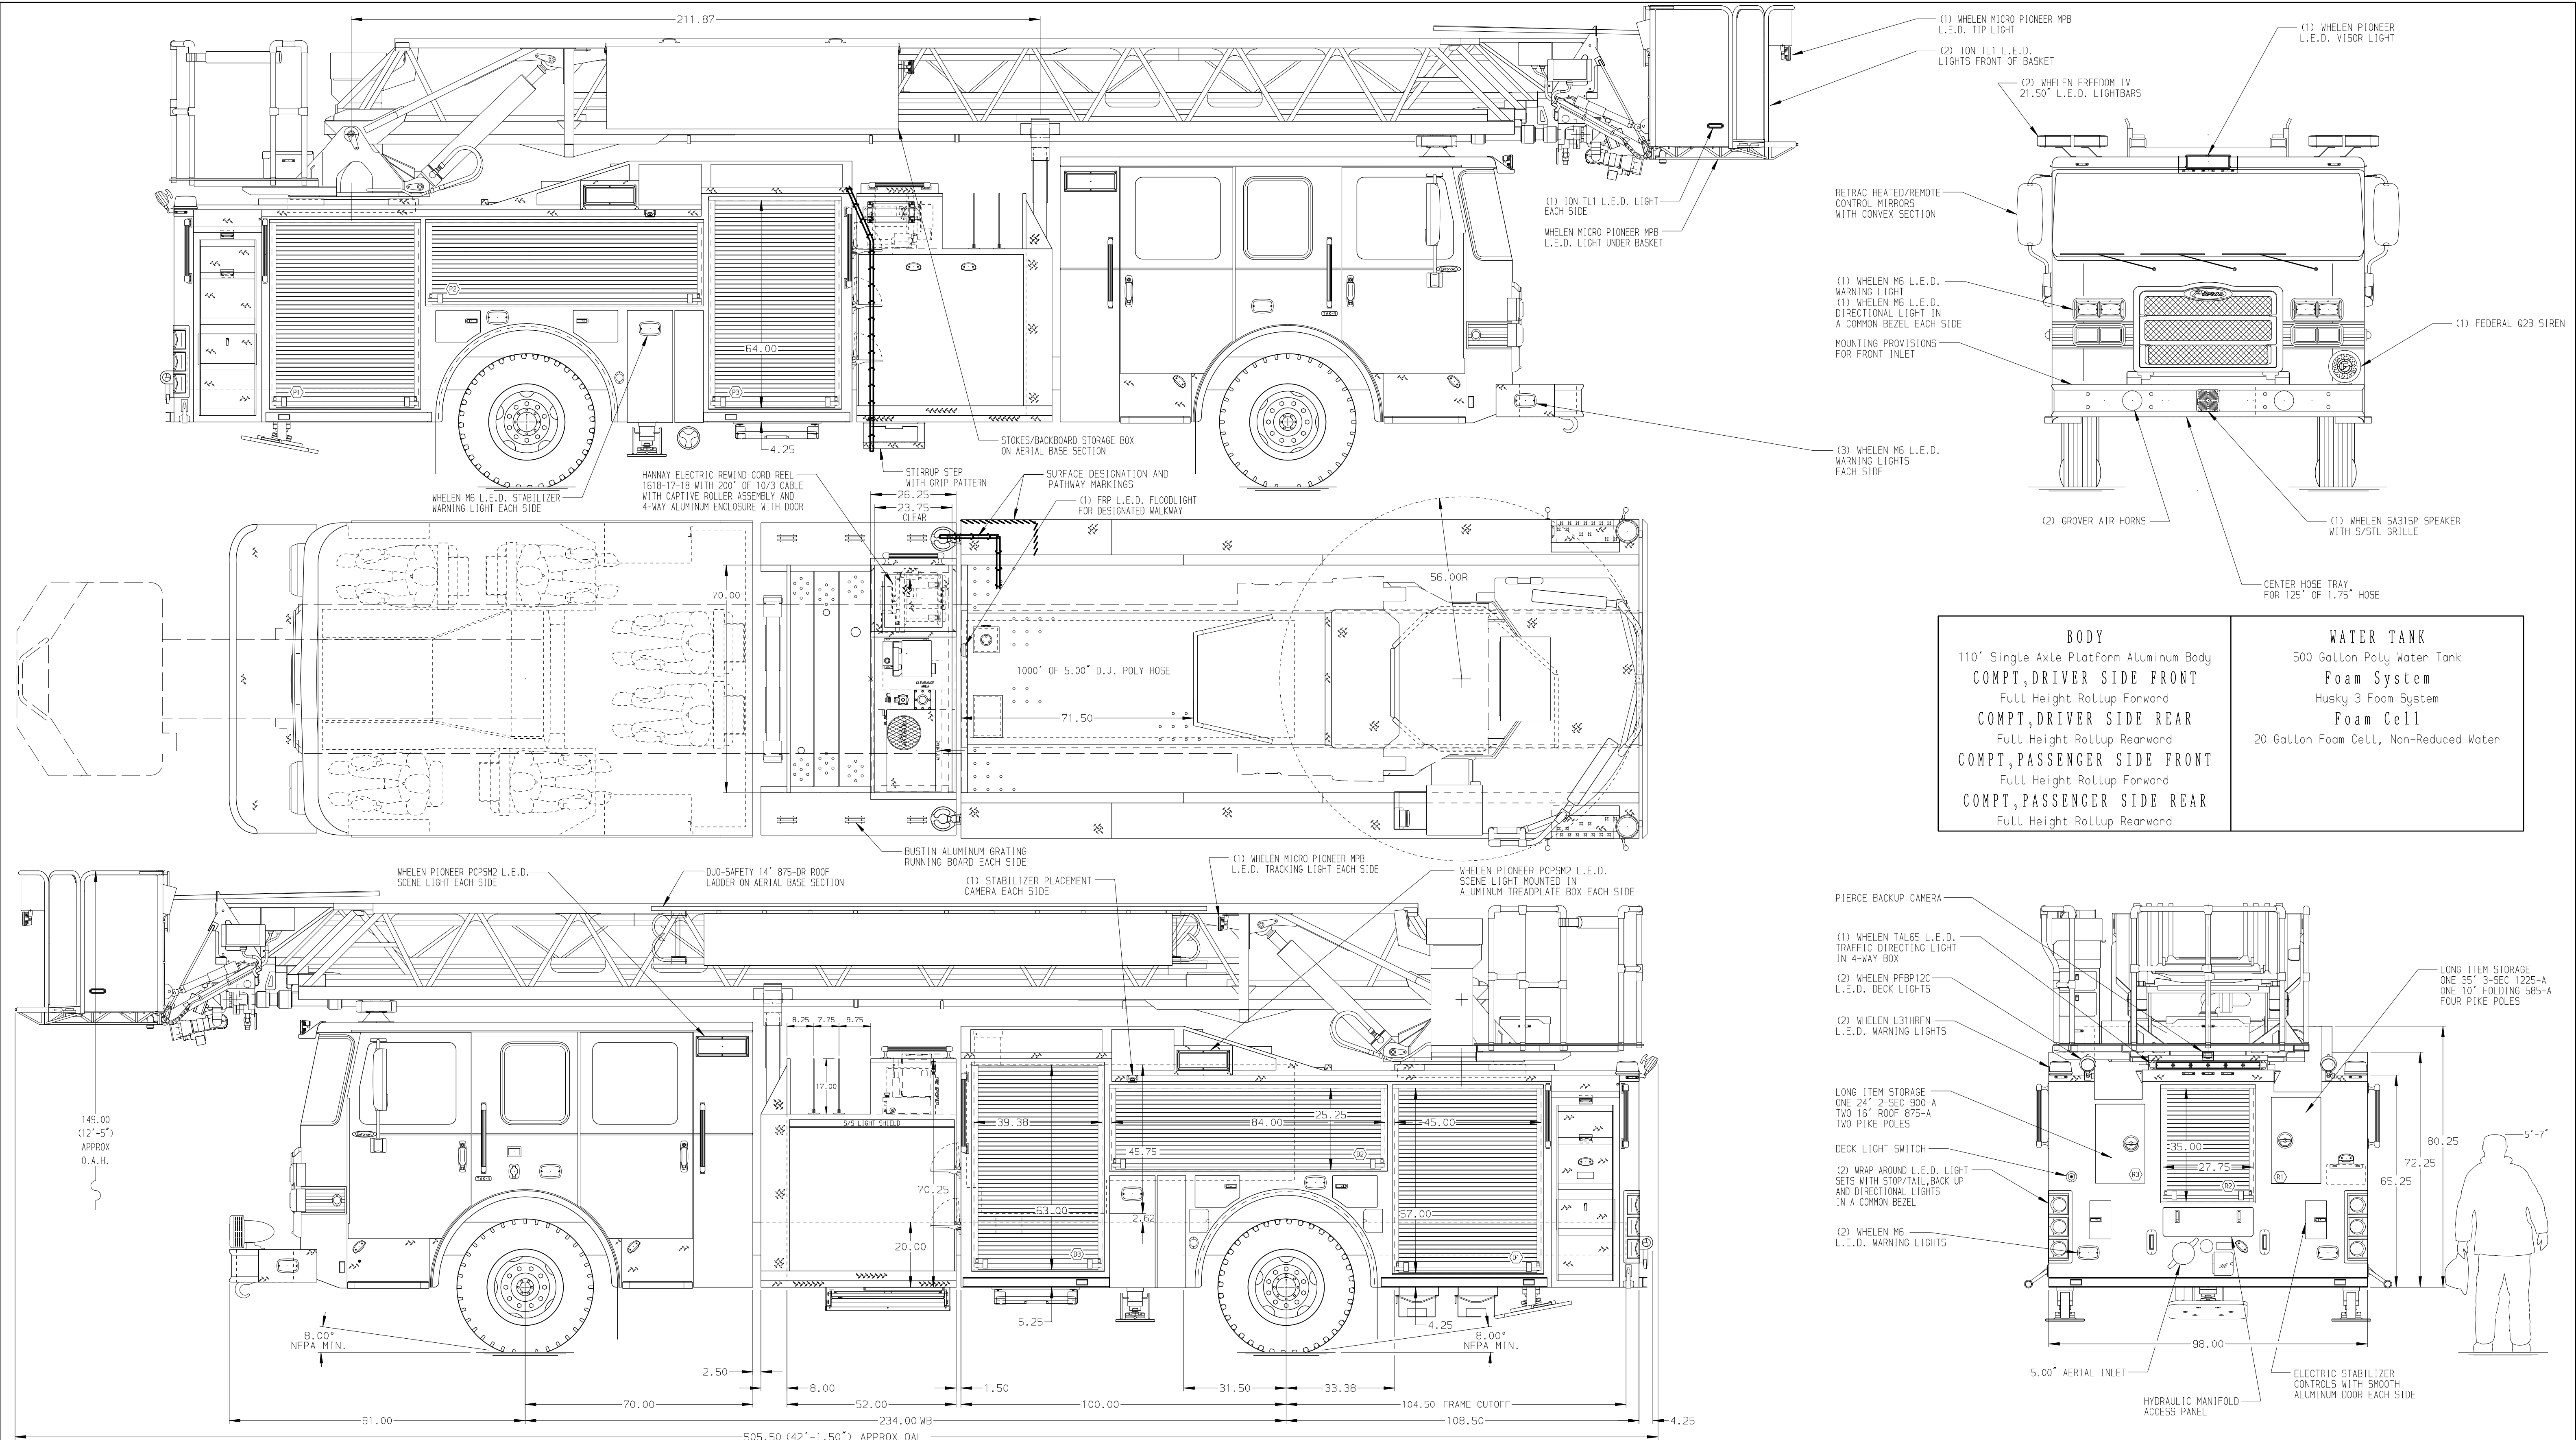

BODY 110' Single Axle Platform Aluminum Body COMPT, DRIVER SIDE FRONT Full Height Rollup Forward COMPT, DRIVER SIDE REAR Full Height Rollup Rearward COMPT, PASSENGER SIDE FRONT Full Height Rollup Forward COMPT, PASSENGER SIDE REAR Full Height Rollup Rearward	WATER TANK 500 Gallon Poly Water Tank Foam System Husky 3 Foam System Foam Cell 20 Gallon Foam Cell, Non-Reduced Water
--	--

CHASSIS Enforcer Chassis ENGINE 525 HP DD13 Engine	CAB 7000 Enforcer Cab BUMPER 22" Extended Stainless Steel	AXLE, FRONT, CUSTOM 24,000 Lb TAK-4 Axle AXLE, REAR 33,500 Lb Meritor Axle	TRANSMISSION Allison 5th Gen, 4500 EVS P	PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	SPEEDLAYS Speedlays Not Required GENERATOR Harrison 6kW MSV, Hydraulic	
---	--	---	--	---	--	---	--

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED LOCATED BEHIND DRIVER SEAT
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE OF THE CAB
- SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
- FOUR FLOOR MOUNTED SLIDE-OUT TRAYS IN COMPARTMENTS PER SHOP ORDER
- PLUMBING FOR FUTURE HUSKY 3/12 FOAM SYSTEM PER SHOP ORDER
- CIRCUIT BREAKER PANEL IN COMPARTMENT 03
- NON-RAISED AERIAL PEDESTAL
- 1250 GPM HIGH FLOW WATERWAY
- L.E.D. LIGHTING ON AERIAL LADDER SECTIONS

				CHASSIS DATA
				MAKE
				PIERCE
				MODEL
				ENFORCER
REV	DATE	BY	CH	

	JOB NO.	31579
	SCALE	1:24
	DATE	
TITLE	110' ASCENDANT AERIAL PLATFORM AND BODY ASSEMBLY	
FOR	PIERCE FIELD UNIT APPLETON, WISCONSIN	
DWG NO.	31579AD	
	DRAWN BY	TKA
	CHECKED BY	GRM
	SHEET SIZE	D
	SHEET NO.	1 OF 1