


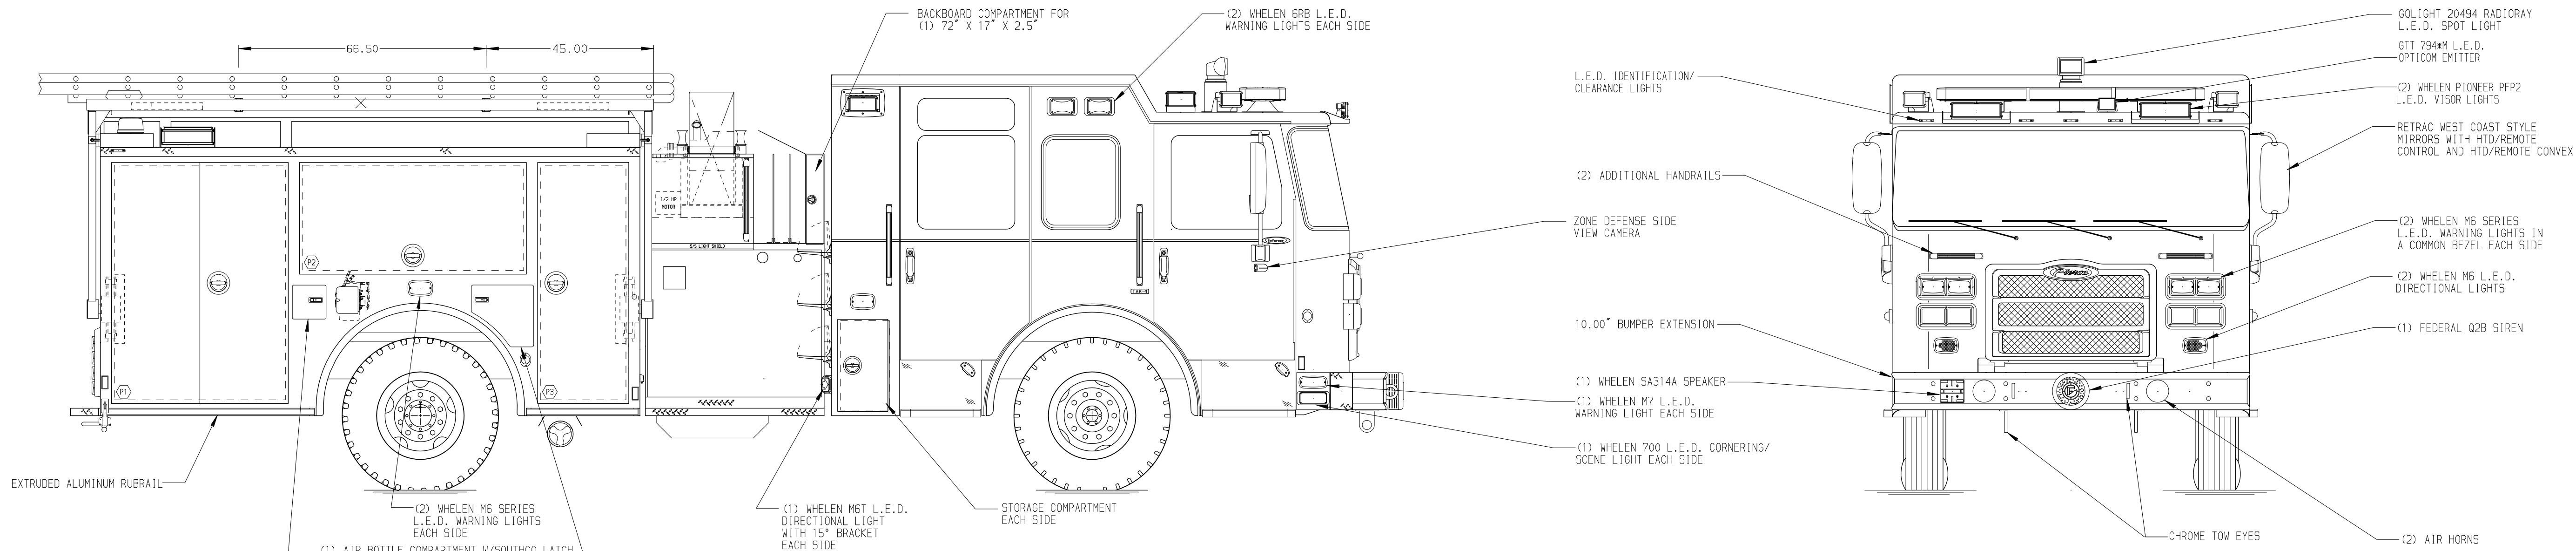


TORX HEAD SCREWS

NUTCERTS

COMPRESSION FITTINGS

- HOSEBED CAPACITIES
- ① 200' OF 1.75" D.J. POLY HOSE
 - ② 600' OF 2.50" D.J. POLY HOSE ON TOP
 - ③ 600' OF 3.00" D.J. POLY HOSE
 - ④ 600' OF 3.00" D.J. POLY HOSE

- HYDRAULIC LADDER RACK W/ AIR CLAMPS AND WHELEN 500 SERIES L.E.D. WARNING LIGHT WITH DUO- SAFETY LADDERS:
- (1) 24' 2-SECTION 900A
 - (1) 14' ROOF 775A
 - (1) 10" FOLDING 585A
 - (1) 10" NUPLA YPDH-10 PIKE POLE
 - (1) 6" NUPLA YPDH-6A PIKE POLE

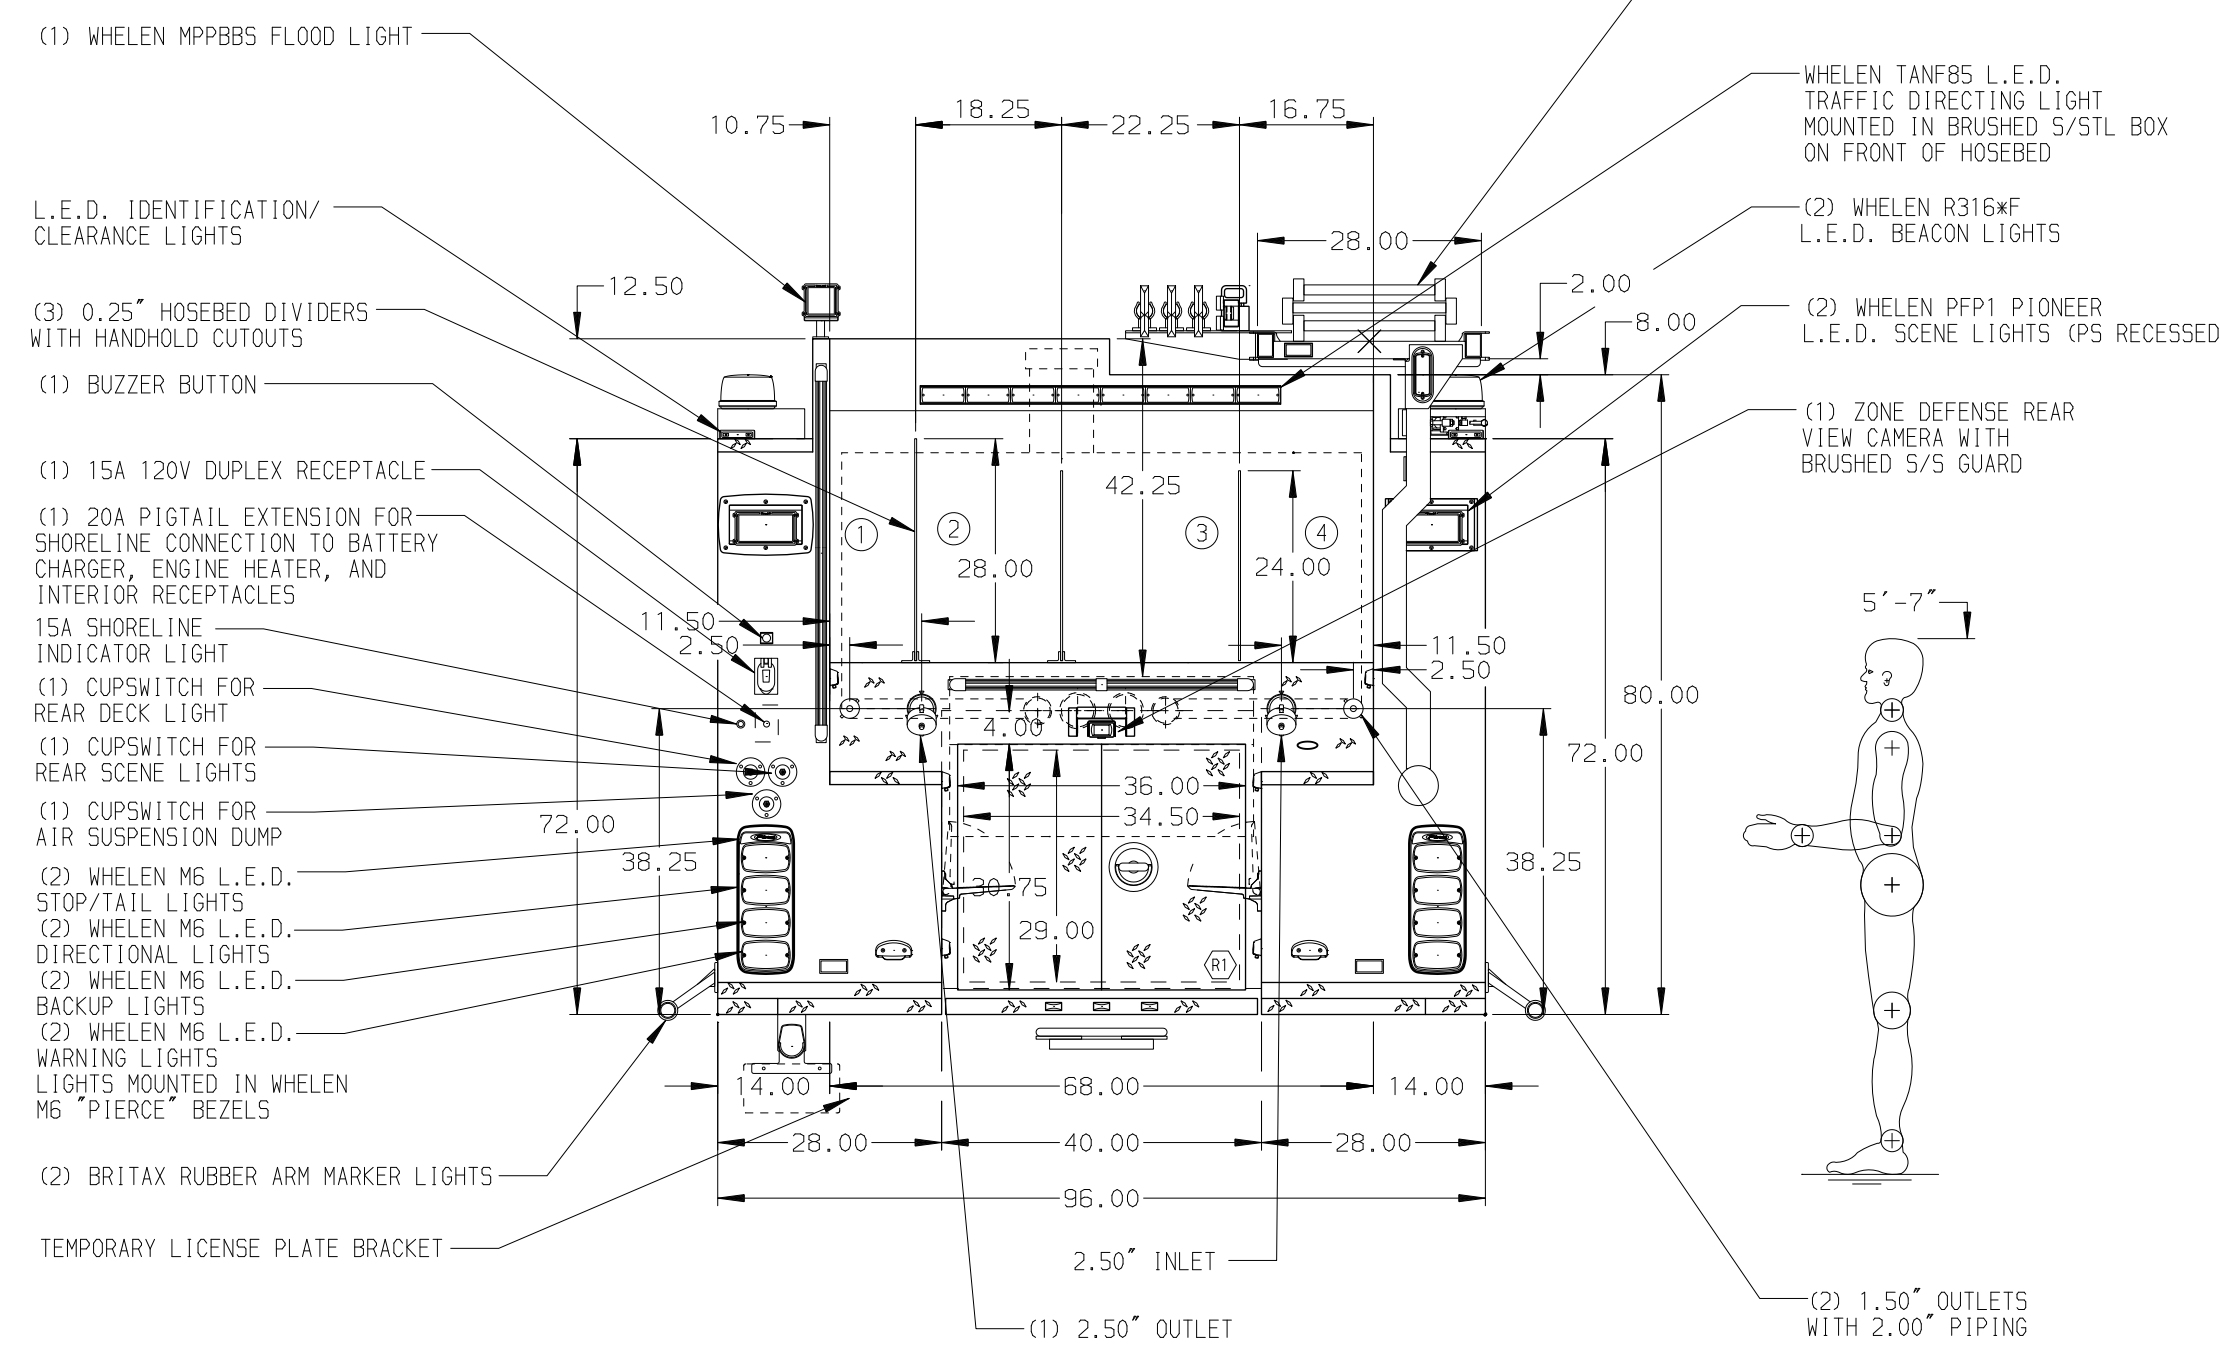

ALUMINUM BODY

MAXIMUM O.A.H. 120.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- 1. BRUSHED S/S SCUFFPLATE LOCATED AT EACH CAB DOOR JAMB
- 2. (CTF) MUDFLAPS LOCATED FRONT AND REAR
- 3. S/STL FENDER CROWNS LOCATED FRONT AND REAR
- 4. IOTA BATTERY CHARGER W/ 5/STL COVER LOCATED BEHIND DRIVERS SEAT
- 5. PULL STRAPS FOR COMPARTMENT DOORS D2 & P2
- 6. BRUSHED S/S SCUFFPLATE LOCATED ON REAR CAB CORNERS
- 7. 3M POLY SCUFFTAPE LOCATED ON ALL AIR BOTTLE COMPARTMENT OPENINGS
- 8. ONE ADJ FULL WIDTH/DEPTH SHELF W/SQUARE CORNERS IN COMPARTMENTS P1 AND P2; TWO IN D3
- 9. TWO ADJ FULL WIDTH/DEPTH SHELF W/SQUARE CORNERS AND 1" FRONT IN COMPARTMENT D1; THREE IN P3
- 10. CTF WHEEL CHOCKS AND BRACKETS

- 11. ONE SWING-OUT ALUMINUM TOOLBOARD IN COMPARTMENT D2
- 12. BRUSHED S/S ON FRONT COMPARTMENT BULKHEADS
- 13. BRUSHED S/S SCUFFPLATES ON EACH INTERIOR BODY COMPARTMENT DOOR PAN
- 14. BRUSHED S/S SCUFFPLATES ON FRONT AND SIDES OF HOSEBED WALLS
- 15. BRUSHED S/S SCUFFPLATES ON BOTTOM DOOR FRAMES OF D1, D2, D3, P1, P2, P3 & R1
- 16. BRUSHED S/S SCUFFPLATED LOCATED ON FRONT AND REAR WALLS OF BACKBOARD COMPARTMENT
- 17. PEGBOARD WITH TRACKS ON REAR WALL OF COMPARTMENT D2
- 18. 1000W IMMERSION HEATER
- 19. "U" SHAPED ALUMINUM 4-WAY LOCATED ON CREW CAB ROOF
- 20. COMPARTMENT VENTILATION SYSTEM

- 21. (1) 120V 15A DUPLEX SHORELINE RECEPTACLE BEHIND OFFICER SEAT
- 22. DOOR FRAME HINGE REINFORCEMENT LOCATED ON EACH BODY COMPARTMENT
- 23. 135LB GAS CYLINDERS ON DOORS IN COMPARTMENTS D2 & P2
- 24. DOORS TO OPEN PAST 90 DEGREES IN COMPARTMENTS D2 & P2
- 25. SHELF TRACKS LOCATED IN COMPARTMENTS D1, D3, P1, P2, & P3

		JOB NO.	31695
		SCALE	1:24
		DATE	
		DRAWN BY	AMI
		CHECKED BY	SMA
		SHEET SIZE	SHEET NO.
		D	1 OF 1

TITLE	1500-D-500 GAL POLY W/50 GAL FOAM CELL, 145" FDLER
FOR	(3) XLAYS, DELUGE, BOOSTER REEL, HYD. LADDER RACK
DWG NO.	31695AD

REV	DATE	BY	CH	ENFORCER
18DEC17		AMI	SHA	MAKE
17NOV17		JWO	SHA	PIERCE
22SEP17		AMI	SHA	MODEL