

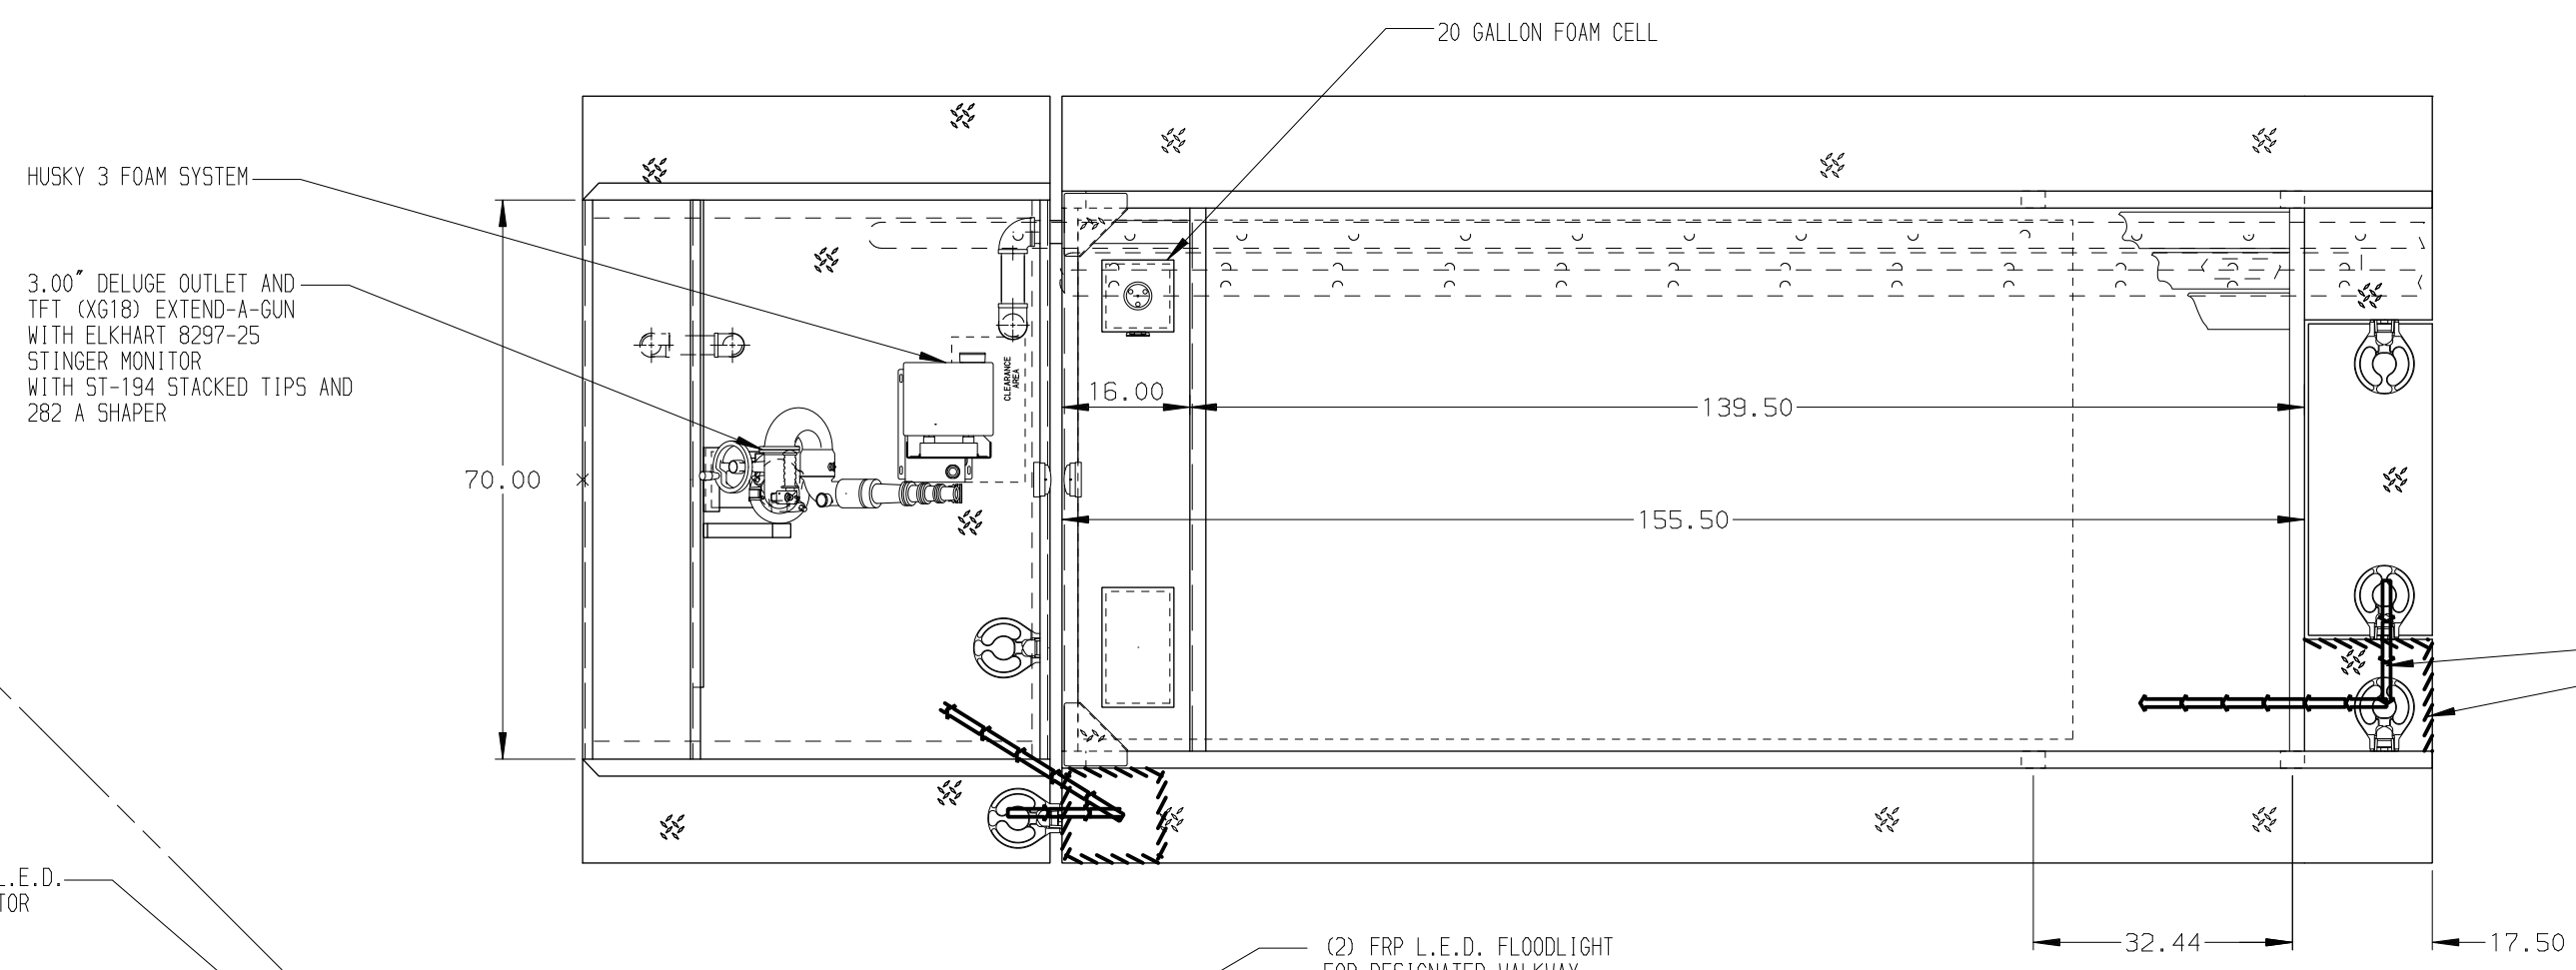
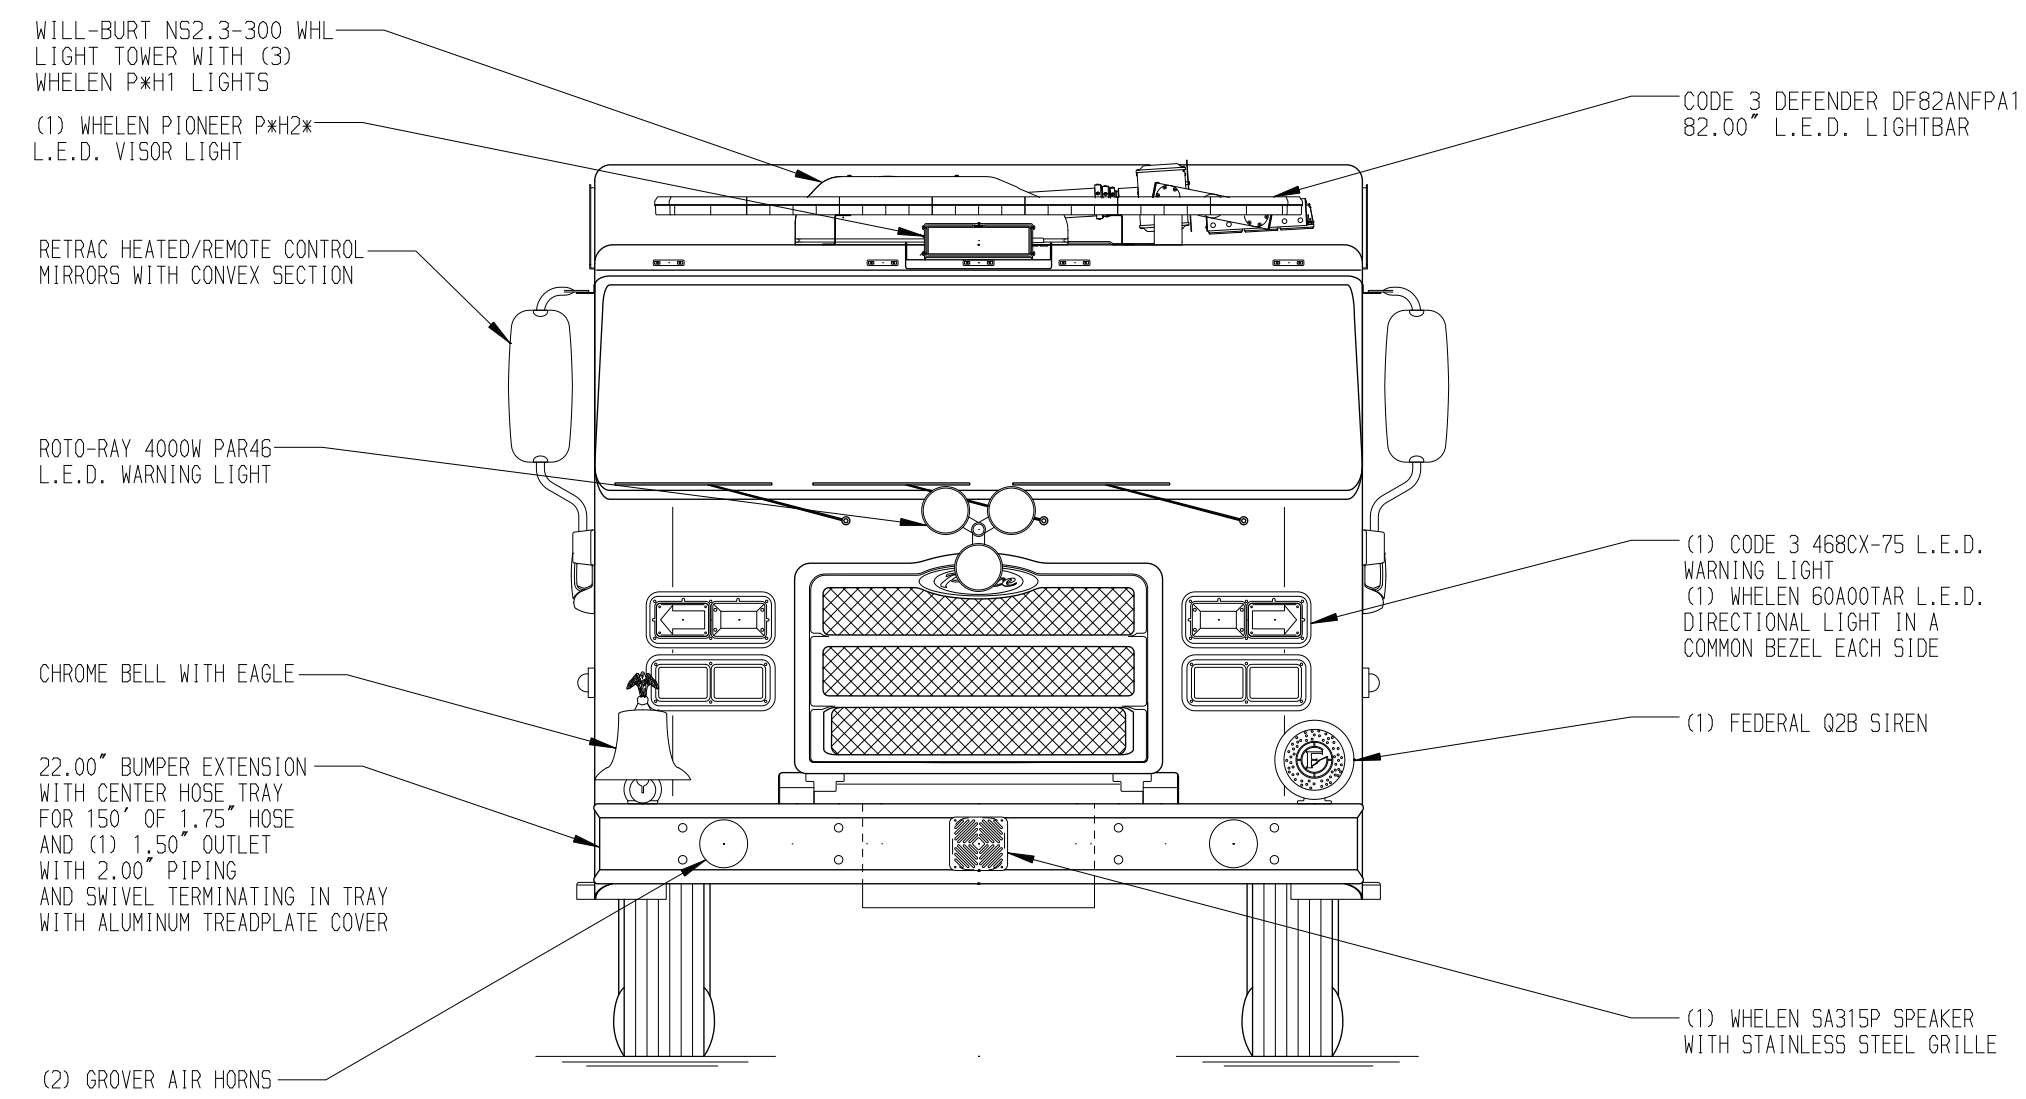
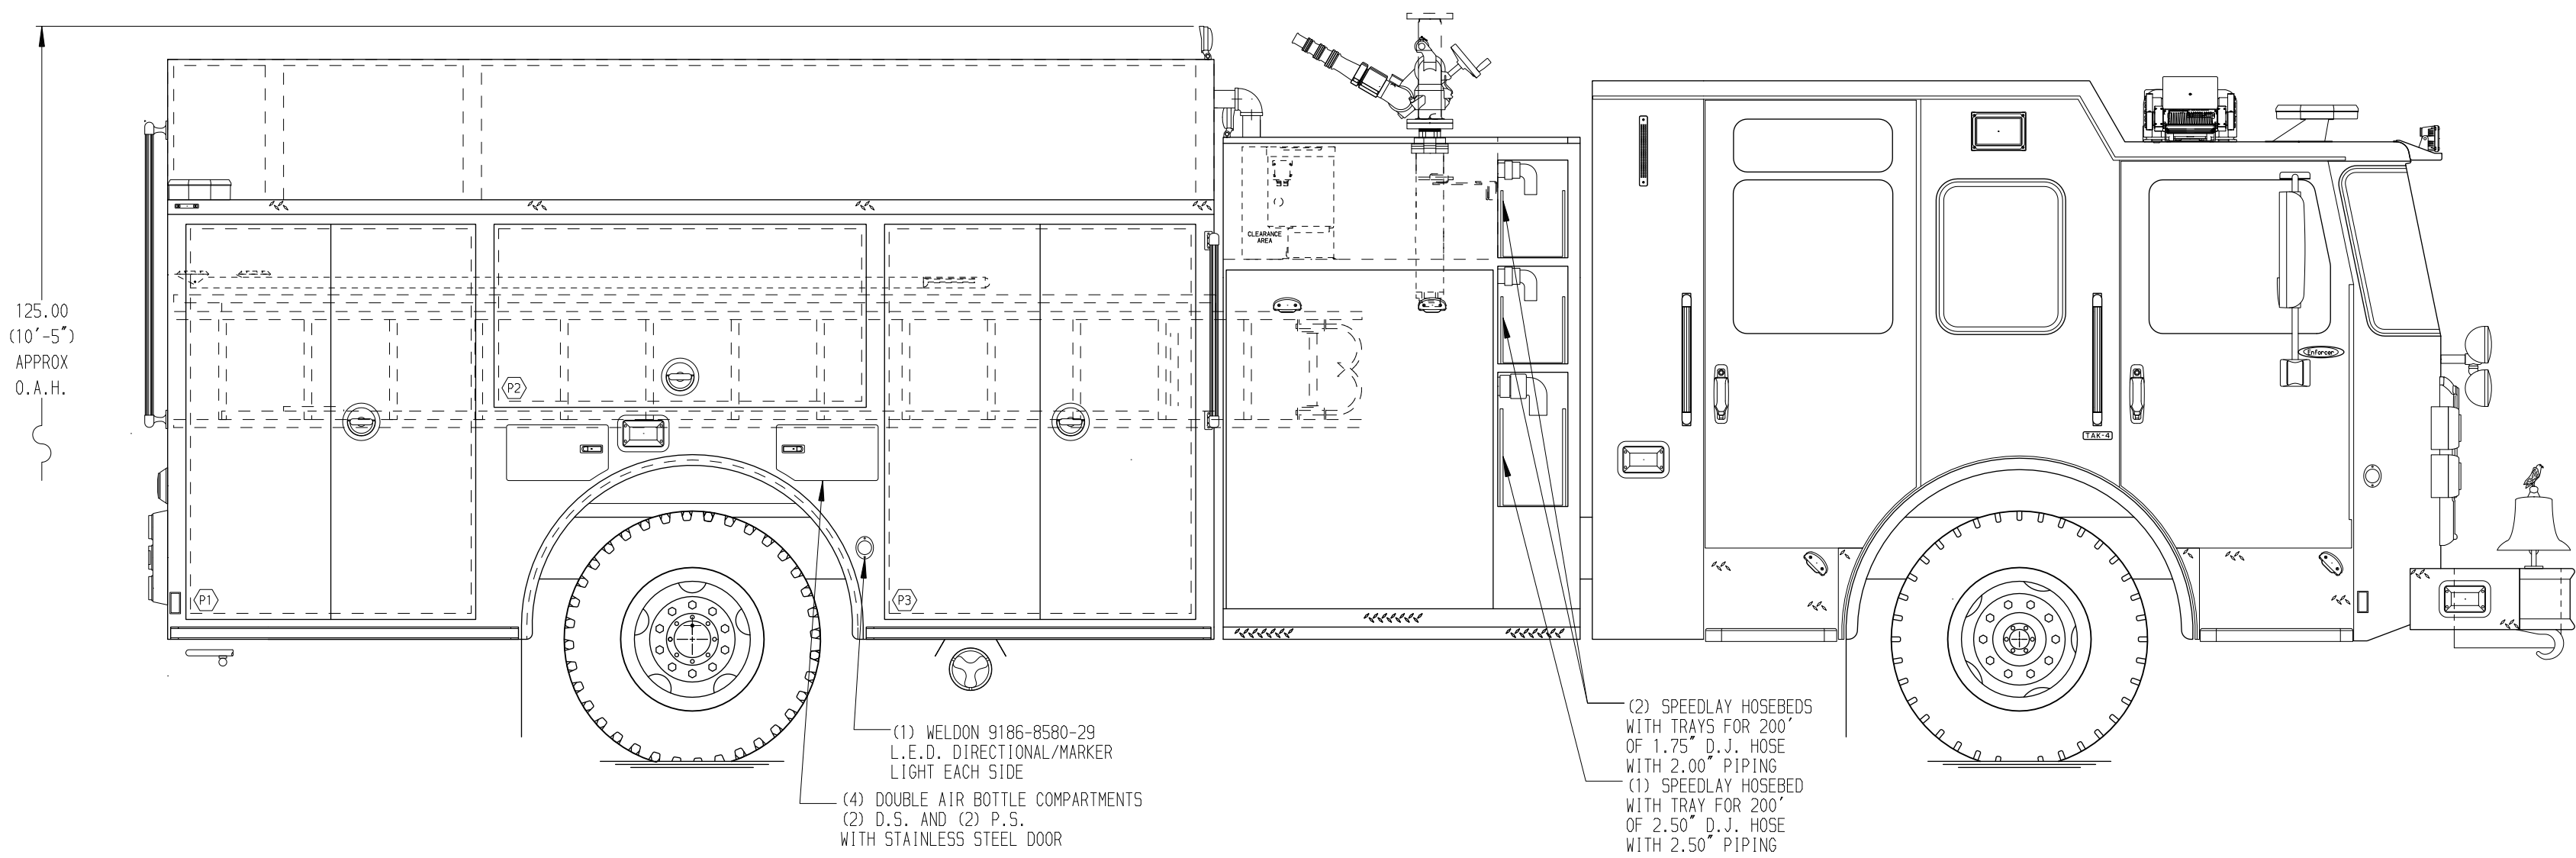


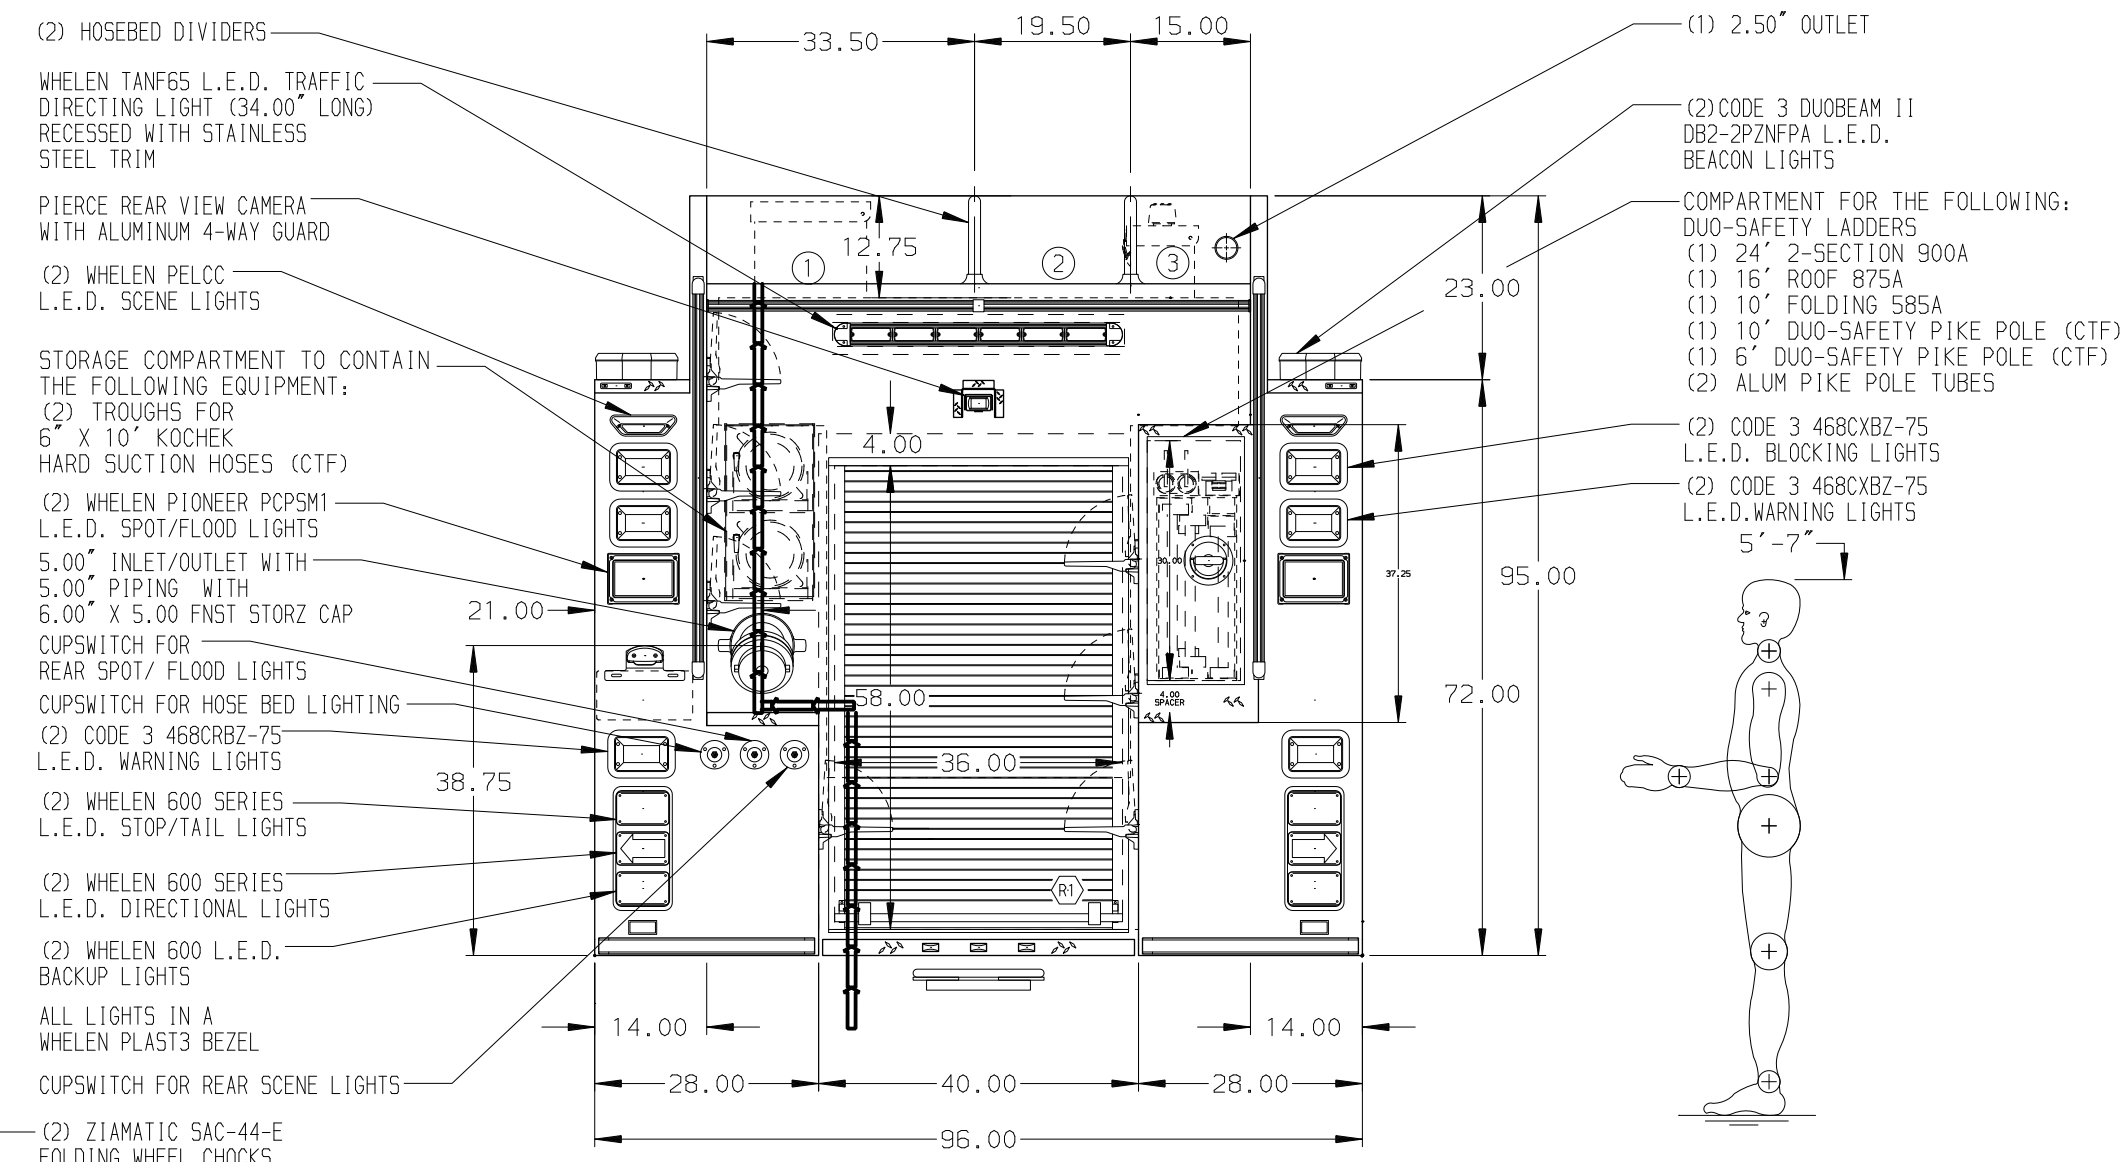

HOSEBED CAPACITIES	
①	800' OF 5.00" LDH HOSE
②	600' OF 1.75" D.J. HOSE
③	600' OF 2.50" D.J. HOSE

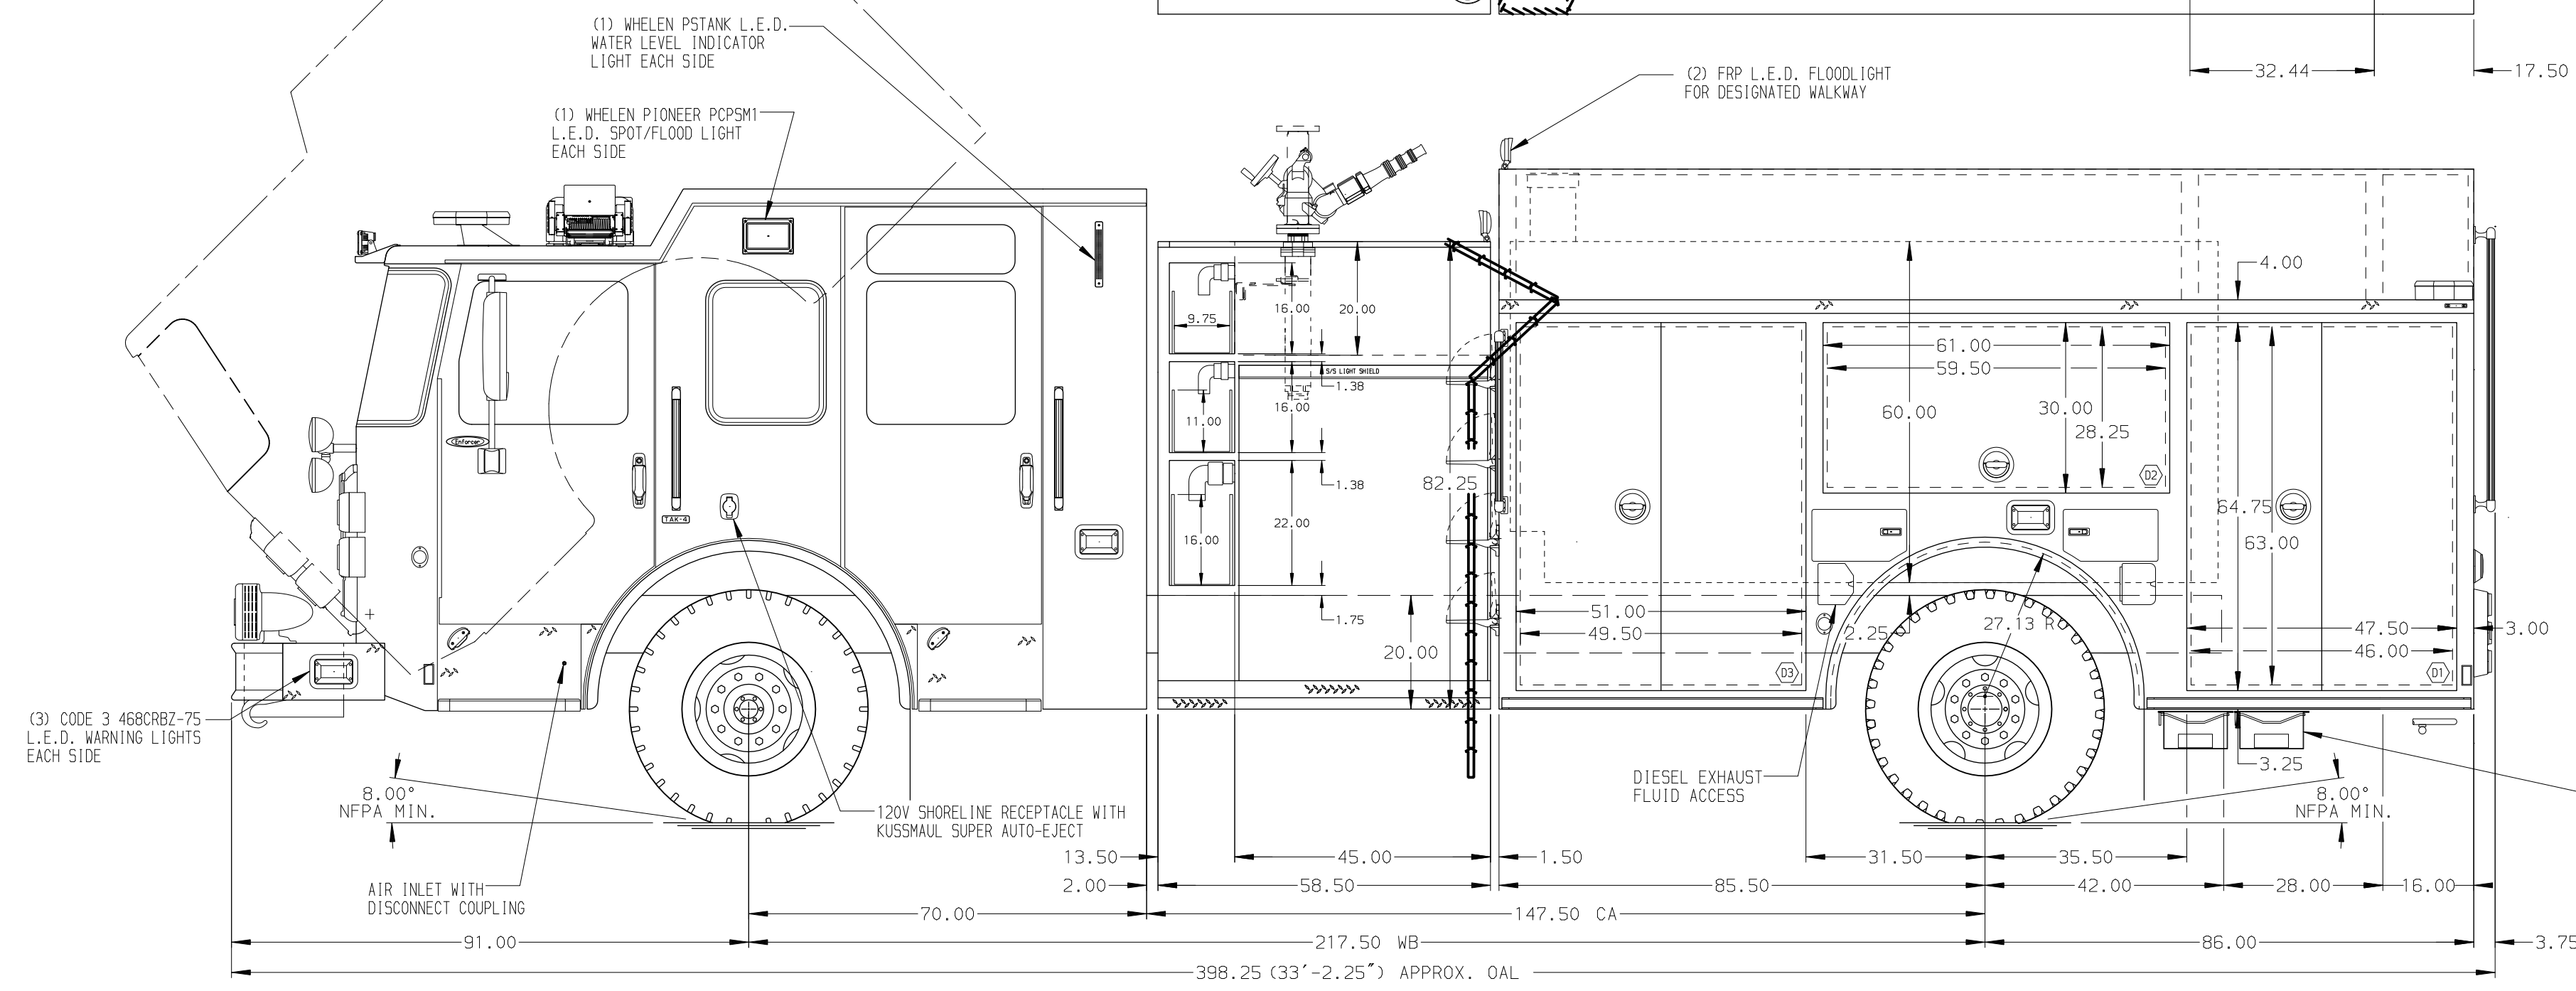

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
4. ONE ADJUSTABLE FULL WIDTH/DEPTH SHELF IN EACH BODY COMPARTMENT
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN D1 AND R1
6. TWO 120V NEMA DUPLEX RECEPTACLES IN EACH EMS CABINET

CHASSIS DATA				TITLE	1250-D-1250P, 1230 GAL OF WATER W/ 20 GAL FOAM CELL 171 FH FDLER, LADDERS BETWEEN TANK AND BODY
MAKE				FOR	SUNMAN RURAL FIRE DEPARTMENT SUNMAN, INDIANA
PIERCE				DWG NO.	31890AD
MODEL				NO.	
REV	DATE	BY	CH	ENFORCER	
04JAN18	LST	MSA			

JOB NO.	31890
SCALE	1:24
DATE	
DRAWN BY	LST
CHECKED BY	CSH
SHEET NO.	1 OF 1



JOB NO.	31890
SCALE	1:24
DATE	
DRAWN BY	LST
CHECKED BY	CSH
SHEET NO.	1 OF 1

TITLE
1250-D-1250P, 1230 GAL OF WATER W/ 20 GAL FOAM CELL
171 FH FDLER, LADDERS BETWEEN TANK AND BODY

FOR
SUNMAN RURAL FIRE DEPARTMENT
SUNMAN, INDIANA

DWG NO.
31890AD