


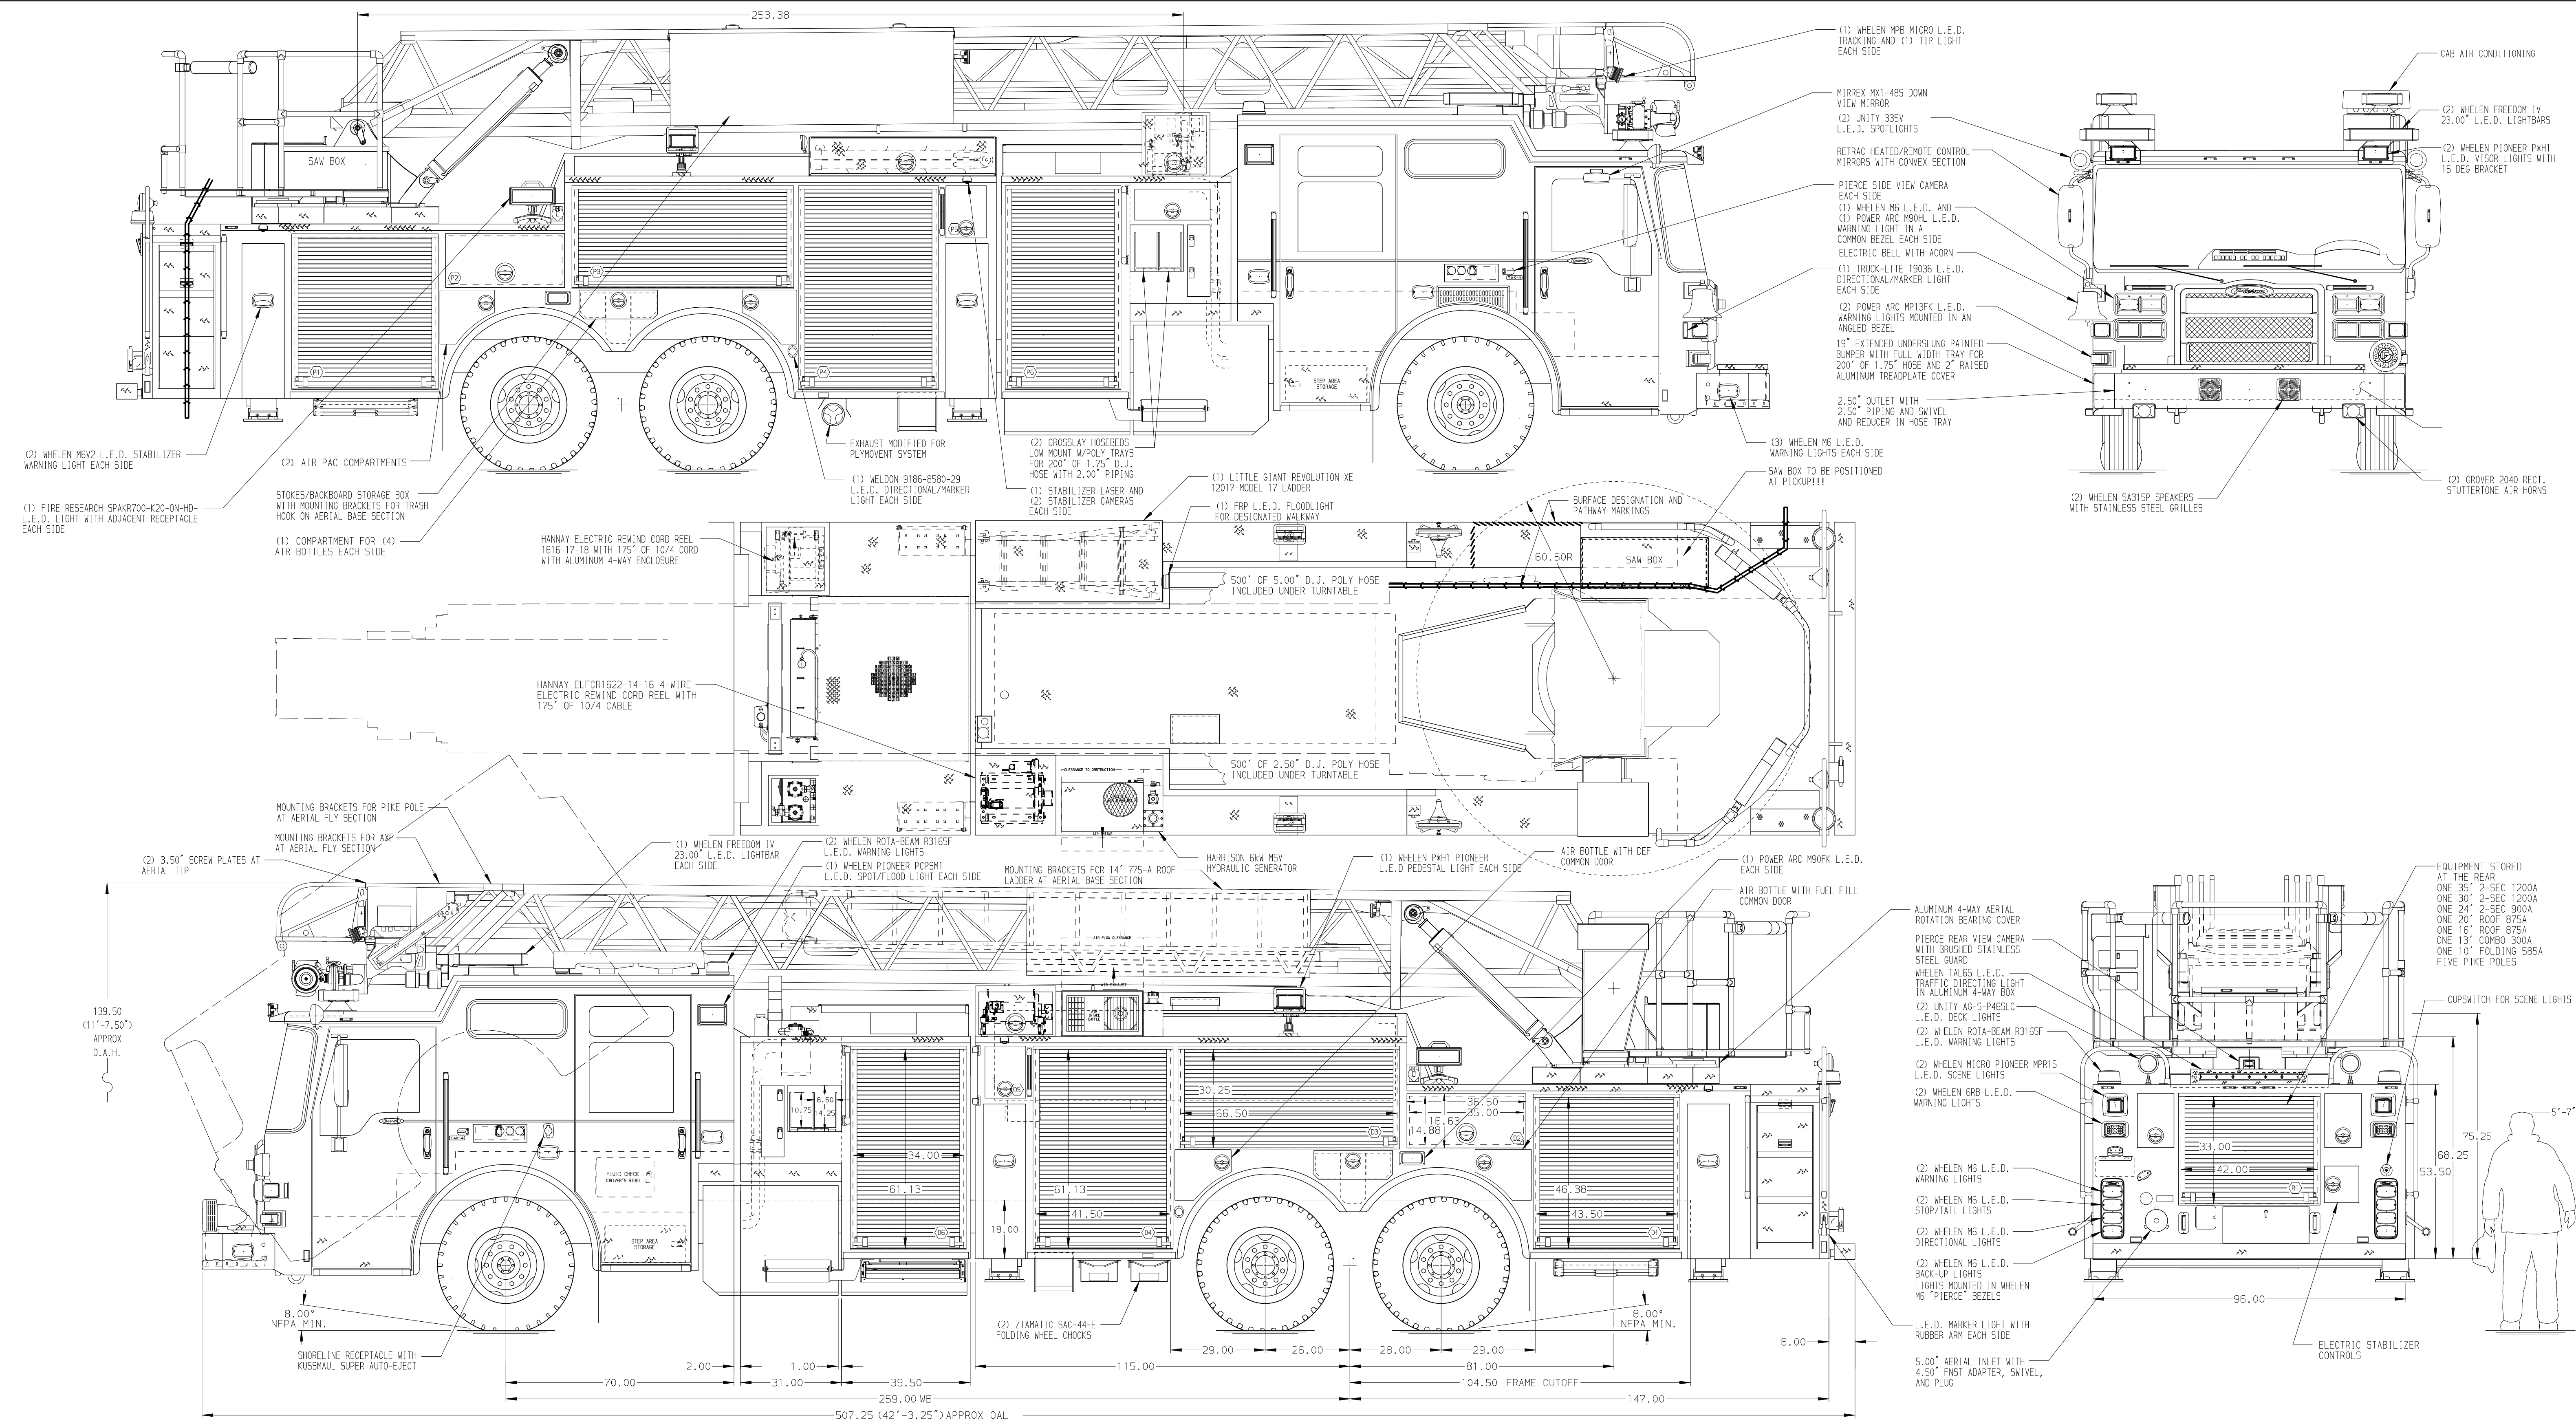

STAINLESS STEEL BODY

MAX O.A.H. 11'-7.50"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING AT DRIVER'S SIDE STEP WELL
- ADDITIONAL AIR TANK FOR AIR HORN CAPACITY
- CHARGER/COMPRESSOR LOCATED IN CAB BEHIND DRIVER'S SEAT
- STABILIZER COMPARTMENTS MODIFIED FOR 18" GROUND PENETRATION
- ONE ADJUSTABLE FULL WIDTH/FULL DEPTH SHELF IN COMPARTMENTS D1,D2,P1,P2,P3 AND TWO IN P6
- ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENTS D4,P4,P6
- ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENTS D4,P4,P6
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS D1,D4,P1,P4
- TWO ADJUSTABLE TOOL BOARDS MOUNTED TO SLIDE-OUT TRAY IN COMPARTMENT D4
- ONE SWING-OUT ALUMINUM TOOL BOARD IN COMPARTMENT D3

- HOSE STORAGE RACK WITH ADJUSTABLE DIVIDERS FOR ROLLED HOSE IN COMPARTMENT D4
- CIRCUIT BREAKER PANEL IN COMPARTMENT D5
- GENERATOR METER PACKAGE IN COMPARTMENT D5
- ONE FIVE PLACE RECEPTACLE STRIP AT TOP OF ENGINE TUNNEL, INSIDE THE EMS COMPARTMENT, D1,P1,P6
- TRIDENT FOLDING STEPS ON AERIAL DEVICE
- AERIAL WIRELESS REMOTE CONTROL IN COMPARTMENT D5
- L.E.D. LIGHTING ON AERIAL LADDER SECTIONS
- (2) 120V RECEPTACLES AT AERIAL TIP
- FIRE RESEARCH 3-WAY INTERCOM SYSTEM BETWEEN AERIAL TIP,PUMP PANEL & TURNTABLE
- LIFTING EYE ROPE RESCUE ATTACHMENT AT AERIAL TIP

- 1500 GPM HIGH FLOW WATERWAY
- AIR HORN CONTROL AT TURNTABLE
- TWO SCREW PLATES TO BE PROVIDED AT AERIAL TIP FOR MOUNTING OF STACKED TIPS
- BATTERY CHARGER INDICATOR AT DRIVER'S SIDE STEPWELL
- FULL WIDTH REAR MUD FLAP

REV	DATE	BY	CH	DASH CF
27FEB18	MWA	MSA	MAKE	CHASSIS DATA
22JAN18	MWA	GRM	PIERCE	FOR
16NOV17	MWA	GRM	MODEL	DWG NO.

Pierce MANUFACTURING INC.		JOB NO.	31912
TITLE		SCALE	1:24
FOR		DATE	
DWG NO.		DRAWN BY	MWA
		CHECKED BY	CRI
		SHEET SIZE	D
		SHEET NO.	1 OF 1