
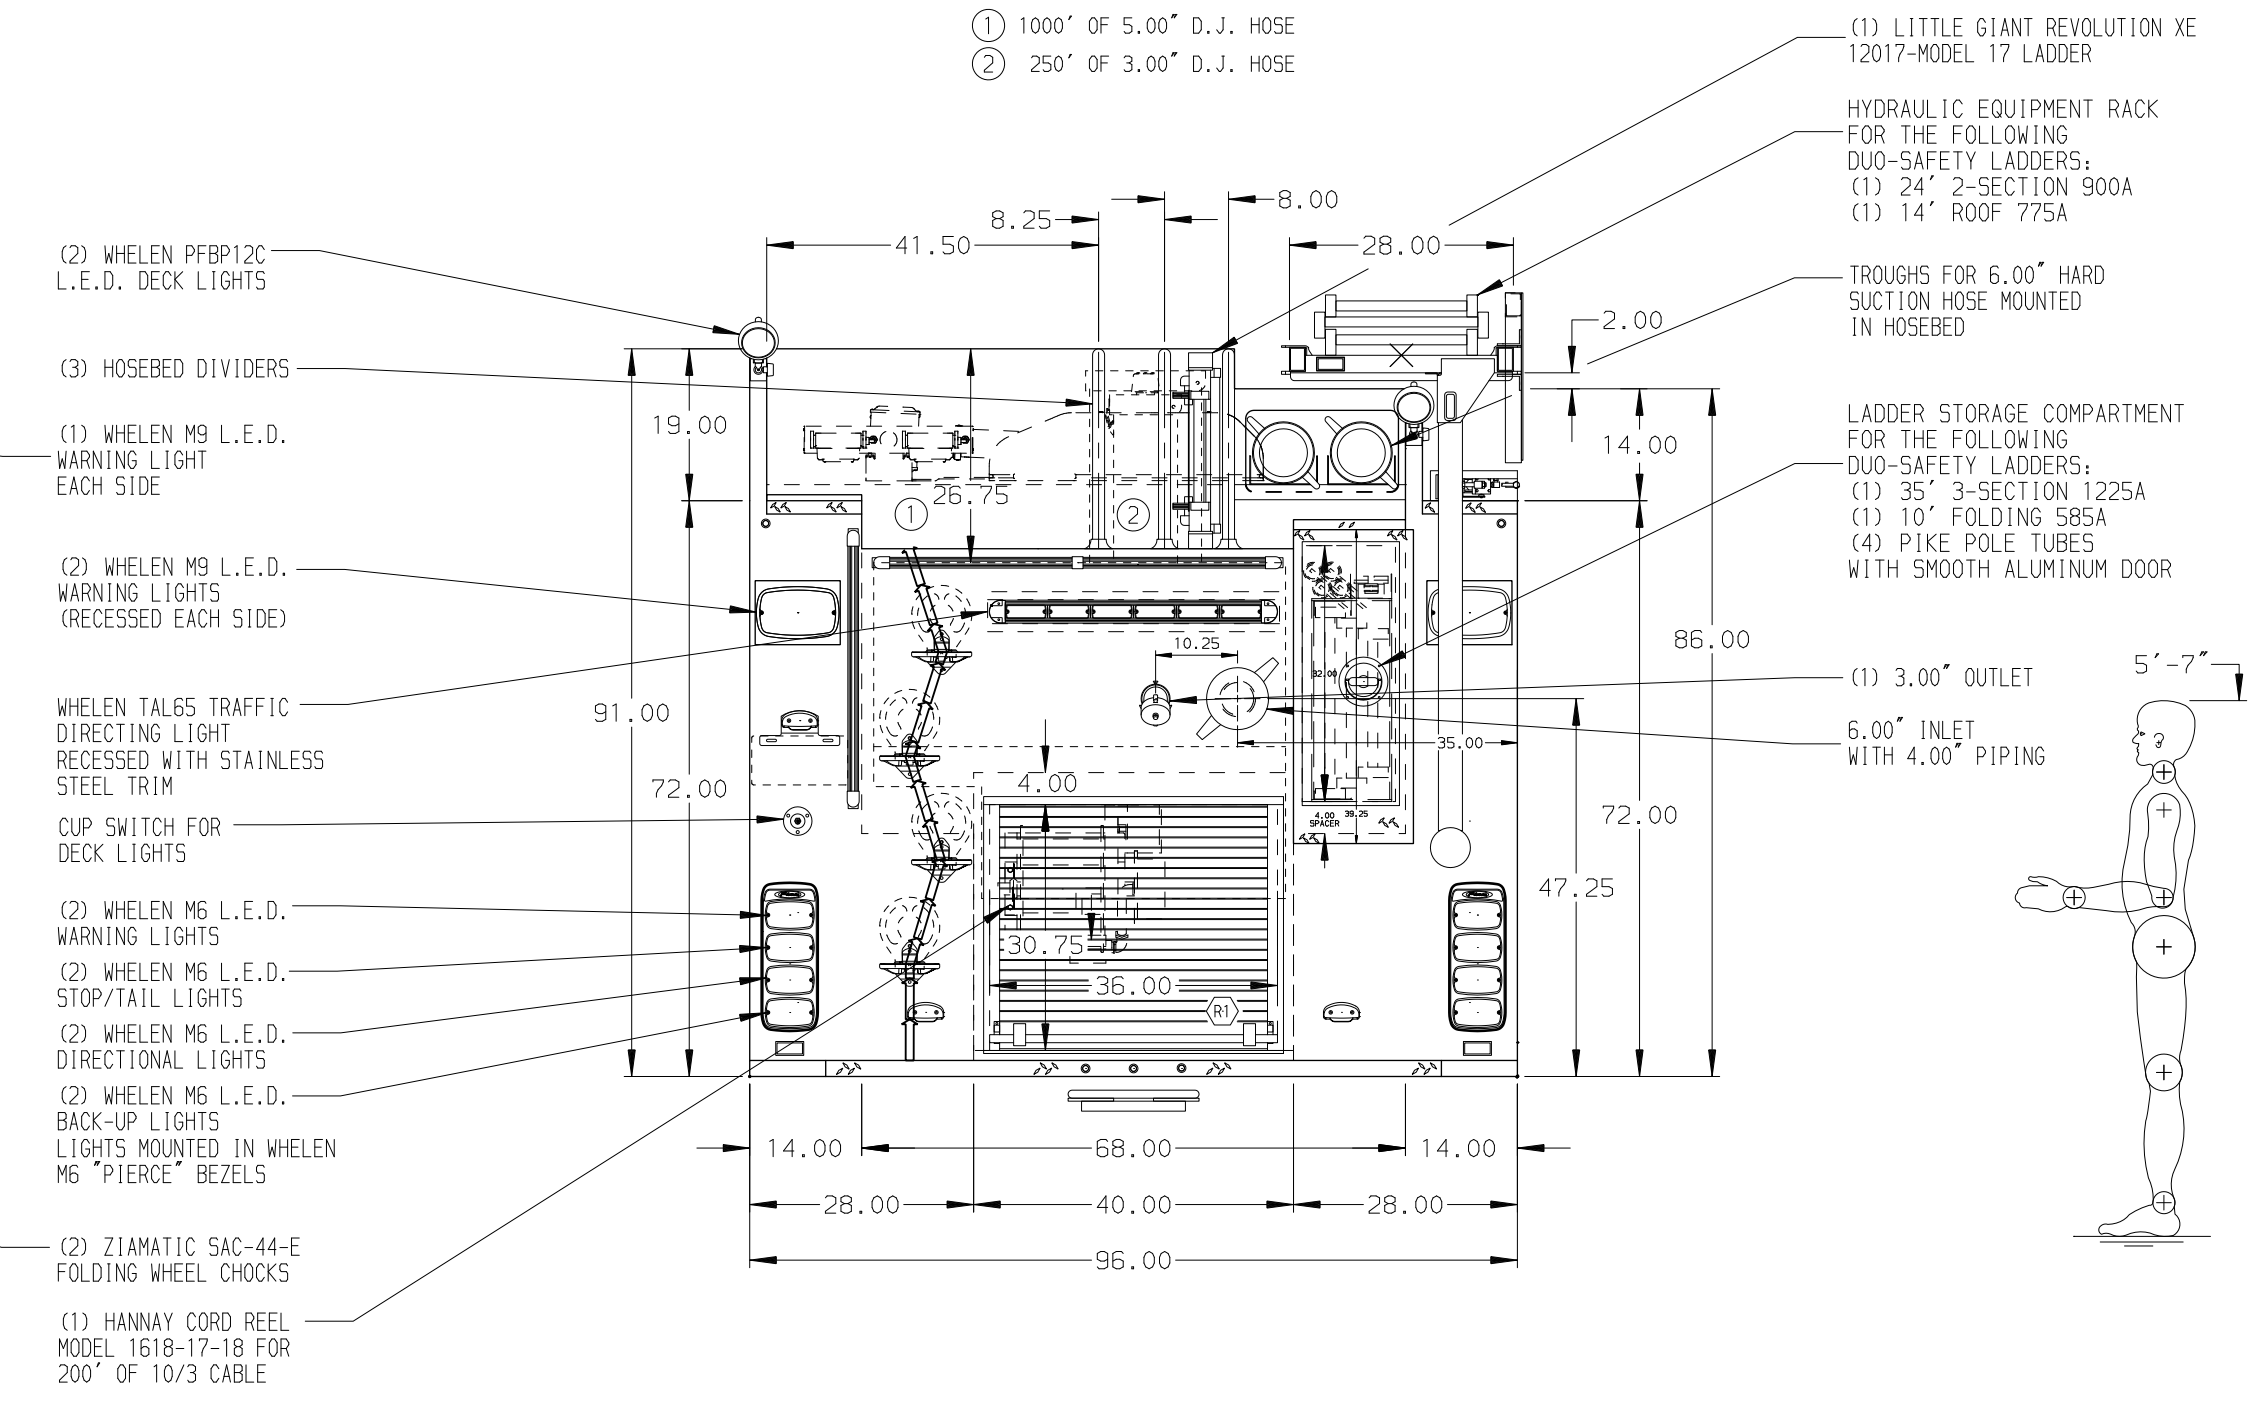


HOSEBED CAPACITIES
 ① 1000' OF 5.00" D.J. HOSE
 ② 250' OF 3.00" D.J. HOSE

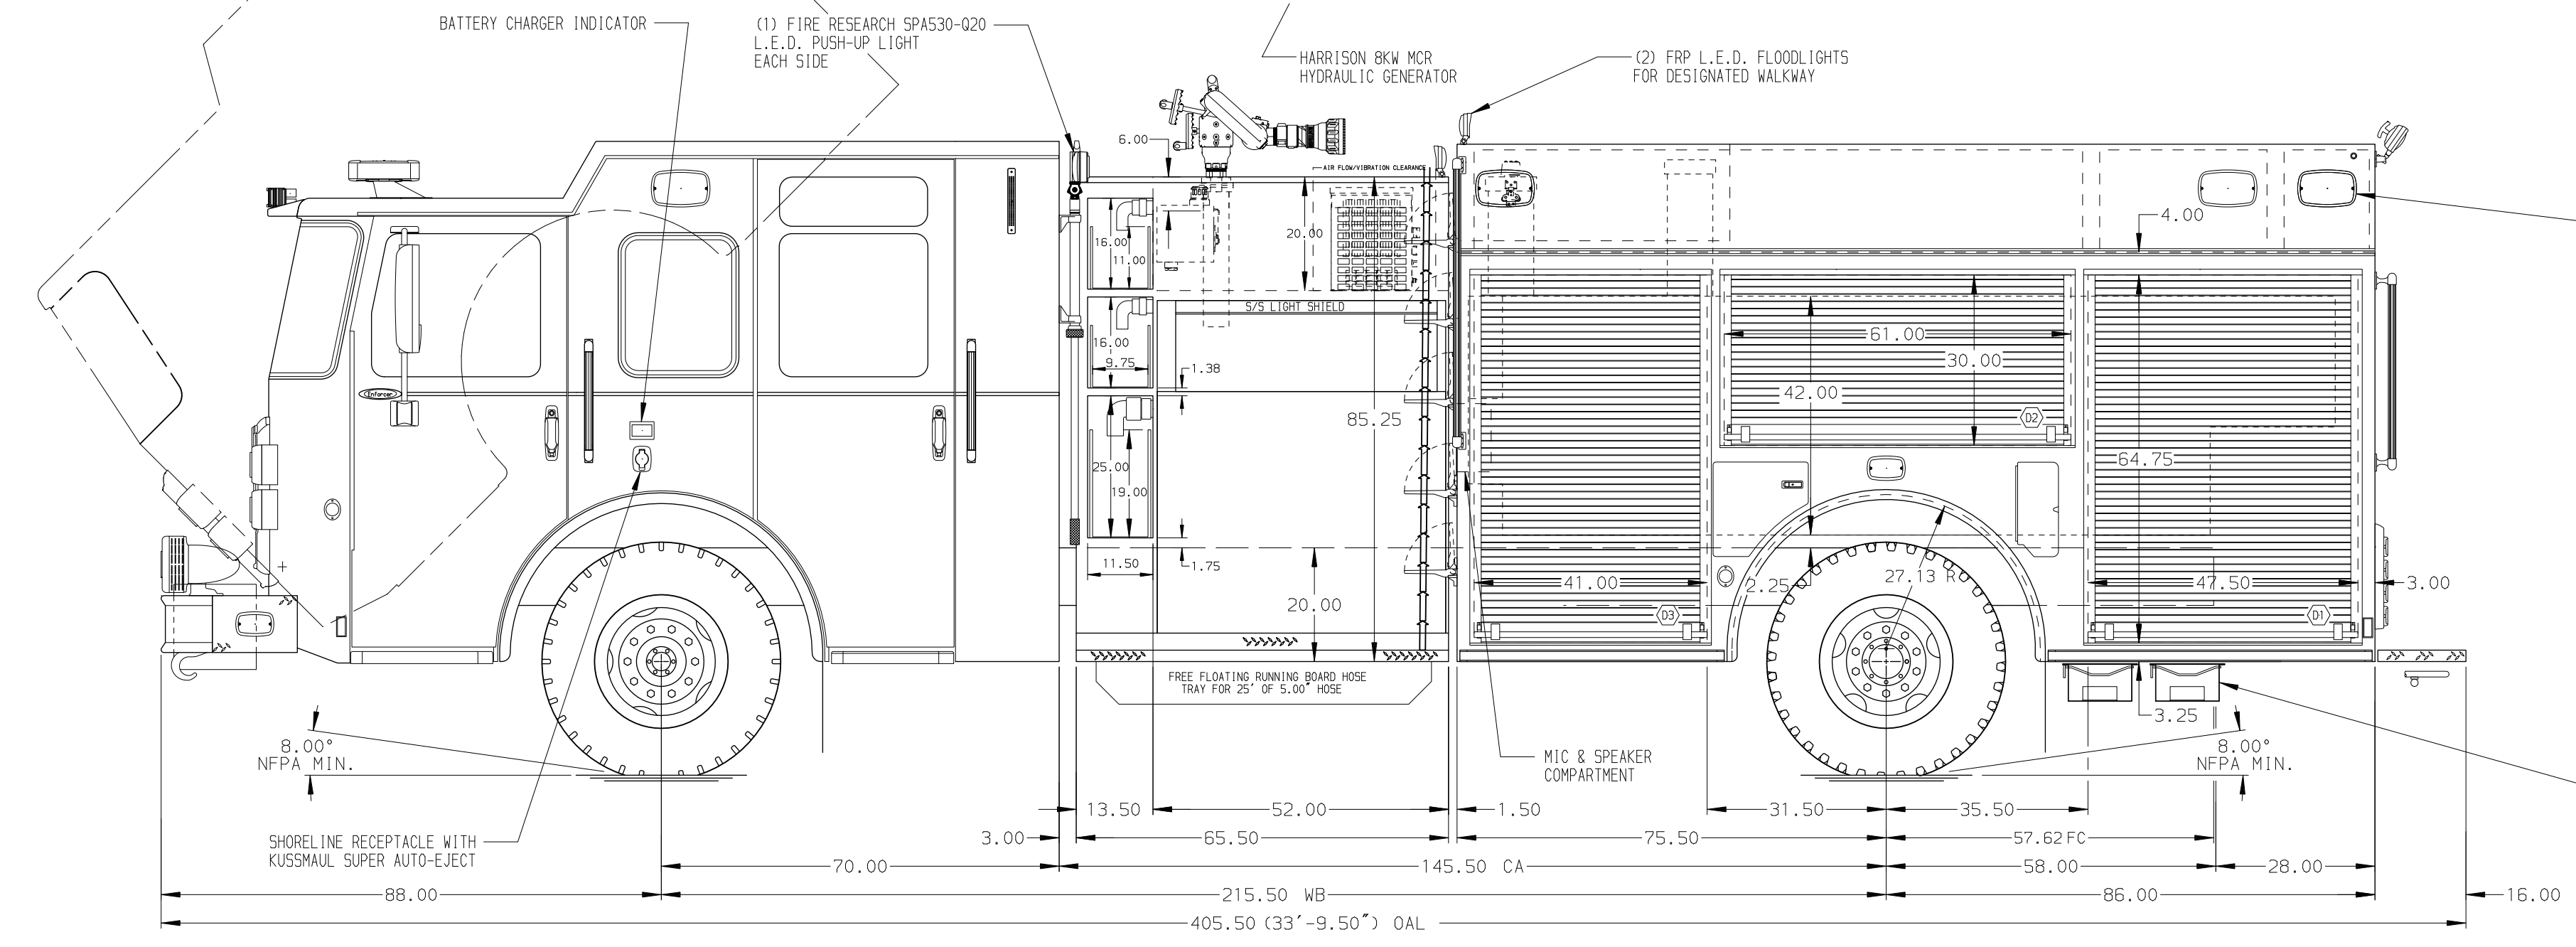

STAINLESS STEEL BODY

MAXIMUM O.A.H. 126.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____



JOB NO. 32308

SCALE 1:24 DATE

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED D1,D2,D3,P1,P2,P3,R1
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF LOCATED IN COMPARTMENTS D1,D3,P1,P3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS D1,D3,P1,P3
- SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENTS D2,P2
- CIRCUIT BREAKER PANEL IN COMPARTMENT 2
- AIR INLET WITH DISCONNECT COUPLING IN D.S. STEP WELL

REV	DATE	BY	CH	ENFORCER	CHASSIS DATA	TITLE
					MAKE	2000-D-980G WATER, 20G FOAM, 161" FDLR BODY, HSKY 12
					MODEL	(3) SPEEDLAYS, DELUGE, GENERATOR, HYD LADDER RACK
					FOR	YOUNGSTOWN FIRE COMPANY
						YOUNGSTOWN, NEW YORK
					DWG NO.	32308AD

CHECKED BY	SHEET SIZE	SHEET NO.
JWO	D	1 OF 1
AZA		