


HOSEBED CAPACITIES

① 300' OF 2.50" D.J. POLY HOSE

② 200' OF 1.75" D.J. POLY HOSE

③ 1000' OF 5.00" D.J. POLY HOSE

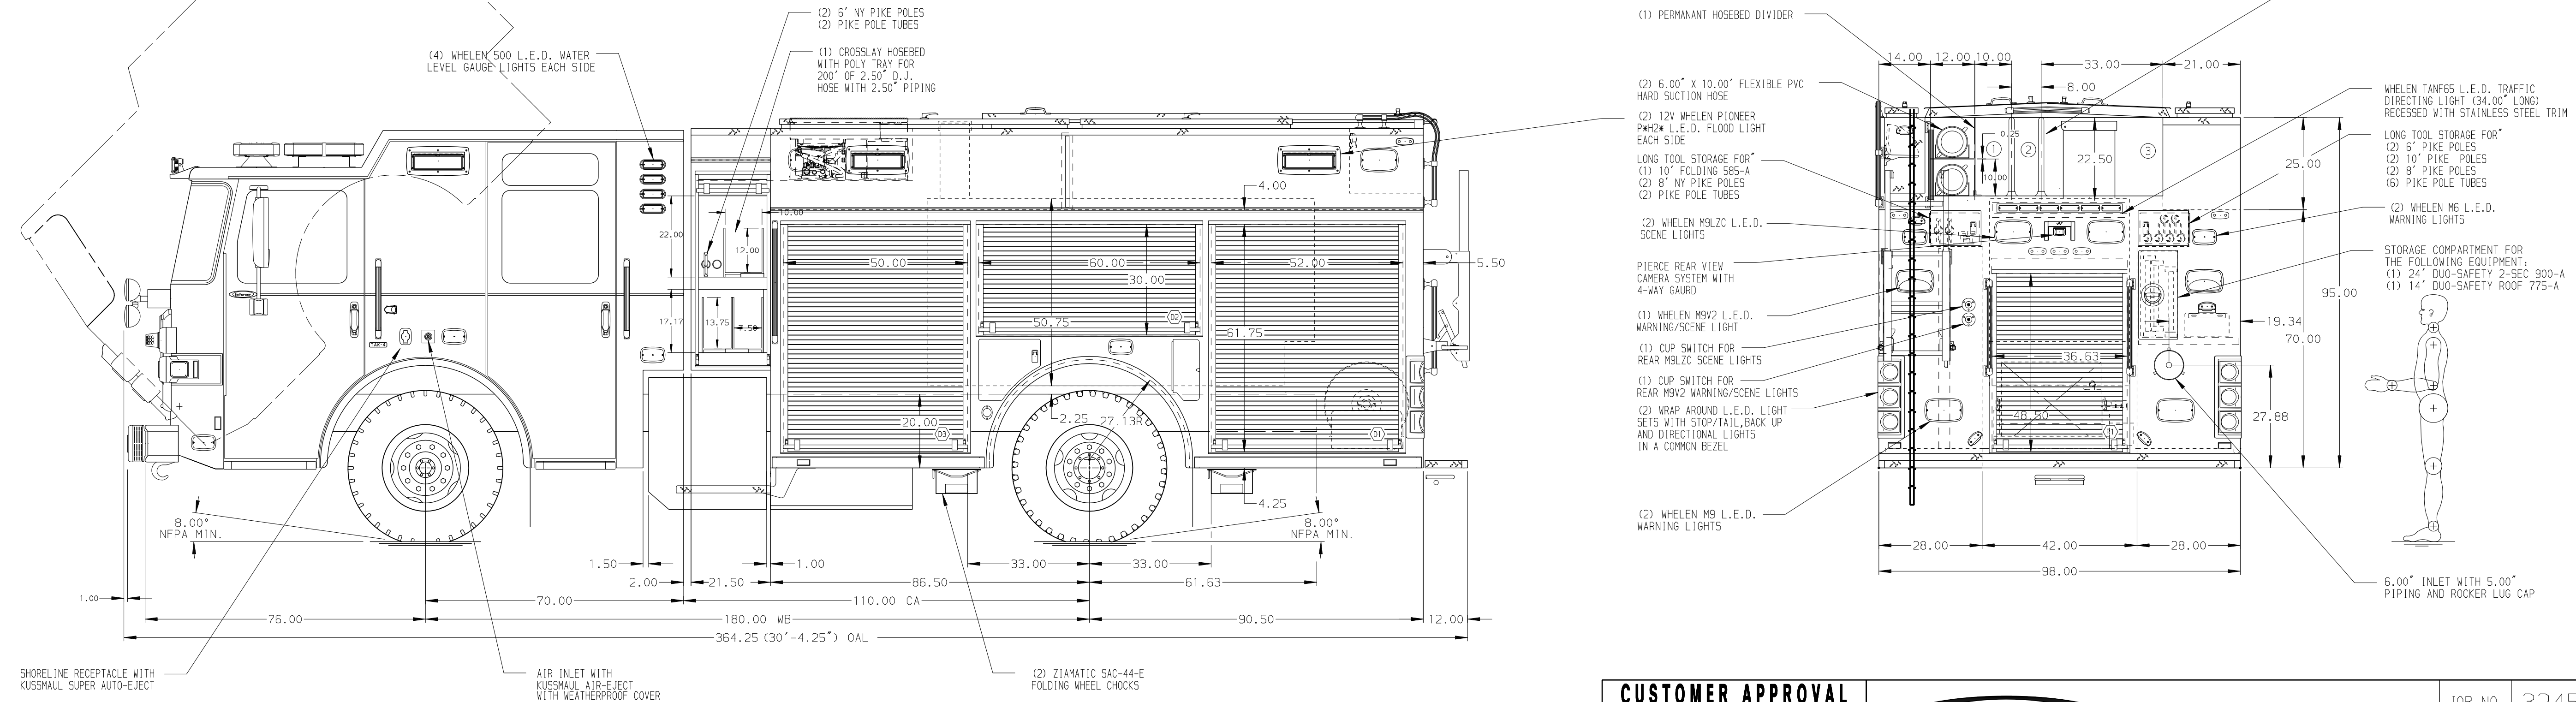

ALUMINUM BODY

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- ELASTIC PULL STRAP FOR DOOR ON BOTH CROSSLAY DOORS
- L.E.D. LIGHT STICKS LOCATED IN THE CARGO AREA
- TWO FULL WIDTH/DEPTH ADJUSTABLE SHELF LOCATED IN COMPARTMENT P1, THREE IN P3, FOUR IN D1
- ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT D1, D3, & P1
- ONE ADJUSTABLE TILTING SLIDE-OUT TRAY IN COMPARTMENT D1
- ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2.00" SIDES IN COMPARTMENT P1, TWO IN D1
- ONE ADJUSTABLE TOOL BOARD MOUNTED TO SLIDE-OUT TRAY IN COMPARTMENT D3
- ONE SWING-OUT ALUMINUM TOOL BOARD IN COMPARTMENT P2
- ONE POLY TOOL BOX IN COMPARTMENT D1
- CYCLE DRAWER ASSEMBLY IN COMPARTMENT P3
- ONE VERTICAL PARTITION IN COMPARTMENT D1
- ALUMINUM PEGBOARD WITH TRACKS ON THE REAR WALL OF COMPARTMENT P2
- PERMANENTLY MOUNTED SHELF WITH INVERTED LIP IN COMPARTMENT D3
- MOUNTING RACK FOR (8) FIRE EXTINGUISHERS LOCATED D2
- NORCOLD NR75188 REFRIGERATOR WITH ADJACENT A/C AND D/C OUTLET LOCATED P3
- CIRCUIT BREAKER PANEL IN COMPARTMENT D3
- ONE HANNAY BOOSTER REEL WITH CAPACITY FOR 200' OF 1.00" HOSE IN COMPARTMENT R1 (EF34-23-24)
- TWO HANNAY CORD REELS (E1616-17-18) WITH 200' OF 12/3 CABLE LOCATED IN P5 HATCH COMPARTMENT

CUSTOMER APPROVAL			
APPROVED BY:			
DATE:			
CHASSIS DATA	TITLE	1500-D-750P, 177" PUC RESCUE BODY, (3) XLAYS LADDERS THRU BODY, (2) H.S.H., DELUGE, GENERATOR	
MAKE	FOR	LAWTON FIRE DEPARTMENT LAWTON, MICHIGAN	
PIERCE	DWG NO.	32455AD	
MODEL			
ENFORCER			
REV	DATE	BY	CH

		JOB NO.	32455
		SCALE	1:24
		DATE	
		DRAWN BY	MMF
		CHECKED BY	NPE
		SHEET SIZE	D
		SHEET NO.	1 OF 1