

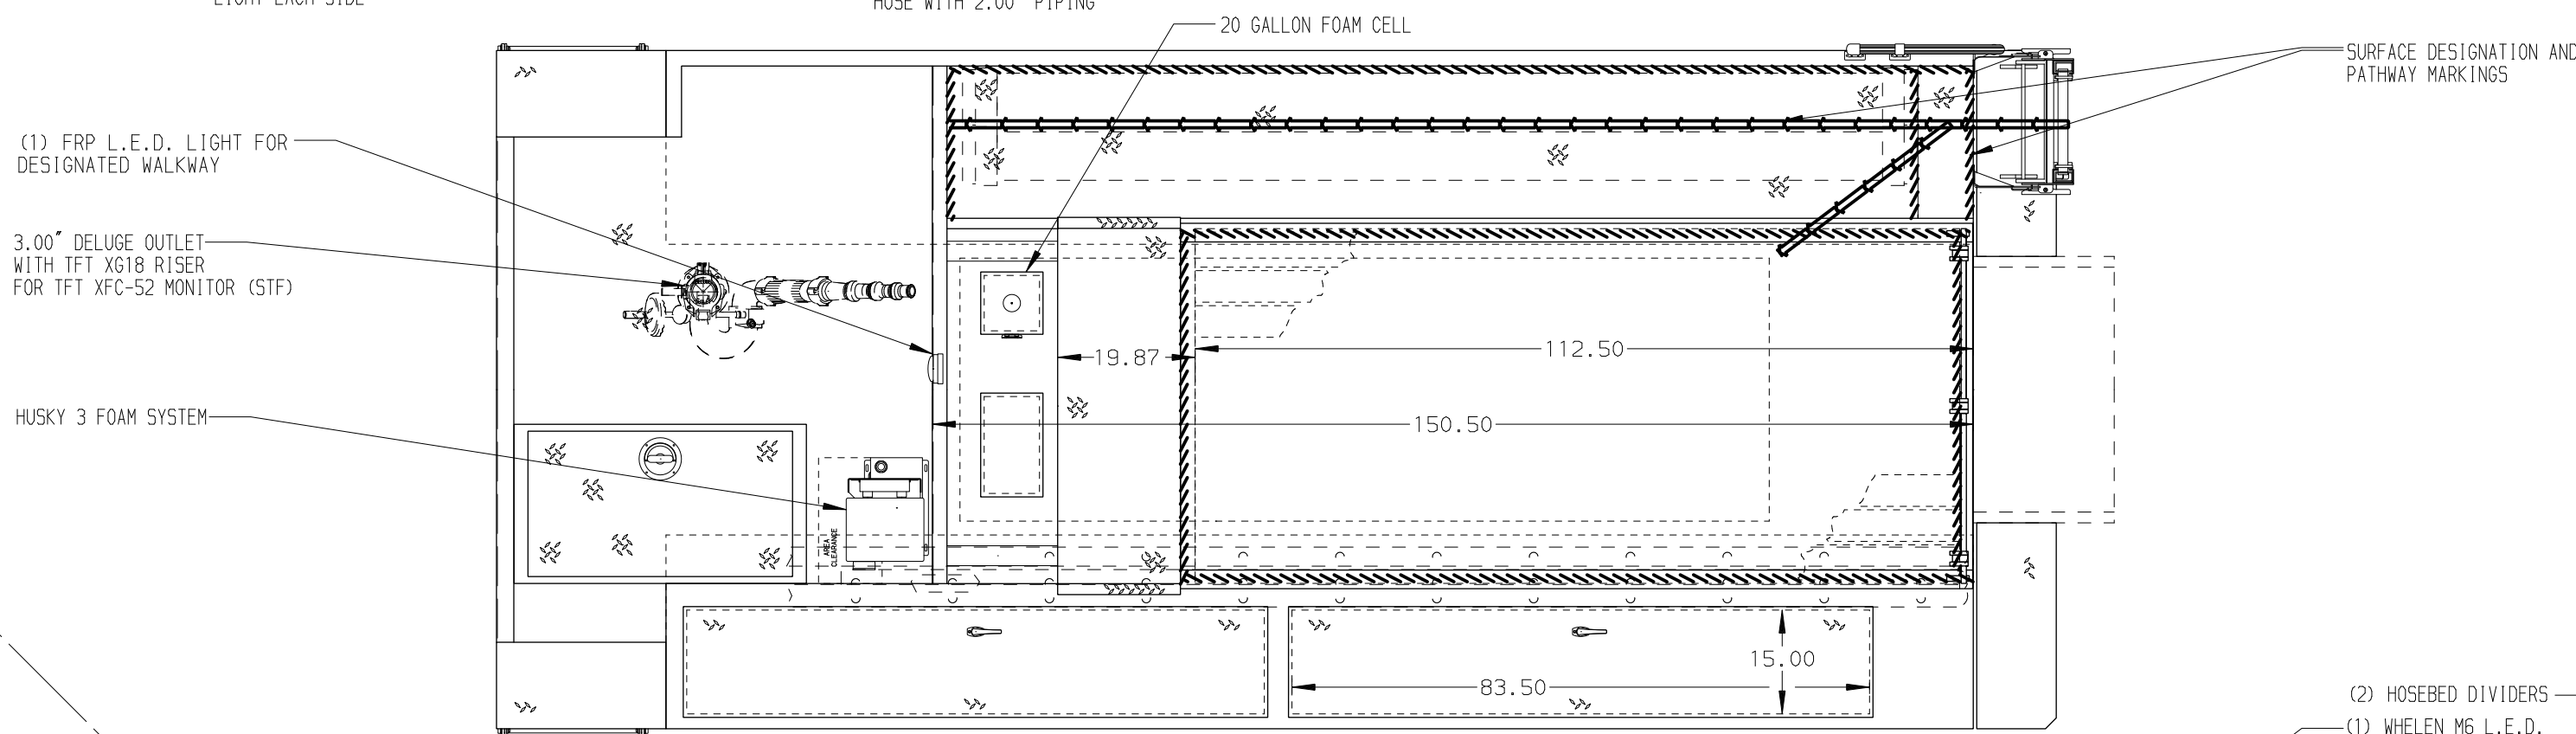
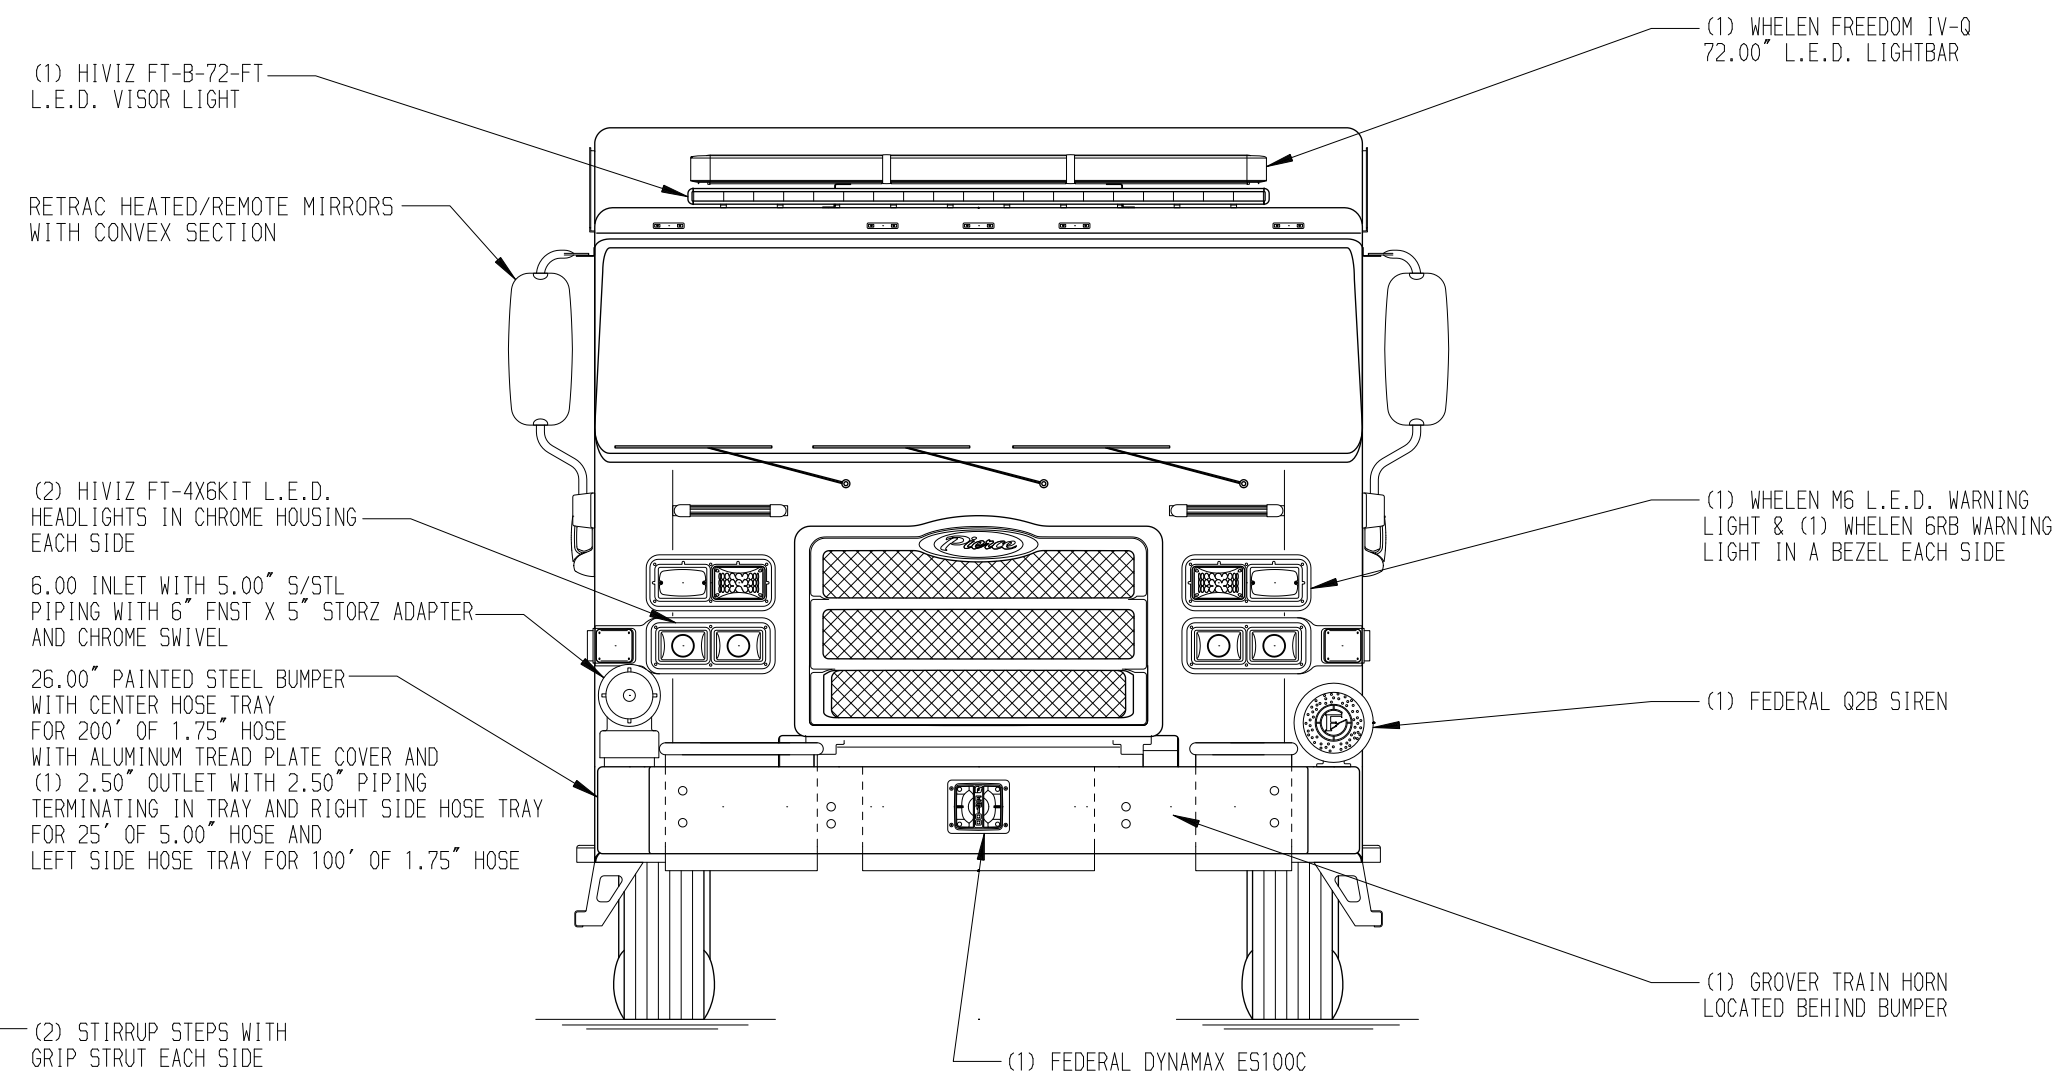
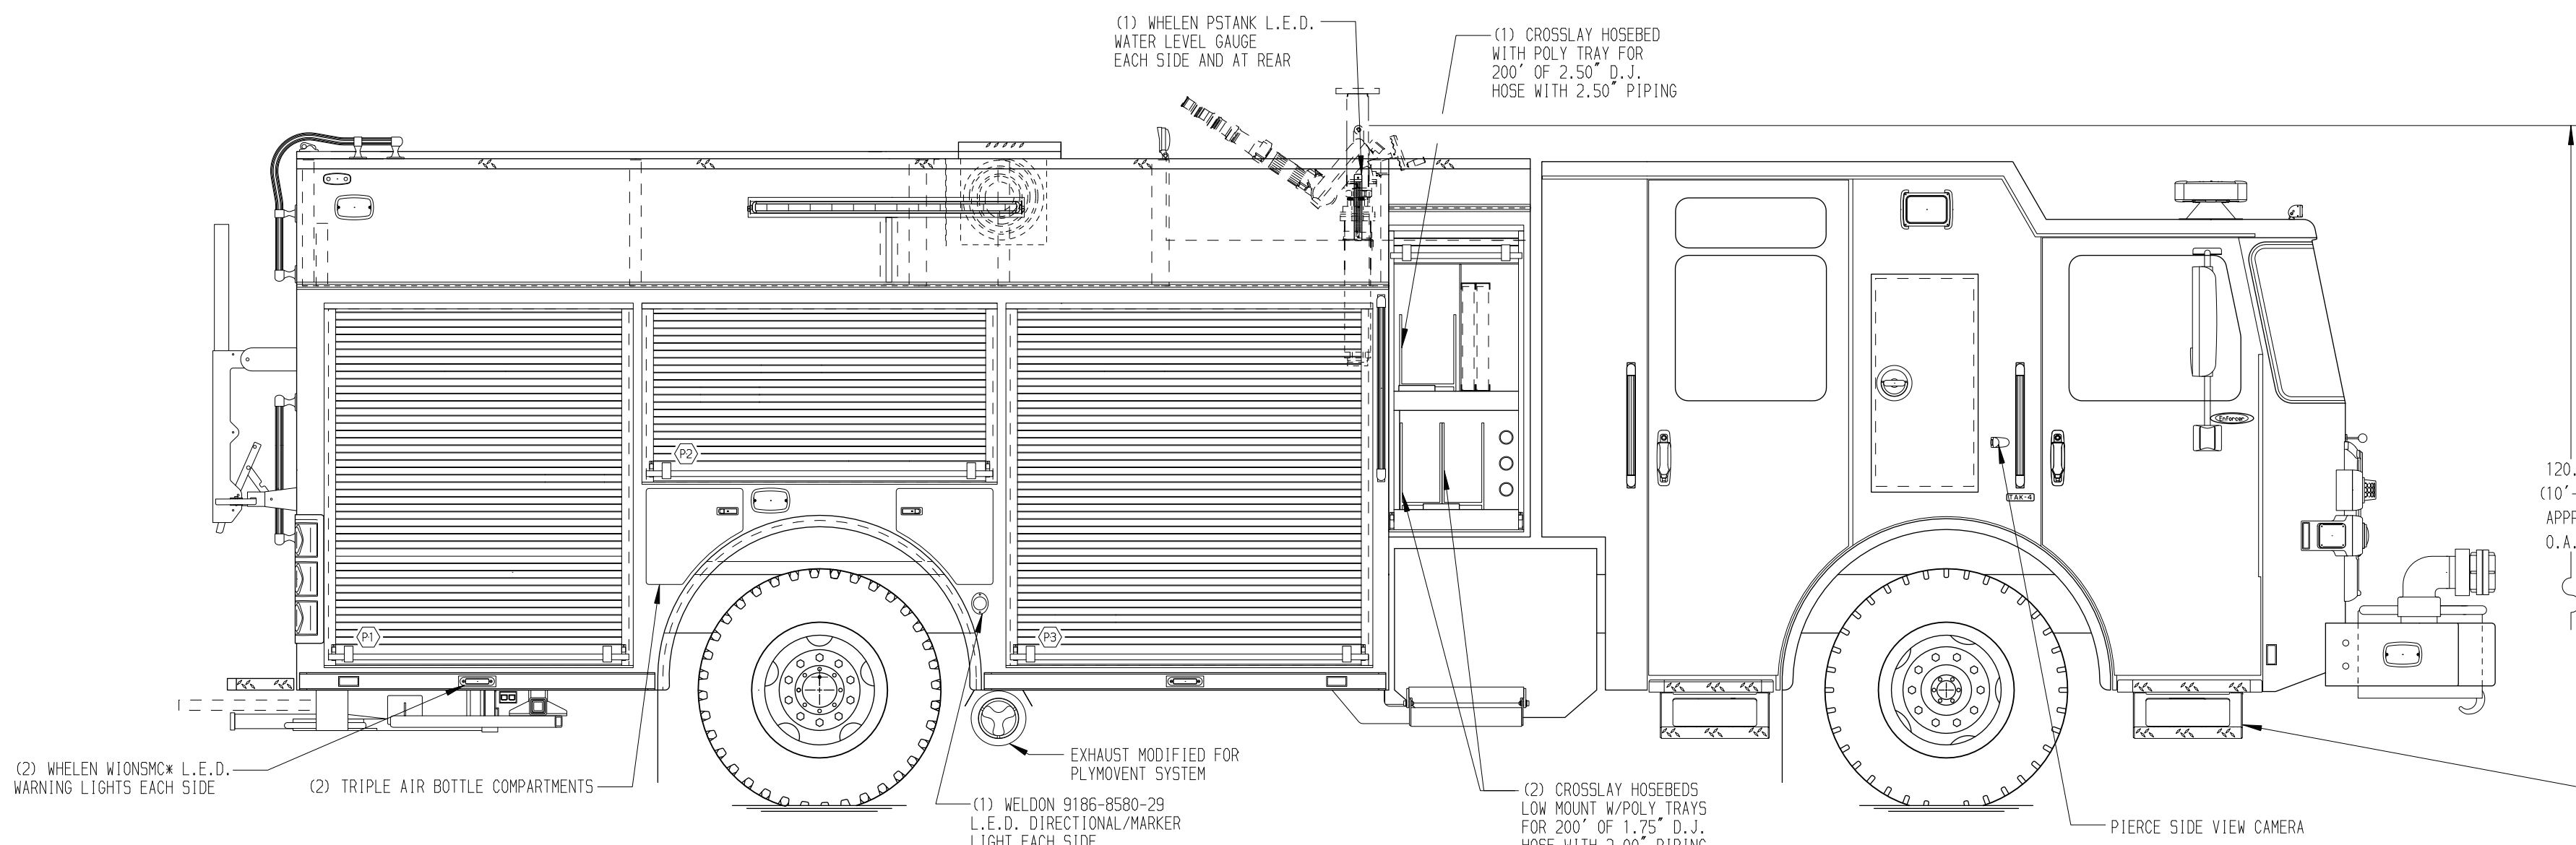


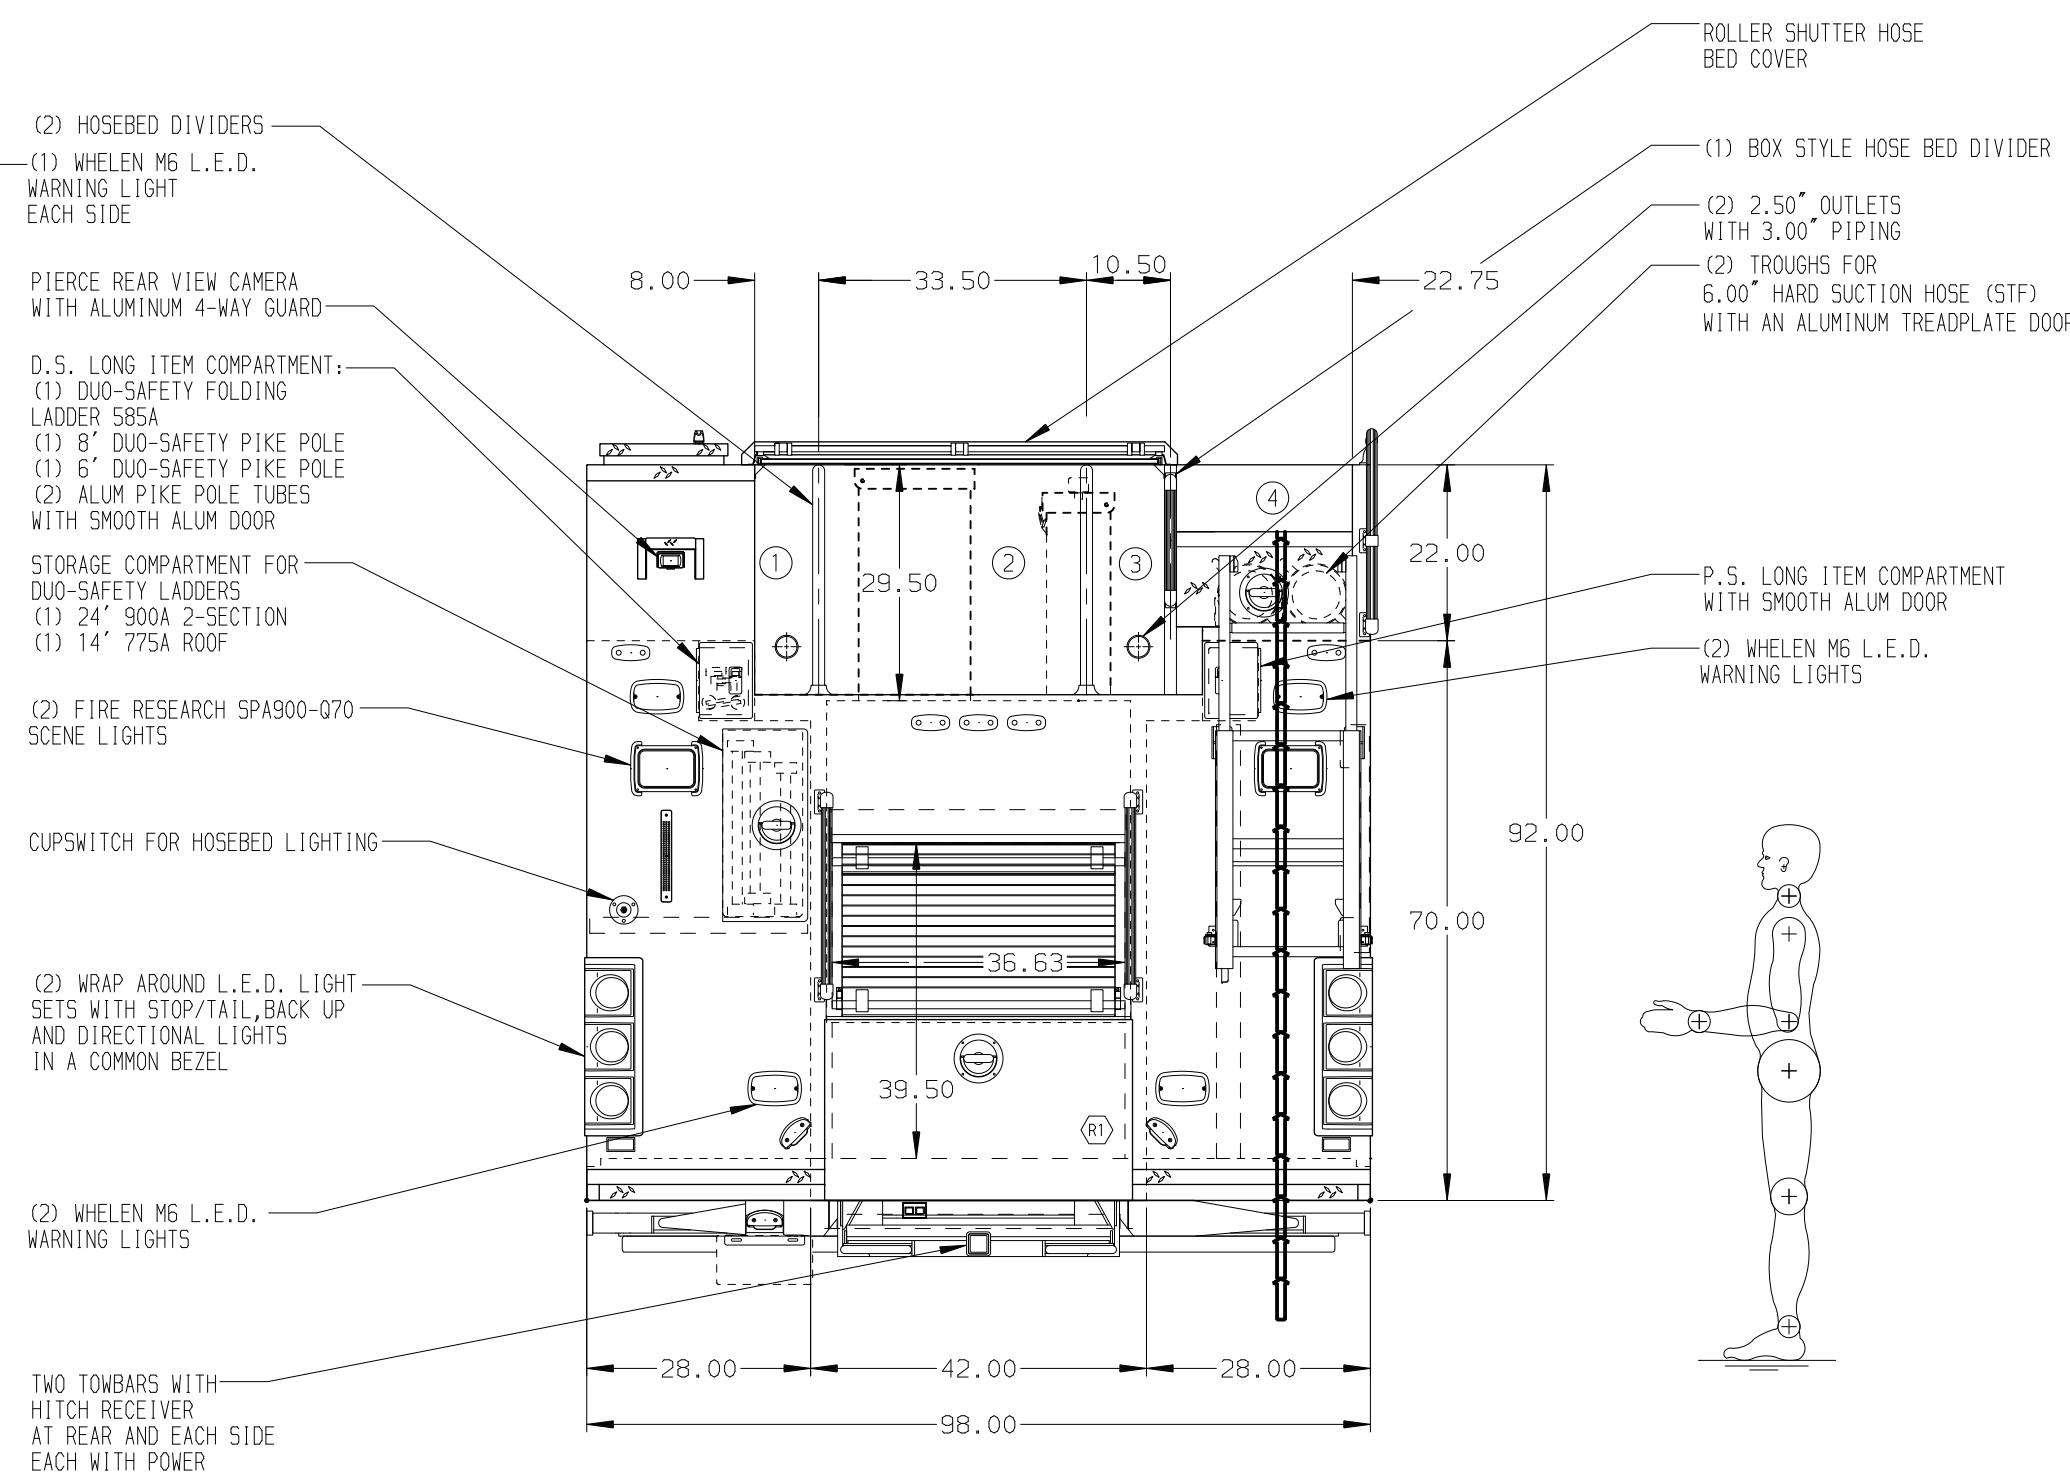

- HOSEBED CAPACITIES
- ① 250' OF 3.00" HOSE
 - ② 1000' OF 5.00" HOSE
 - ③ 250' OF 2.50" HOSE
 - ④ WALKWAY

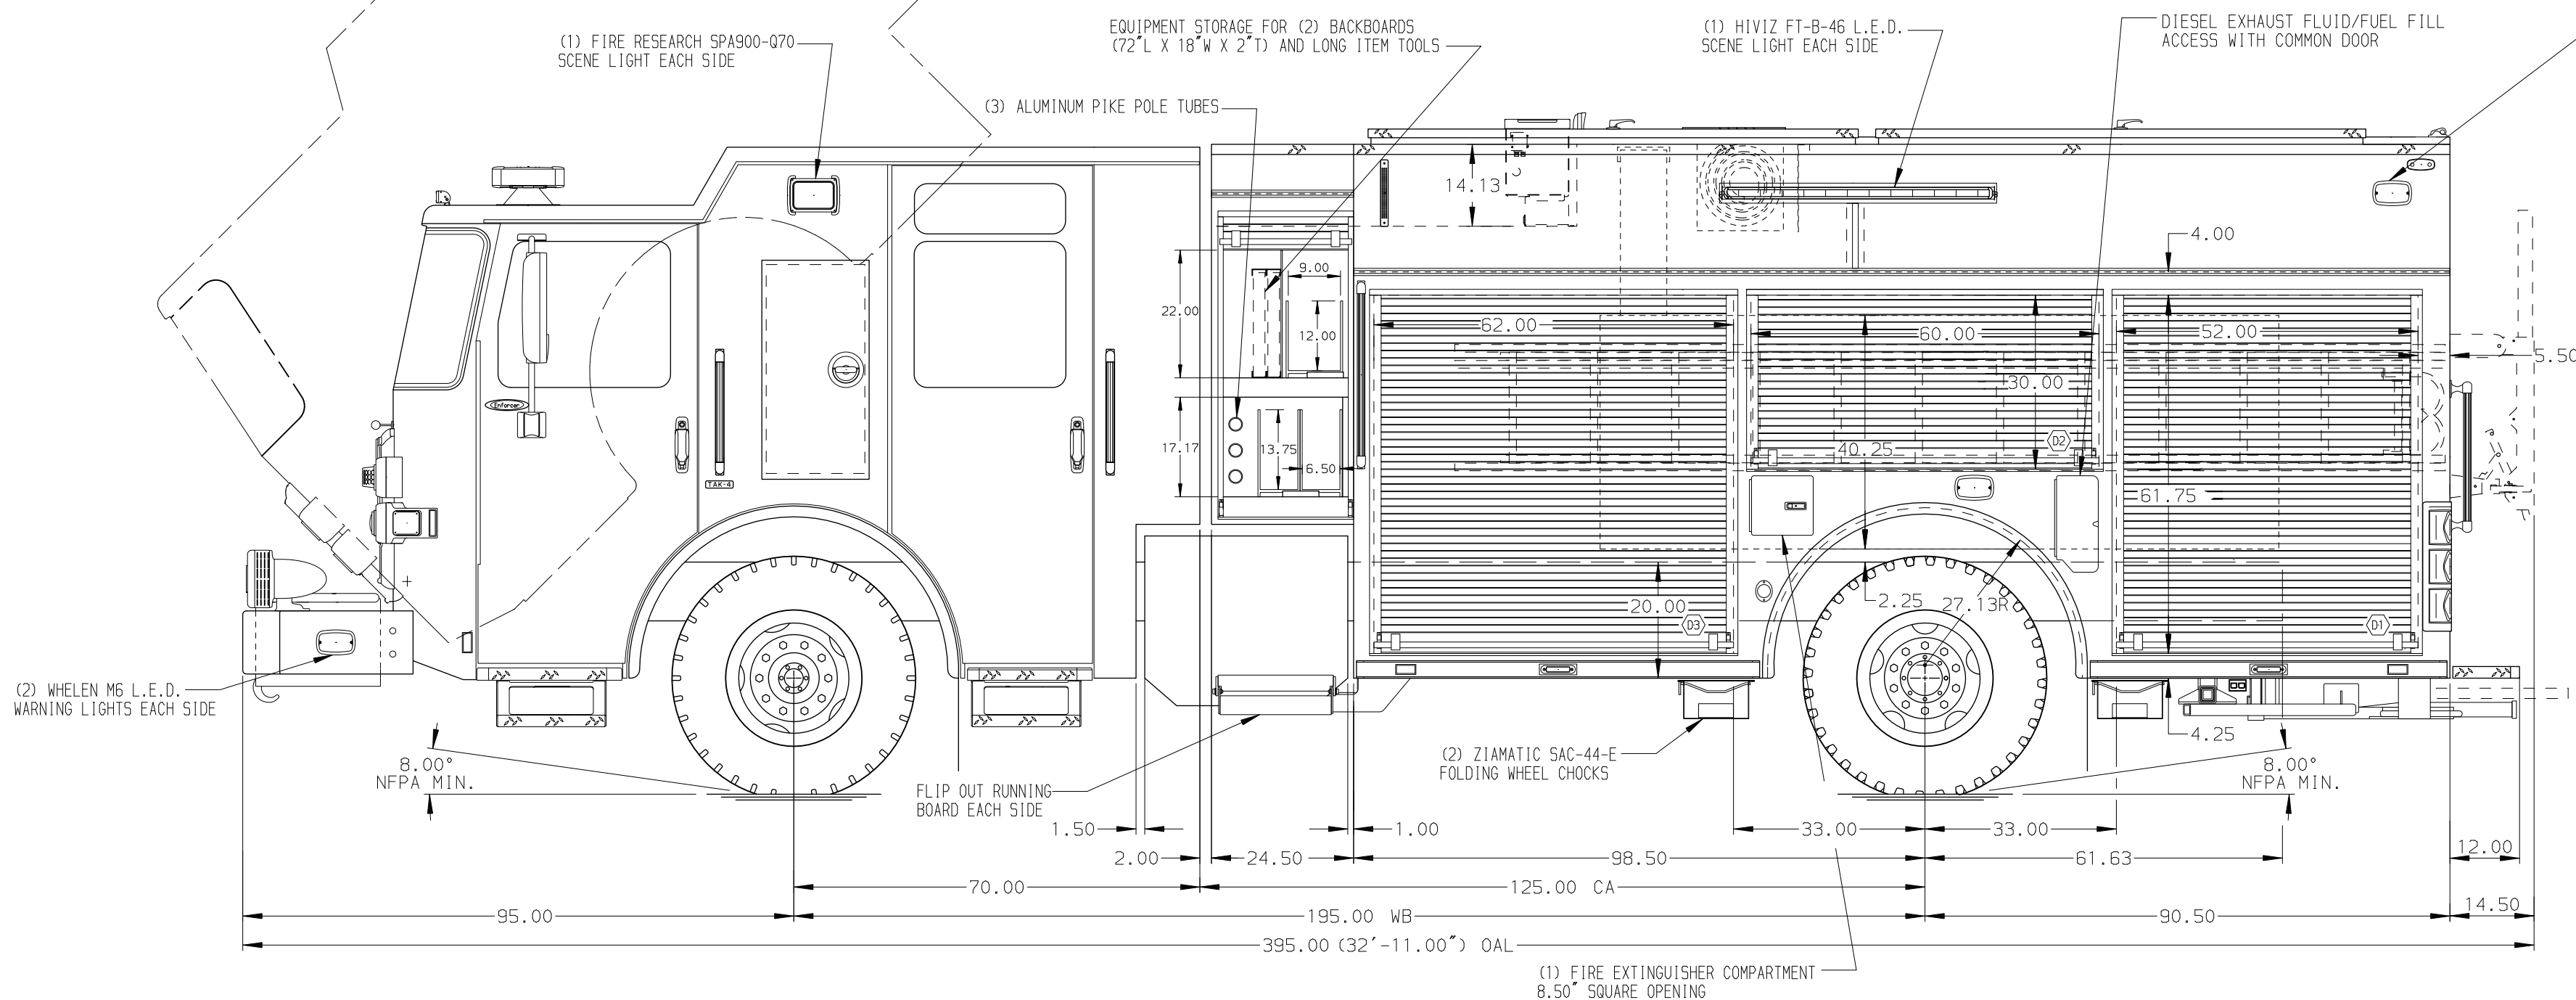

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING ON D.S. STEP WELL
- BATTERY CHARGER LOCATED IN D3
- 120V NEMA STRAIGHT BLADE SHORELINE RECEPTACLE ON D.S. SEAT RISER
- PULL STRAP ON DOOR ON ALL COMPARTMENT DOORS
- ADJUSTABLE FULL WIDTH/DEPTH SHELVES TWO IN D1 AND ONE IN D2, P1, P2, AND P3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN D1, R1, P1, AND P3
- SLIDE-OUT TOOL BOARD WITH PEGBOARD PATTERN IN D3
- ONE 120V NEMA DUPLEX RECEPTACLE LOCATED ?
- ONE 120V NEMA DUPLEX RECEPTACLE LOCATED IN COMPARTMENT ?

CUSTOMER APPROVAL

APPROVED BY: _____
DATE: _____

				CHASSIS DATA
				MAKE
				PIERCE
				MODEL
REV	DATE	BY	CH	ENFORCER



TITLE 1500-D-670P, 650 GAL OF WATER W/ 20 GAL FOAM CELL
189" PUC RESCUE, LADDERS THRU BODY, (3) X-LAYS
FOR LAKE SHORE FIRE DISTRICT
ROCHESTER, NEW YORK

DWG NO. 32457AD

JOB NO.	32457
SCALE	1:24
DATE	
DRAWN BY	LST
CHECKED BY	AZA
SHEET SIZE	D
SHEET NO.	1 OF 1