

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

AXLE, REAR
24,000 lb Dana Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS P

22" Extended Stainless Steel

7010 Enforcer Cab

OMPT, PUMPER, REAR

COMPT, PUMPER, DRIVER SIDE

COMPT, PUMPER PASS. SIDE

52" Control Zone Side Mount

1250 GPM Waterous CSU

CROSSLAYS, 1.50"

CROSSLAYS . 2 . 50 "

SpeedLays Not Required

Generator Not Required





Foam System Not Required

20 Gallon Foam Cell, Not Reduced Water
10 Gallon Foam Cell, Not Reduced Water


Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

10. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
11. PAC TRAC INSTALLED ON FLOOR OF COMPARTMENT PER SHOP ORDER
12. PAC TRAC INSTALLED ON REAR WALL PER SHOP ORDER

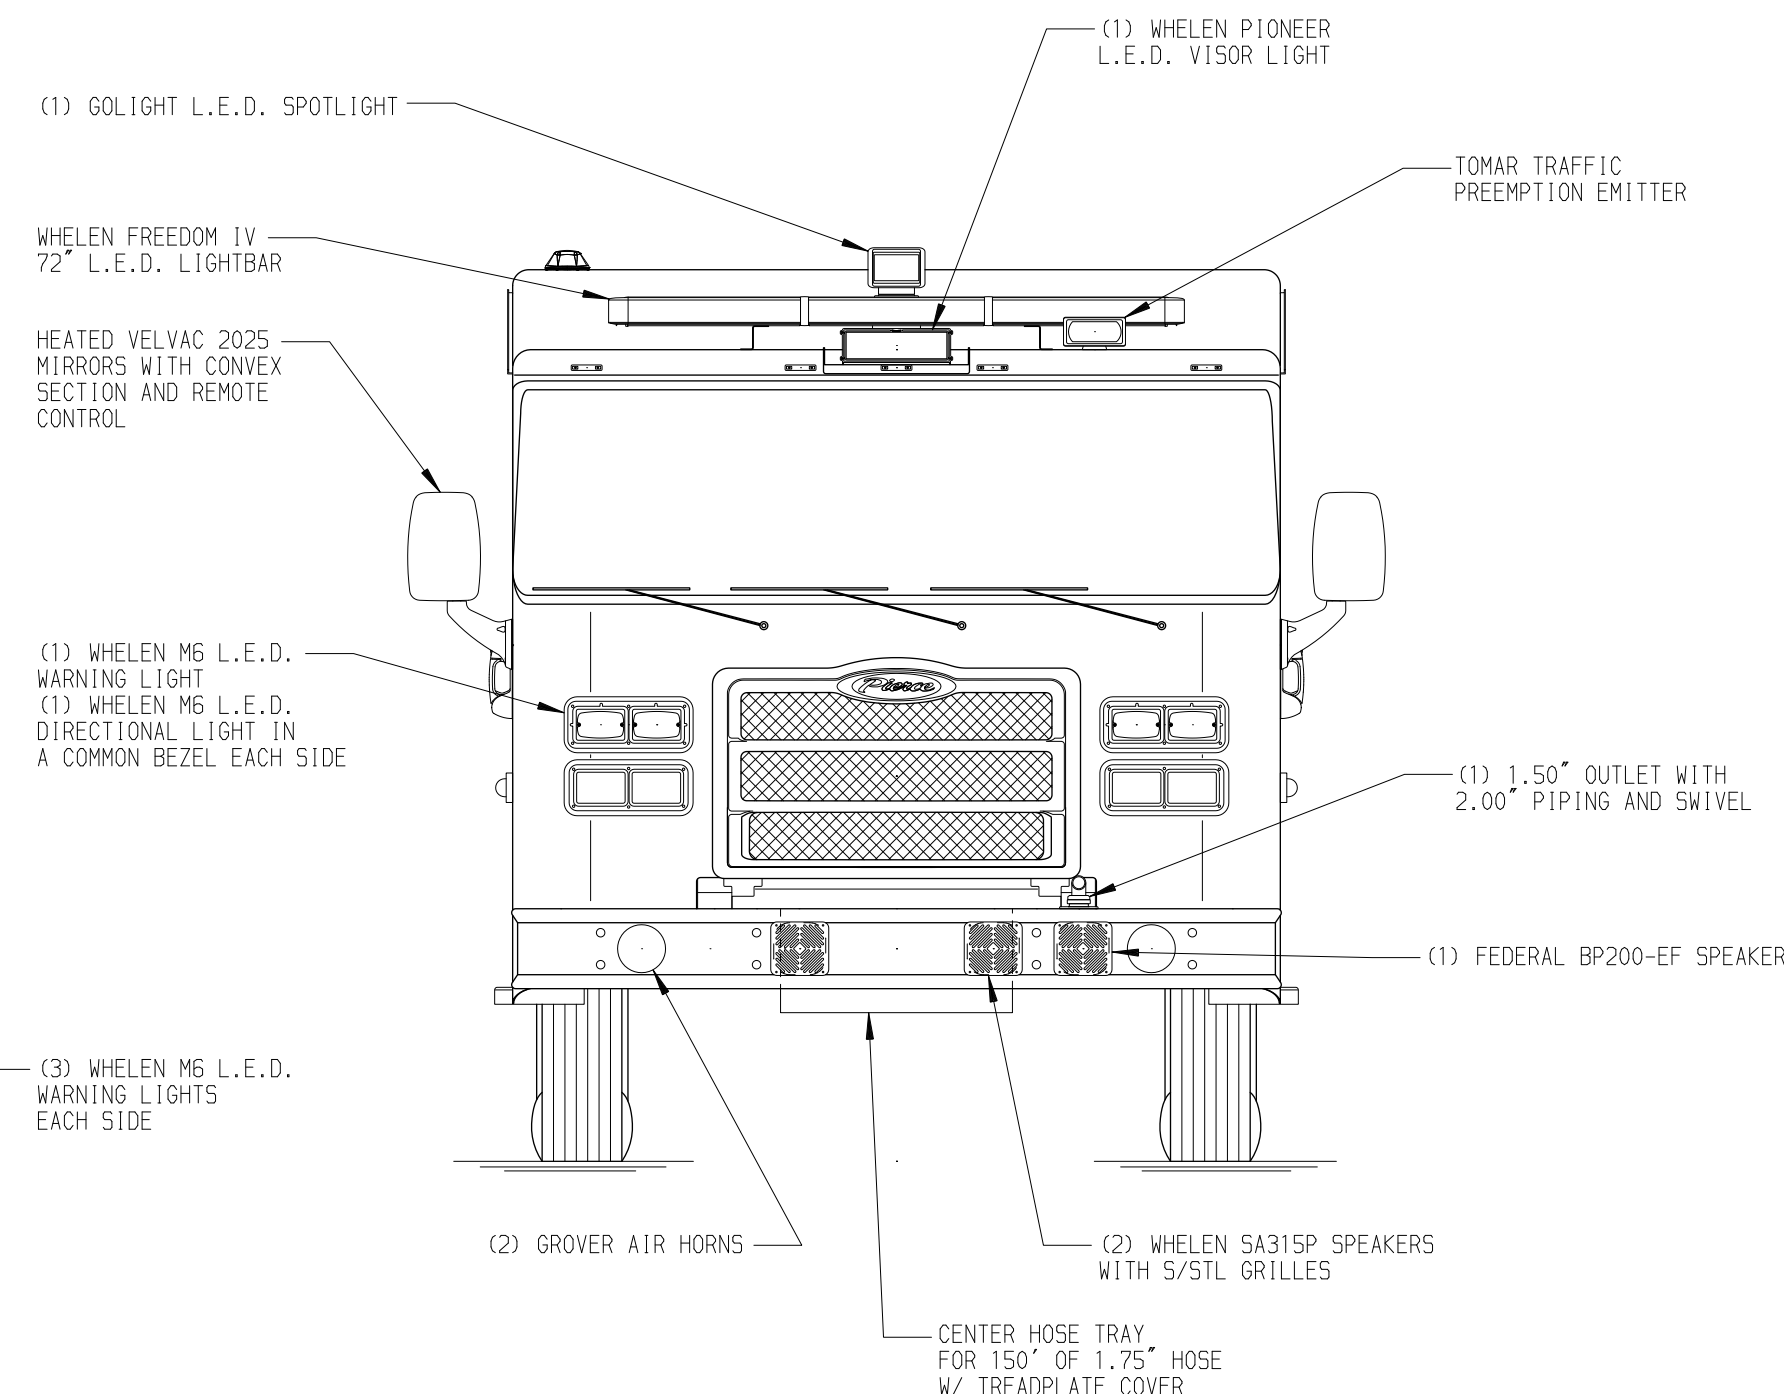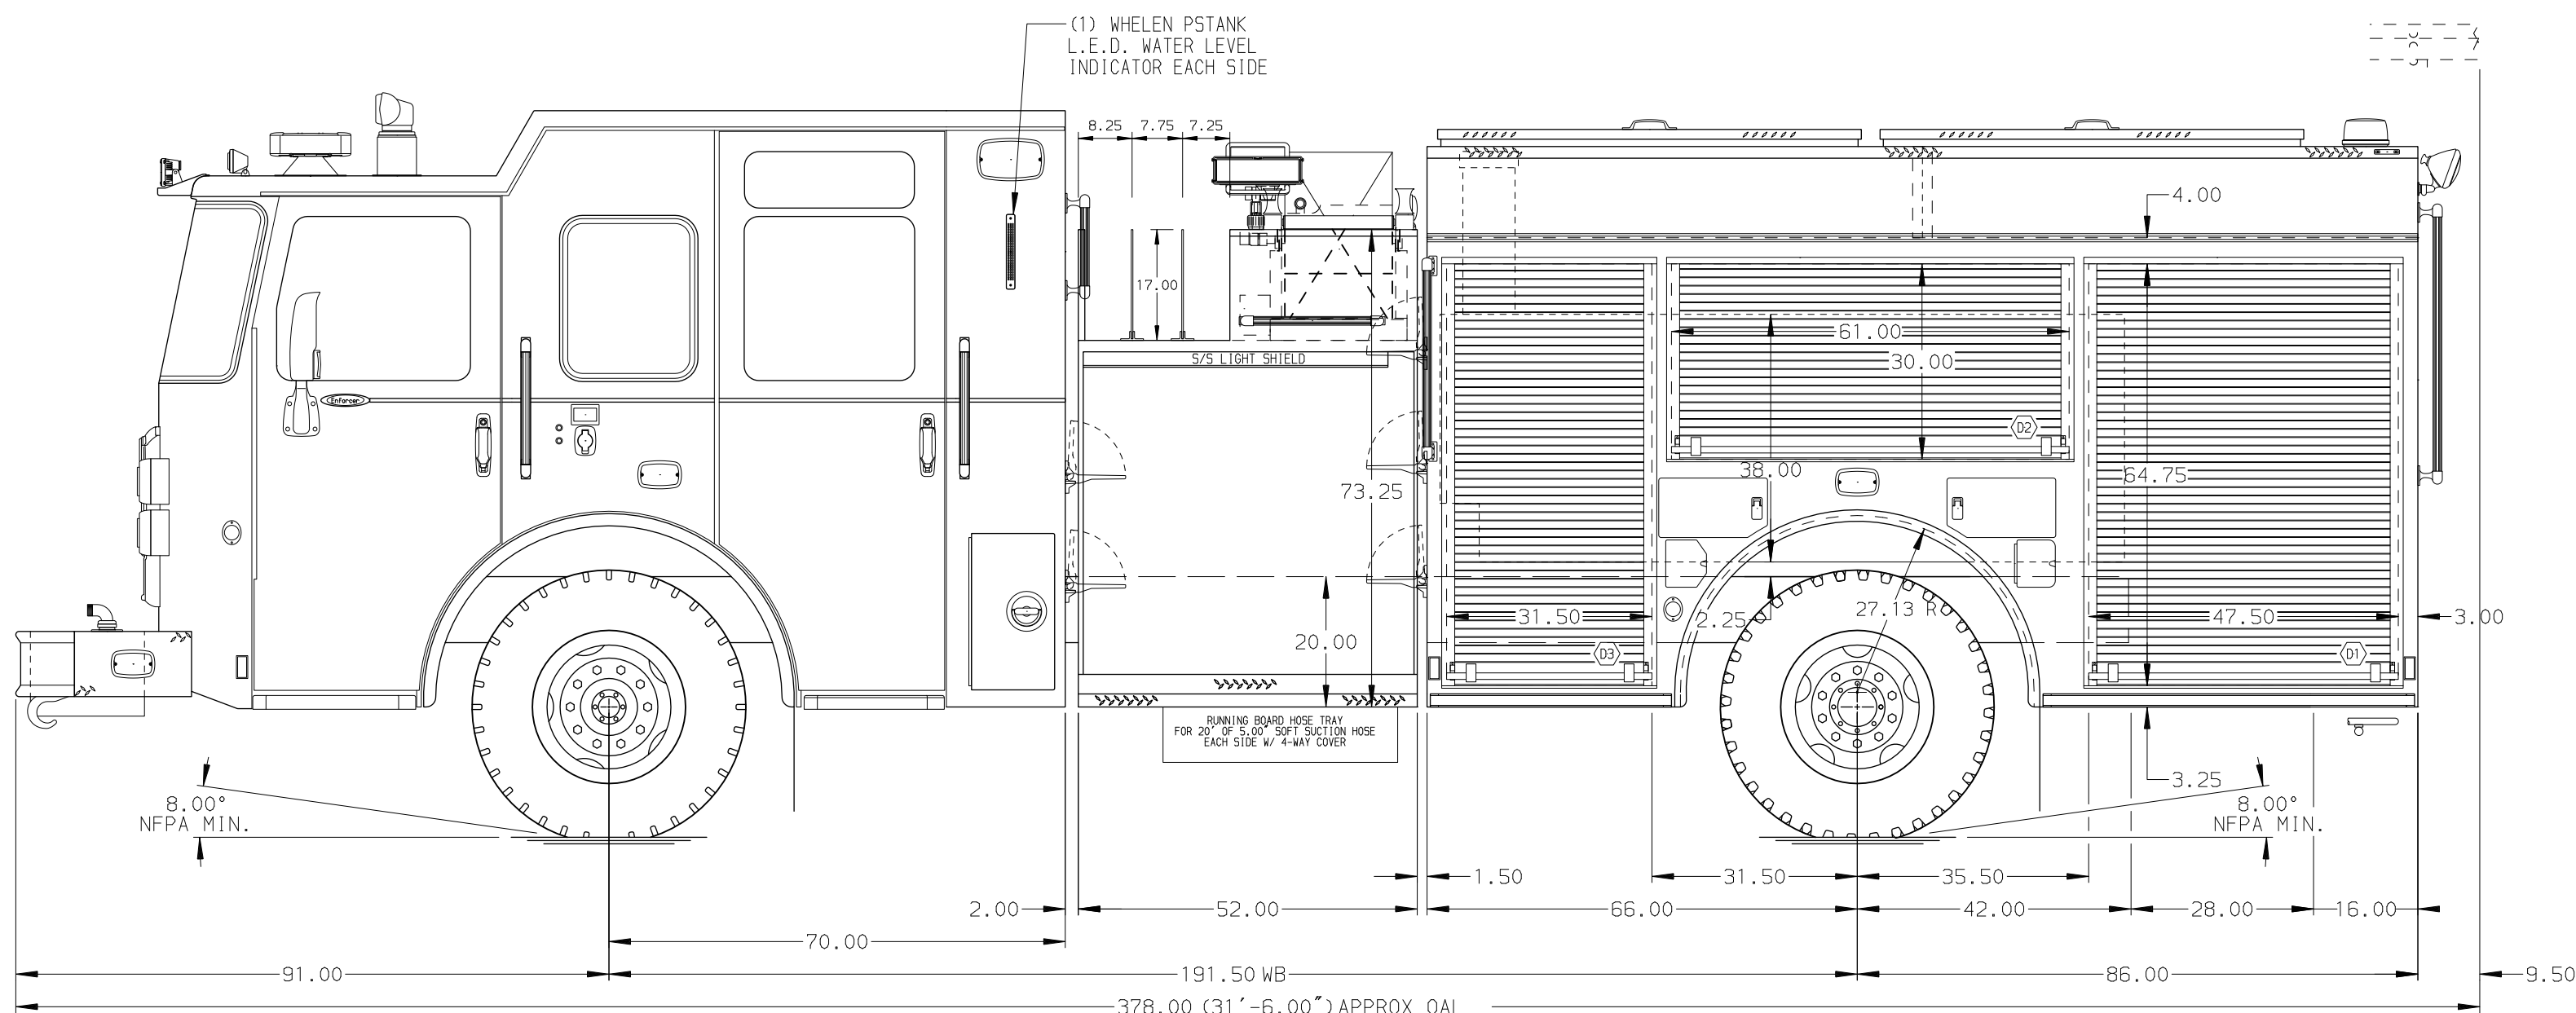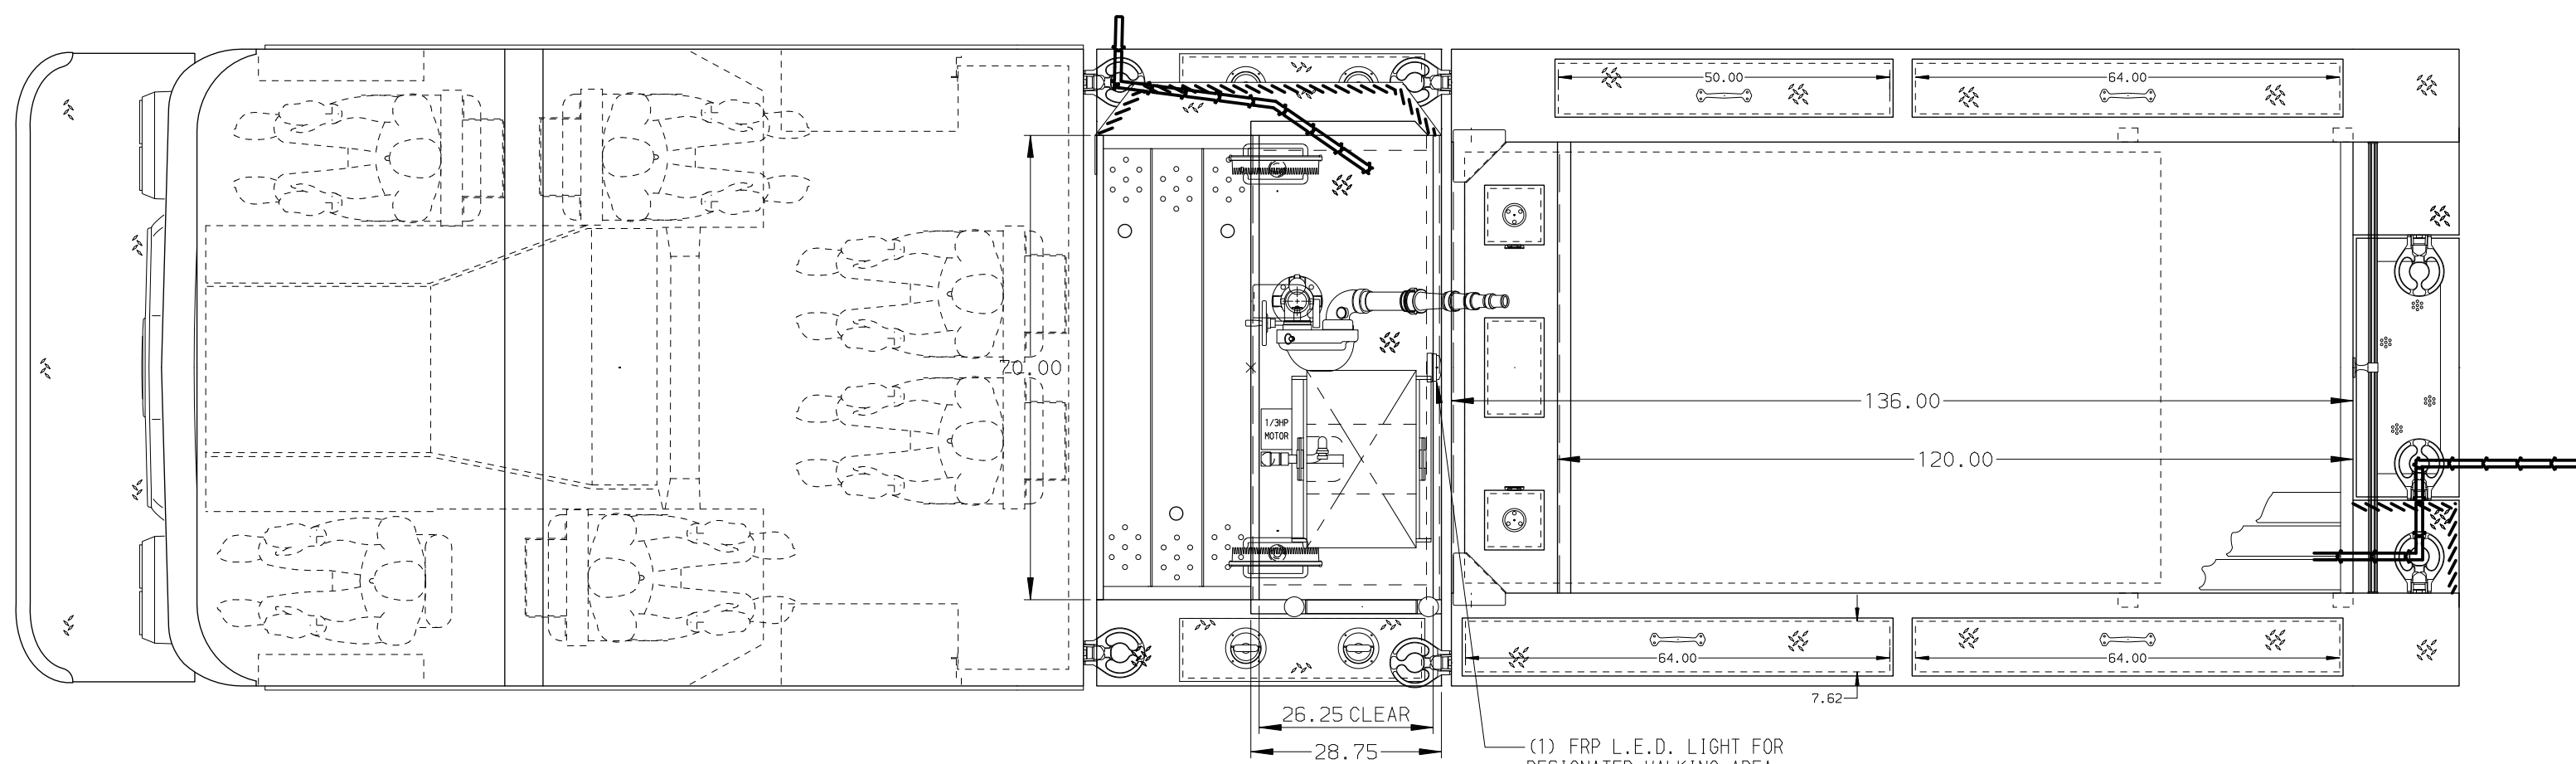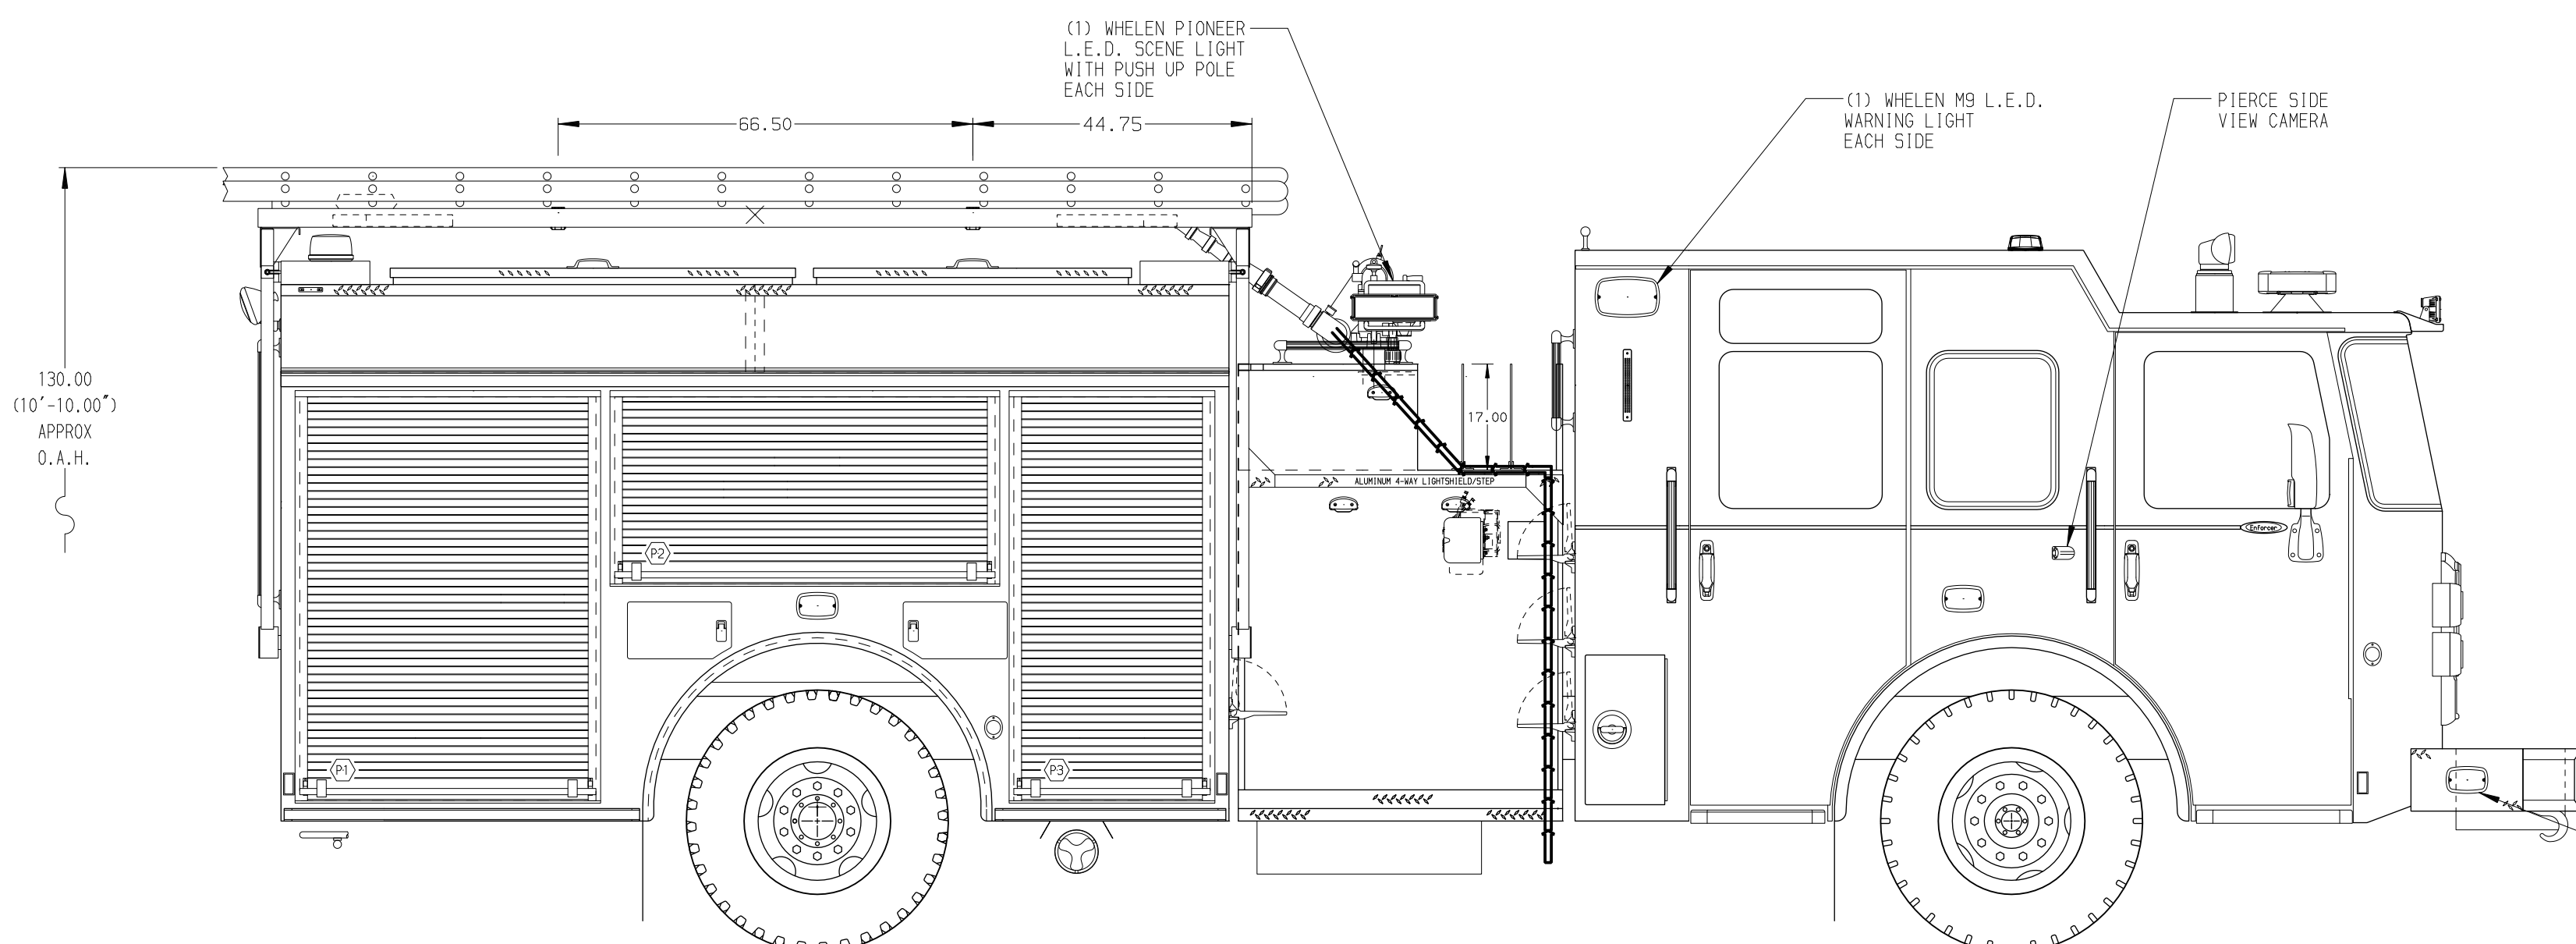

HOSEBED CAPACITY	
BED 1	
800' OF 5.00" D.J. POLY HOSE	
BED 2	
500' OF 2.50" D.J. POLY HOSE	
BED 3	
500' OF 2.50" D.J. POLY HOSE	
BED 4	
200' OF 2.50" D.J. POLY HOSE	
BED 5	
OPEN AREA	

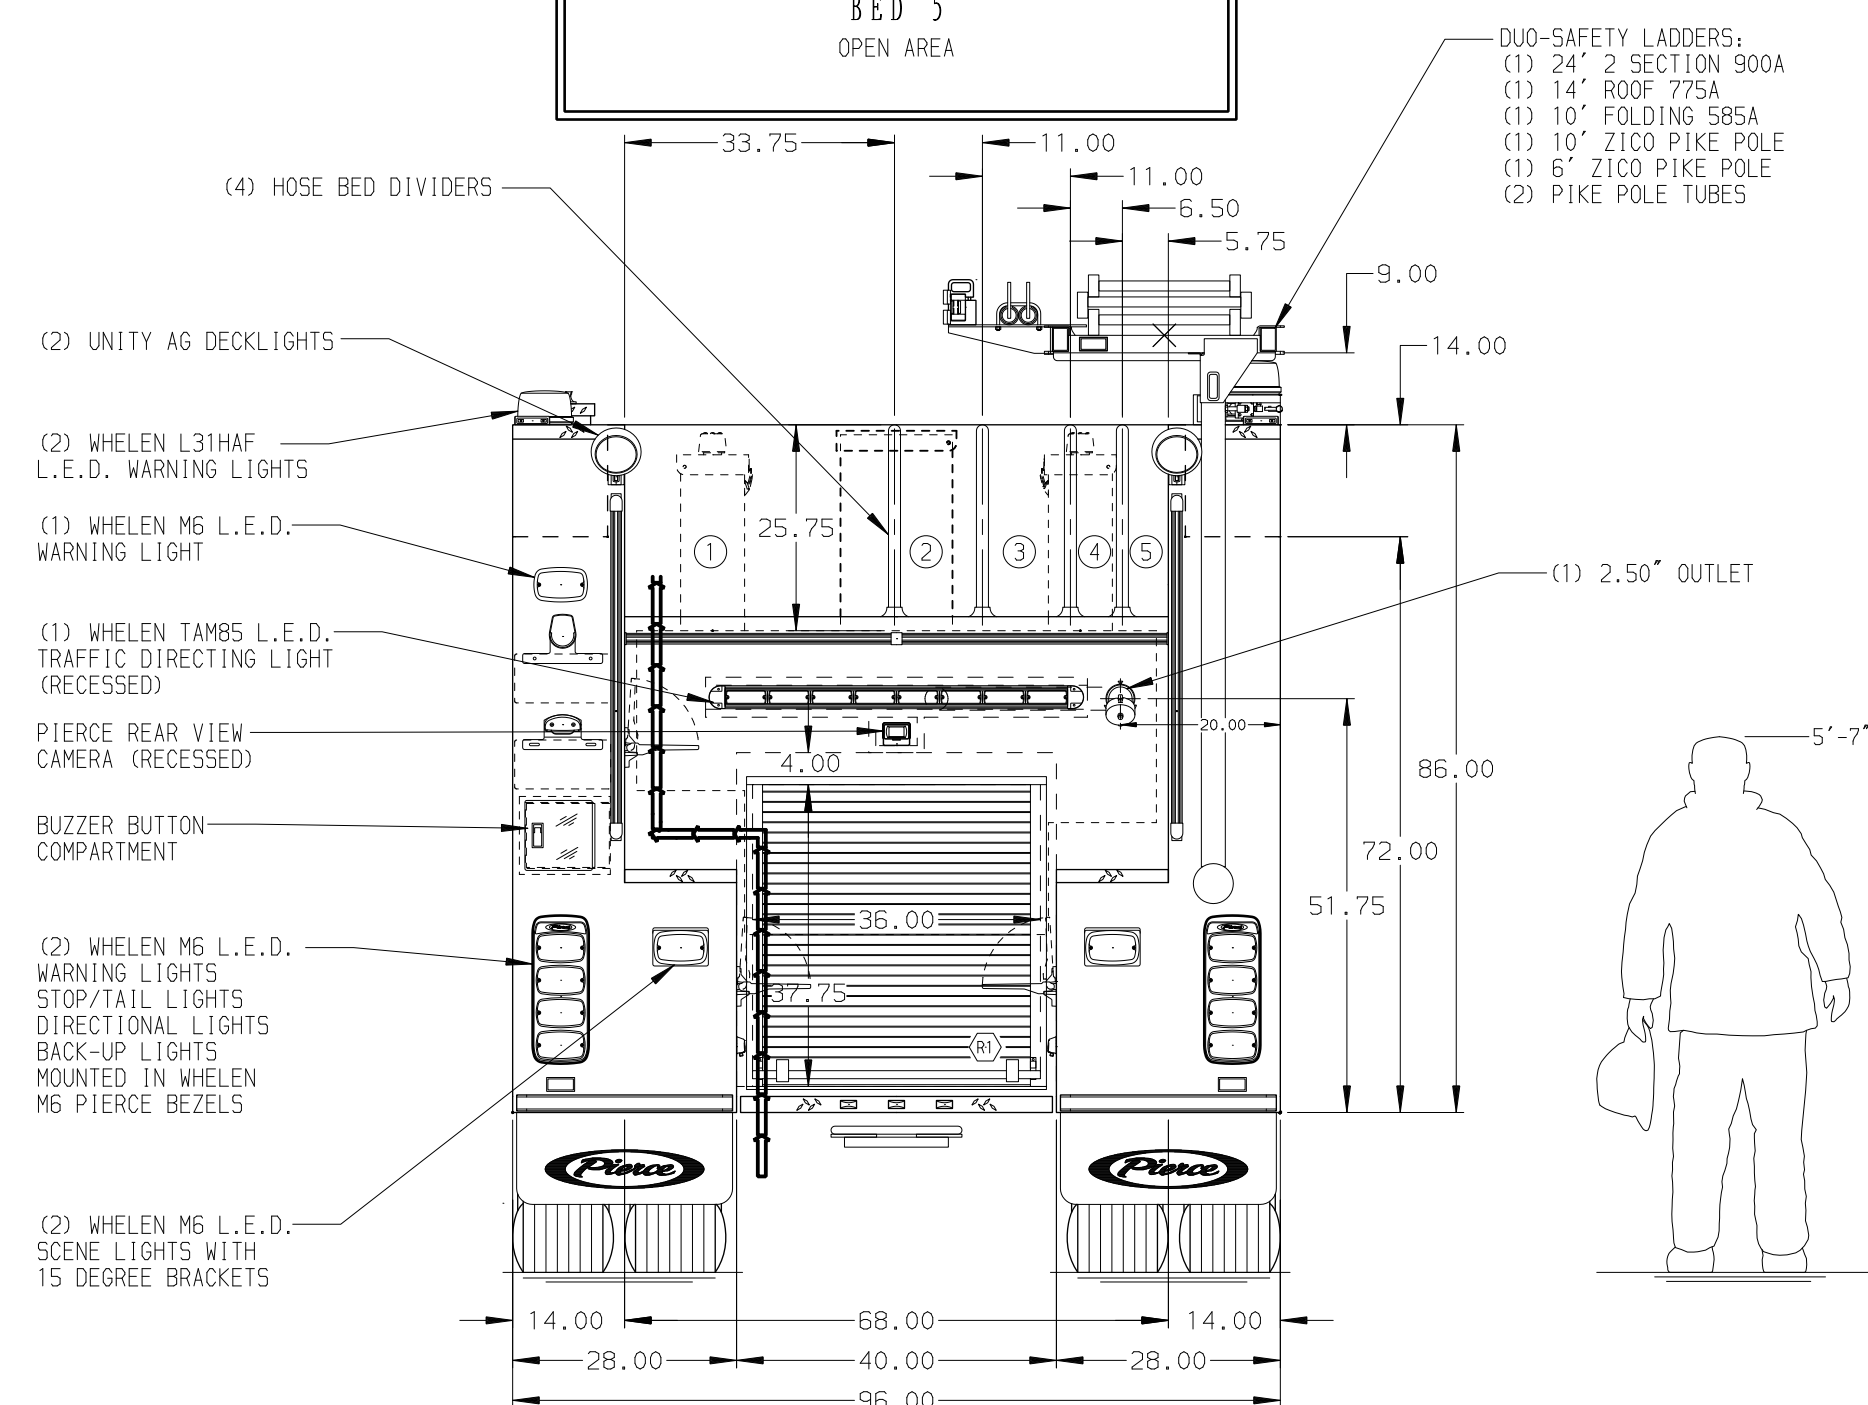

CUSTOMER APPROVAL APPROVED BY: _____ DATE: _____					 MANUFACTURING INC.		JOB NO.	32573 01-04
							SCALE	DATE
				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	DRAWN BY	
				MAKE	FOR	-	COL	27MAR18
				PIERCE		City of Tucson	CHECKED BY	
				MODEL		-	SHE	28MAR18
	-	-	-		DWG	32573AD	SHEET SIZE	SHEET NO.
REV	DATE	BY	CH	ENFORCER	NO.		D	1 OF 1