
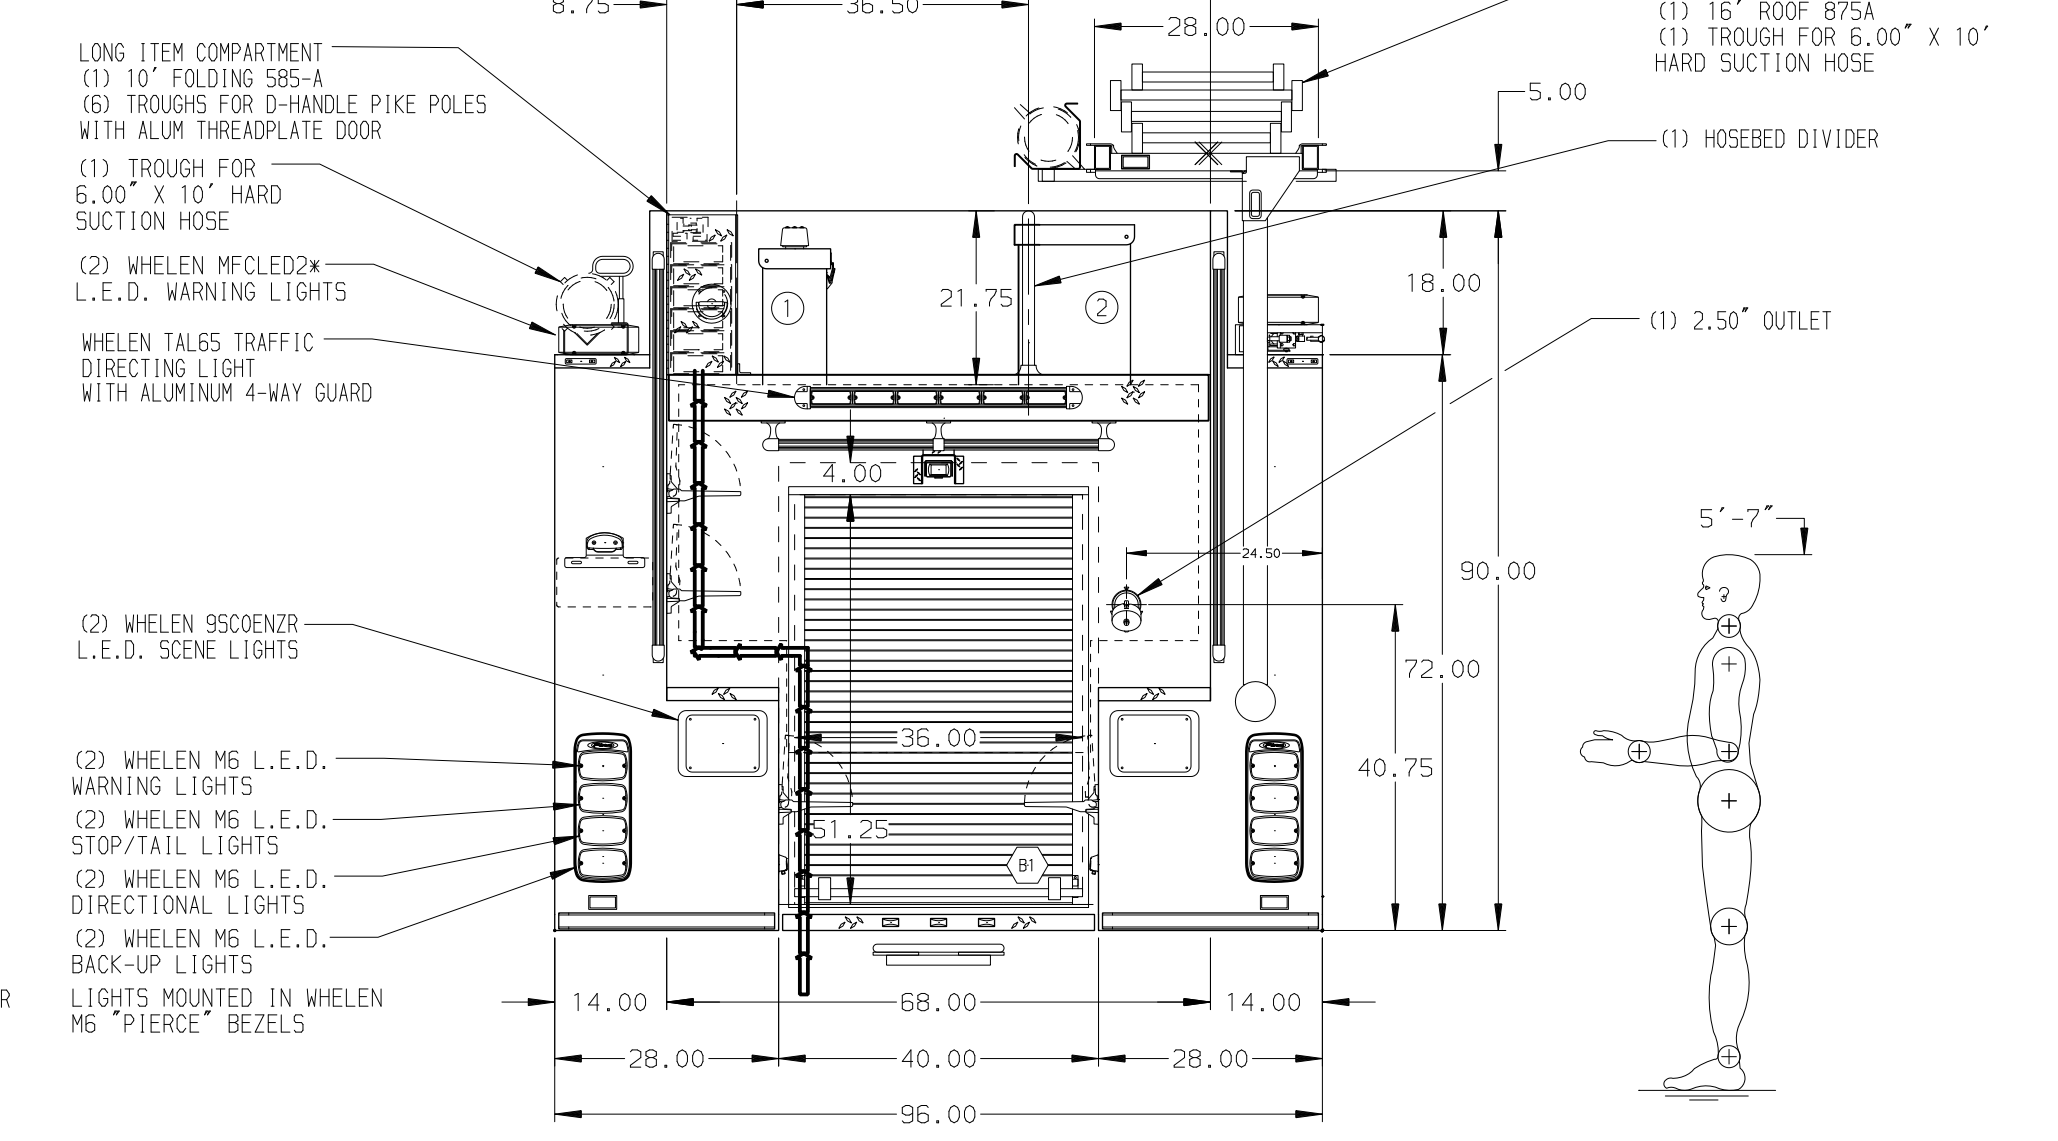


HOSEBED CAPACITIES

① 900' OF 5.00" HOSE

② 900' OF 3.00" HOSE

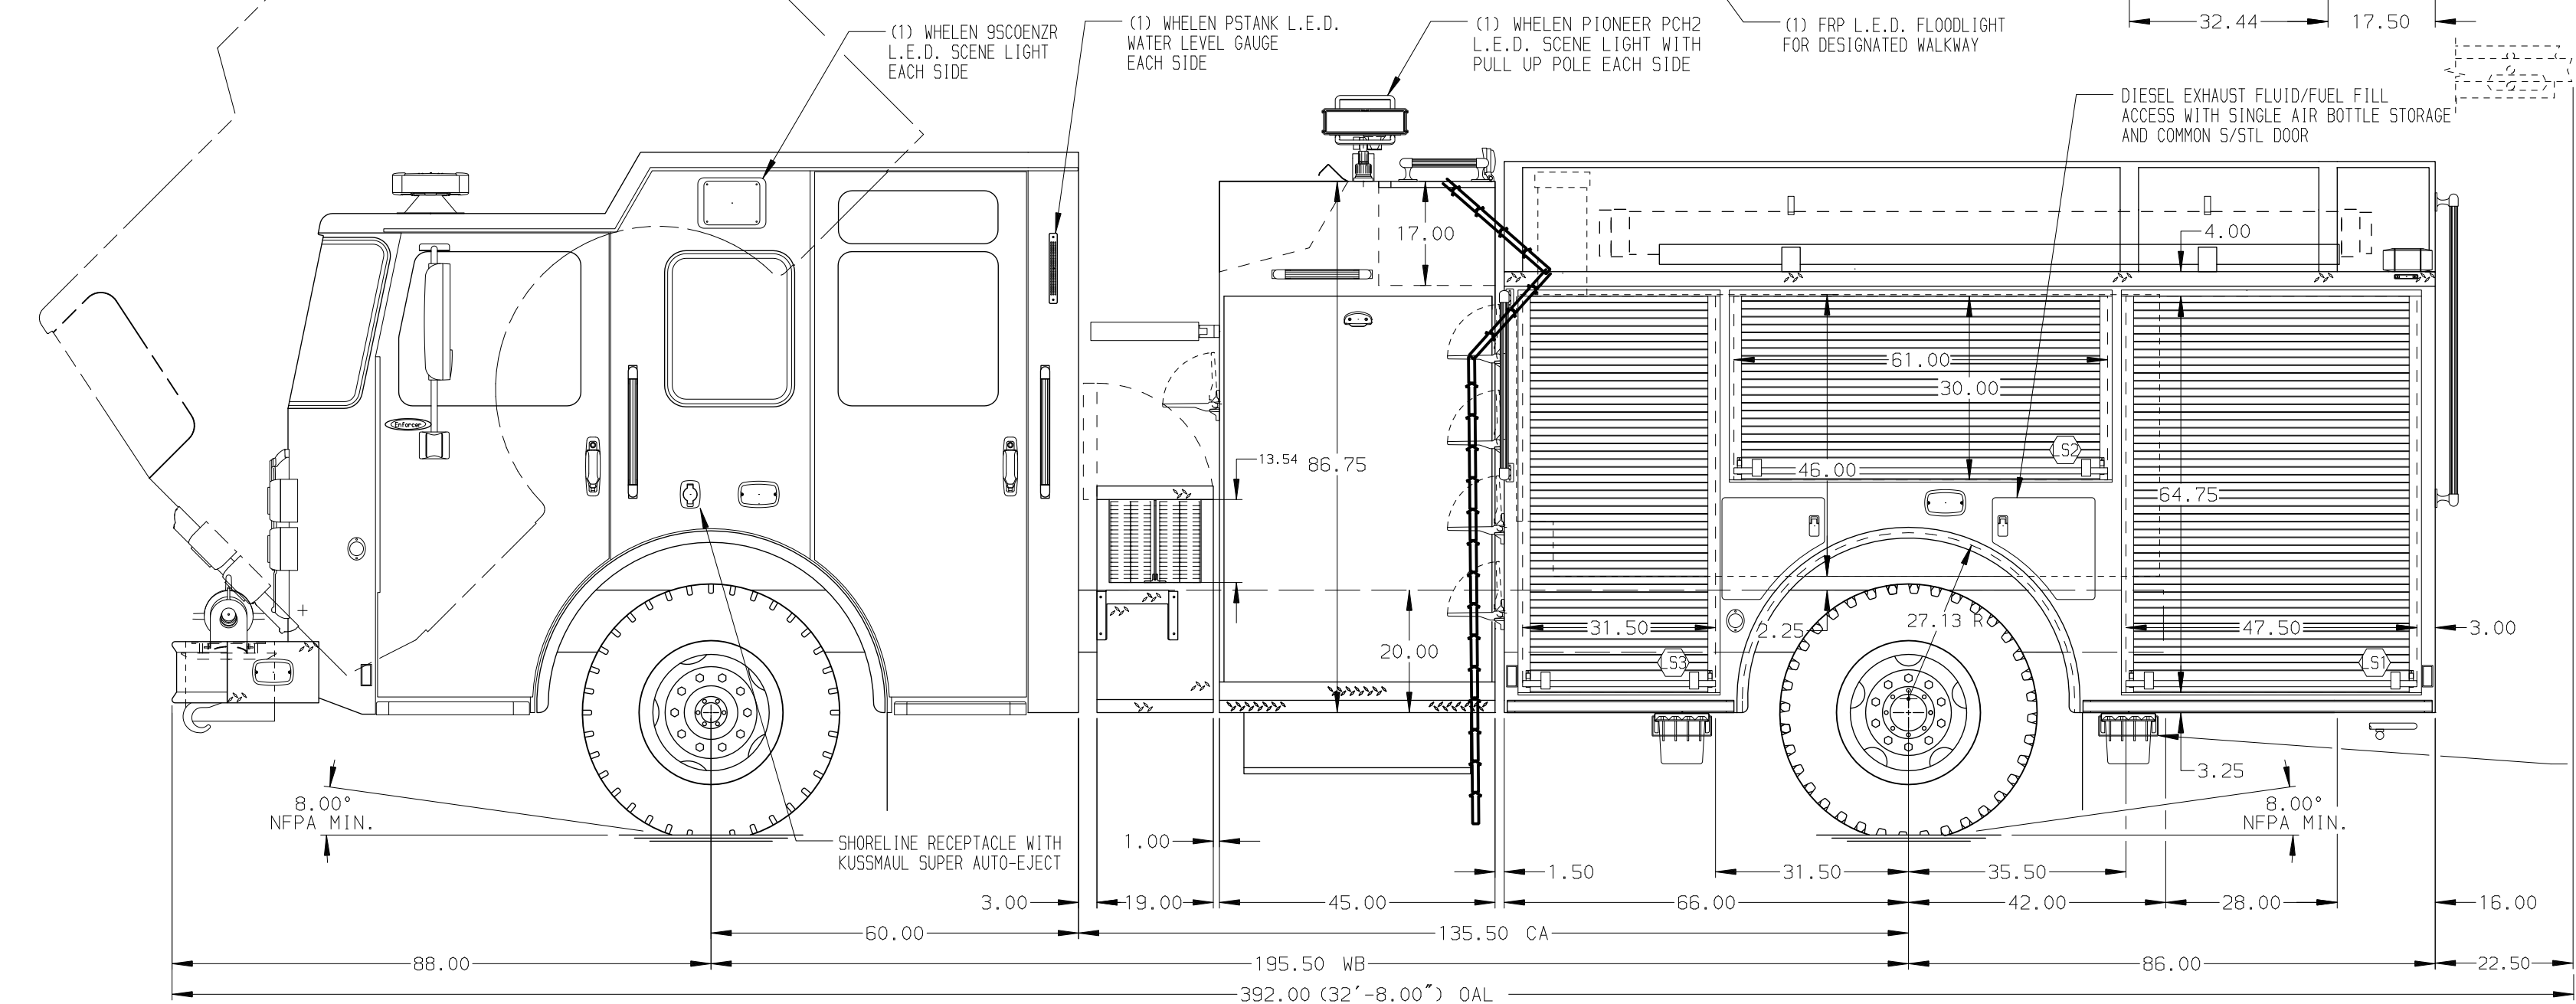

ALUMINUM BODY

MAXIMUM O.A.L. 373.50"

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED ON THE DRIVER SIDE PUMP PANEL
- INSTA-CHAIN AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGER INDICATOR LOCATED AT DRIVER'S SIDE STEP AREA
- HOT WATER HEATER IN PUMP COMPARTMENT
- ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT B1; TWO IN L51, L53, R51 & R53
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT L51, R53 & B1
- ROLLED HOSE STORAGE RACK IN COMPARTMENT RS2

REV	DATE	BY	CH	ENFORCER
11SEP18	LME	EFA		CHASSIS DATA
10SEP18	LME	EFA		MAKE
29JUN18	MMF	NPE		PIERCE
				MODEL

		JOB NO.	32634
		SCALE	DATE
TITLE	1250-D-1000P W/20 GAL FOAM, 152" BODY FH FDLER DS/PS 45" TOP MOUNT, (2) XLAYS, HEAT ENCLOSURE, DELUGE	DRAWN BY	LME
FOR	SHERRILL FIRE DEPARTMENT SHERRILL, IOWA	CHECKED BY	NPE
DWG NO.	32634AD	SHEET SIZE	D
		SHEET NO.	1 OF 1