

PUMPER

BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

19,500 Lb TAK-4 Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Painted Steel

CAB

7010 Enforcer Cab

BODY

WATER TANK

750 Gallon Water Tank

COMPT, PUMPER, REAR

44.50" FF RollUp, 25.88" Deep Rear Compt, FLush Rear

COMPT, PUMPER, DRIVER SIDE

152" RollUp Full Height Front & Rear FDler

COMPT, PUMPER PASS. SIDE

152" RollUp Full Height Front & Rear FDler

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Top Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Troy Std. Capacity

GENERATOR


Generator Not Required

Foam System

Husky 12 Dual Agent Foam System

Foam Cell

20 Gallon Foam Cell, Reduced Water
30 Gallon Foam Cell, Reduced Water

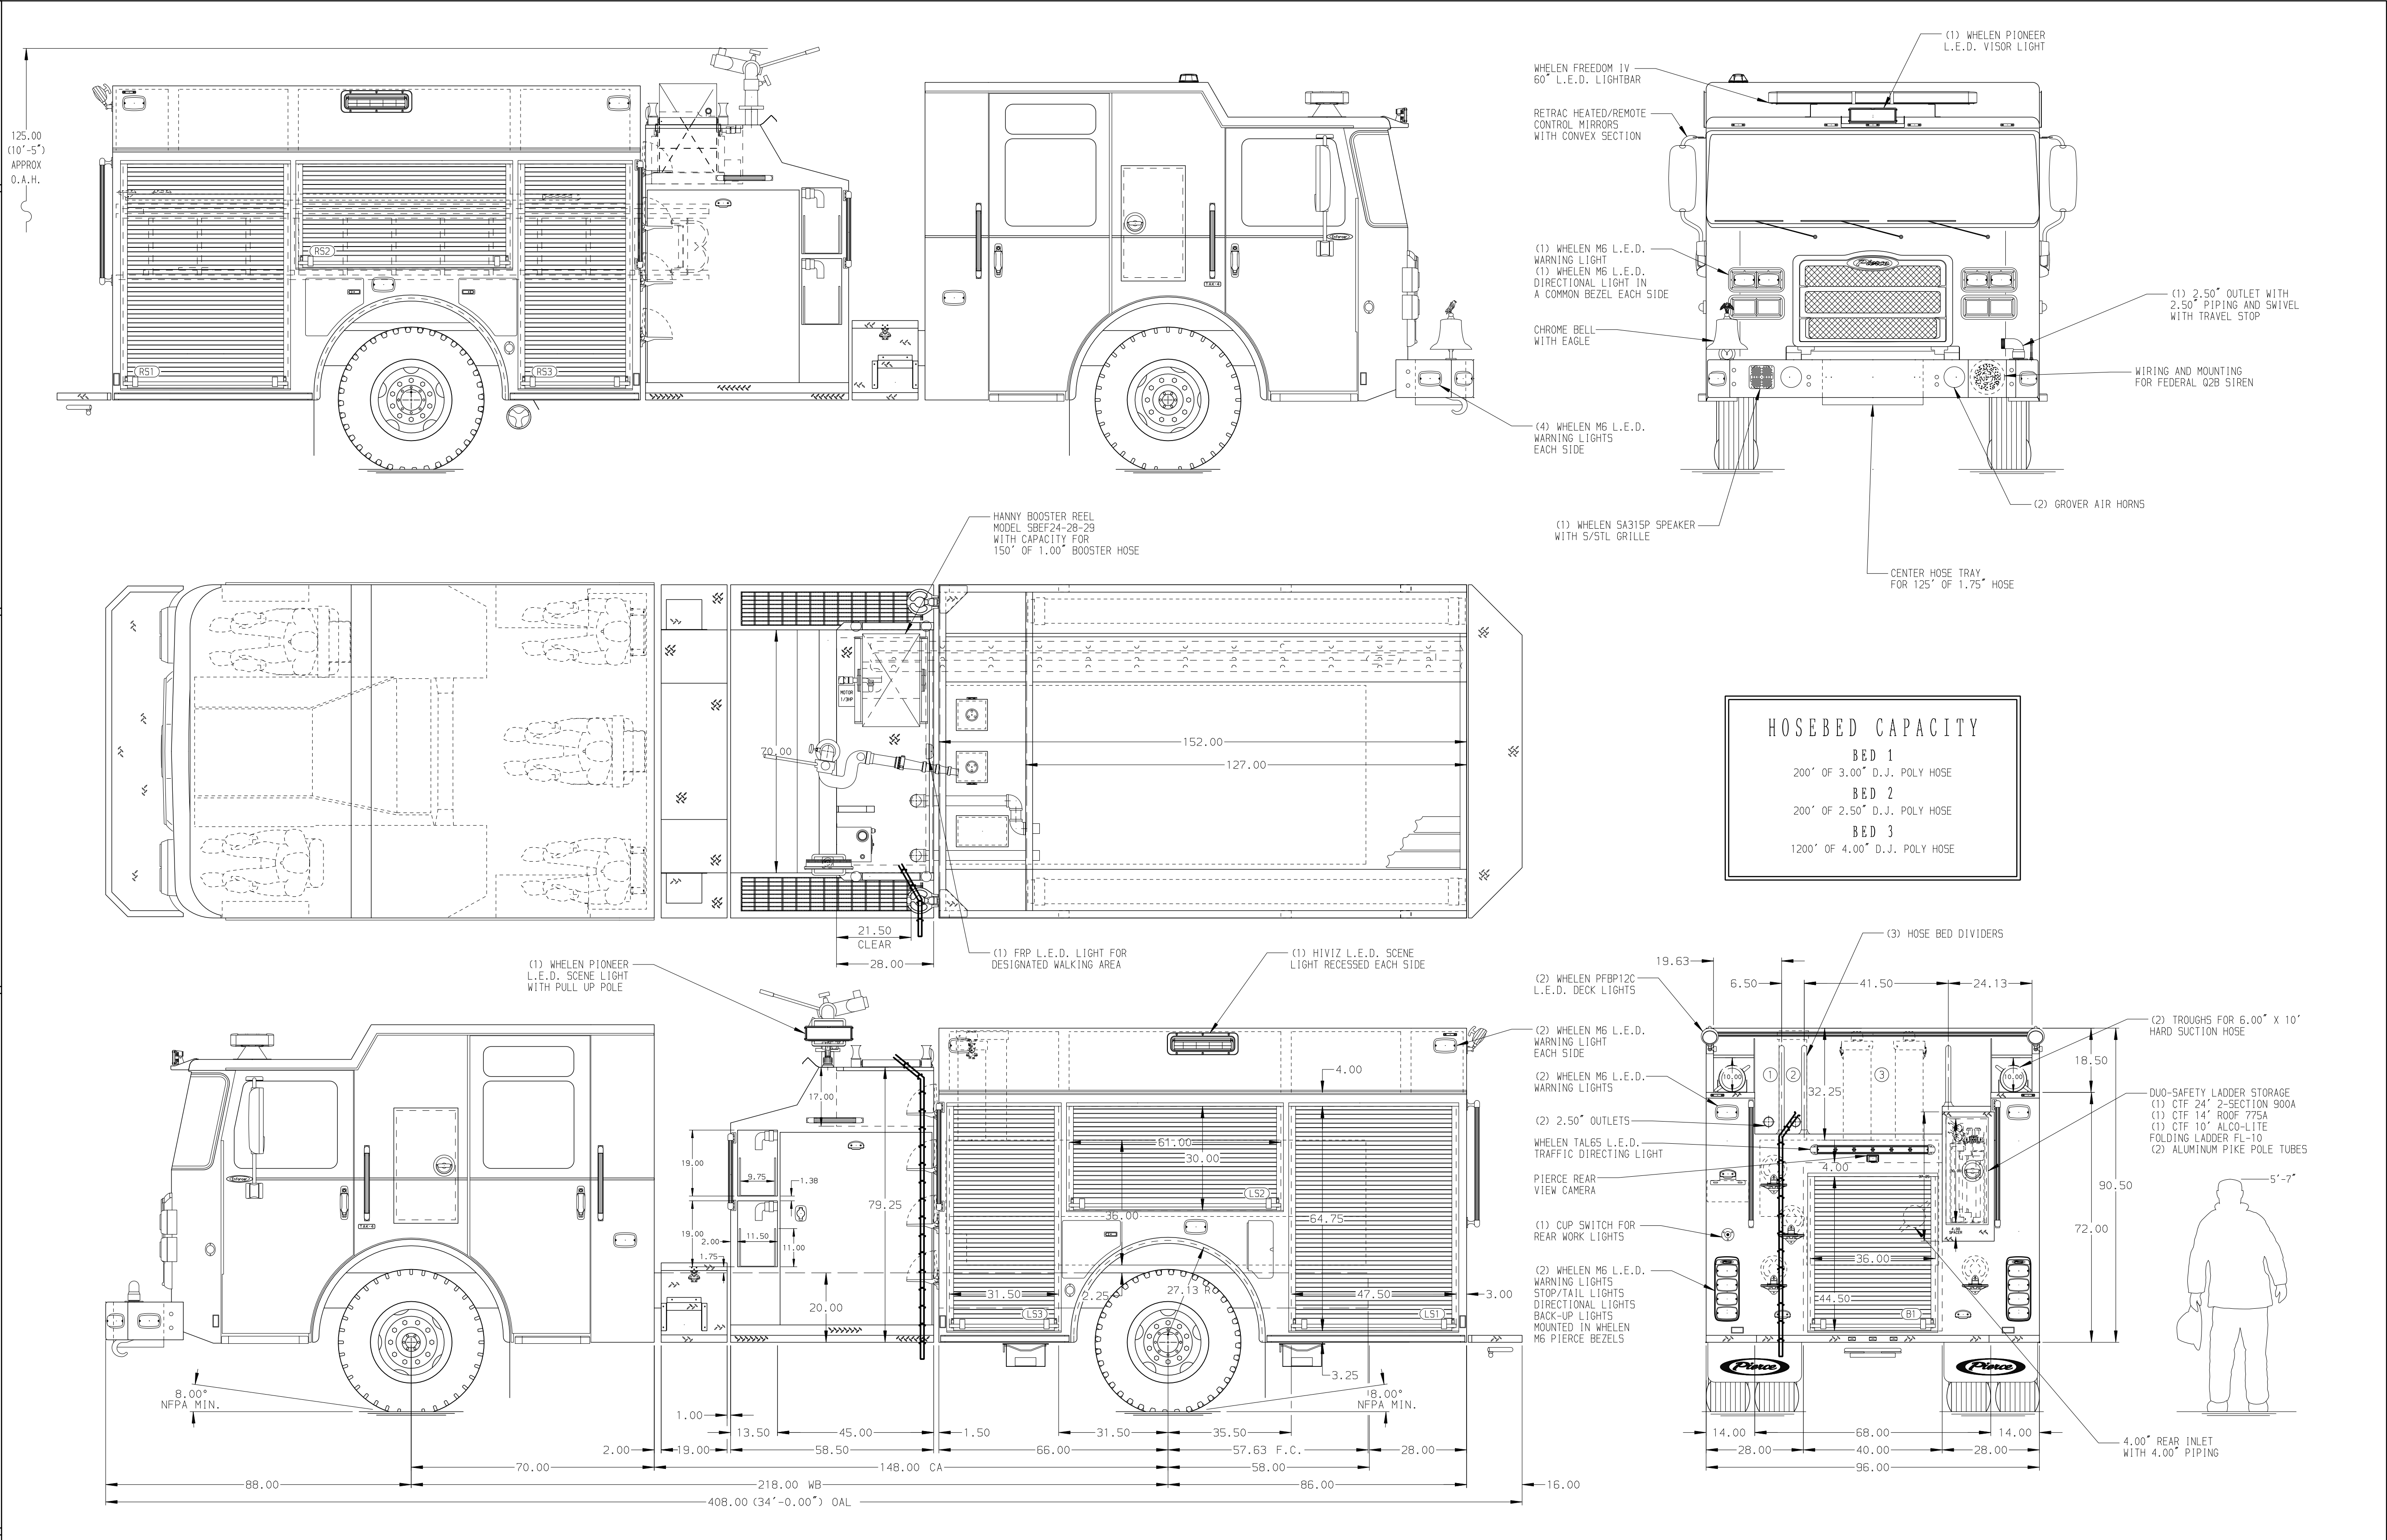

HOSEBED CAPACITY	
BED 1	200' OF 3.00" D.J. POLY HOSE
BED 2	200' OF 2.50" D.J. POLY HOSE
BED 3	1200' OF 4.00" D.J. POLY HOSE

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE PUMP PANEL
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGE LOCATED IN COMPARTMENT PER SHOP ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
- SEVEN ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
- ALUMINUM PEGBOARD LOCATED PER SHOP ORDER

REV	DATE	BY	CH	ENFORCER
05NOV18	COL	KBO		
04OCT18	COL	KBO		

Pierce MANUFACTURING INC.		JOB NO.	32875
TITLE		SCALE	1:24
FOR		DRAWN BY	COL
DWG NO.		CHECKED BY	KBO
		SHEET SIZE	D
		SHEET NO.	1 OF 1

Pierce Pumper Approval Drawing
Yukon Fire Department

32875AD