
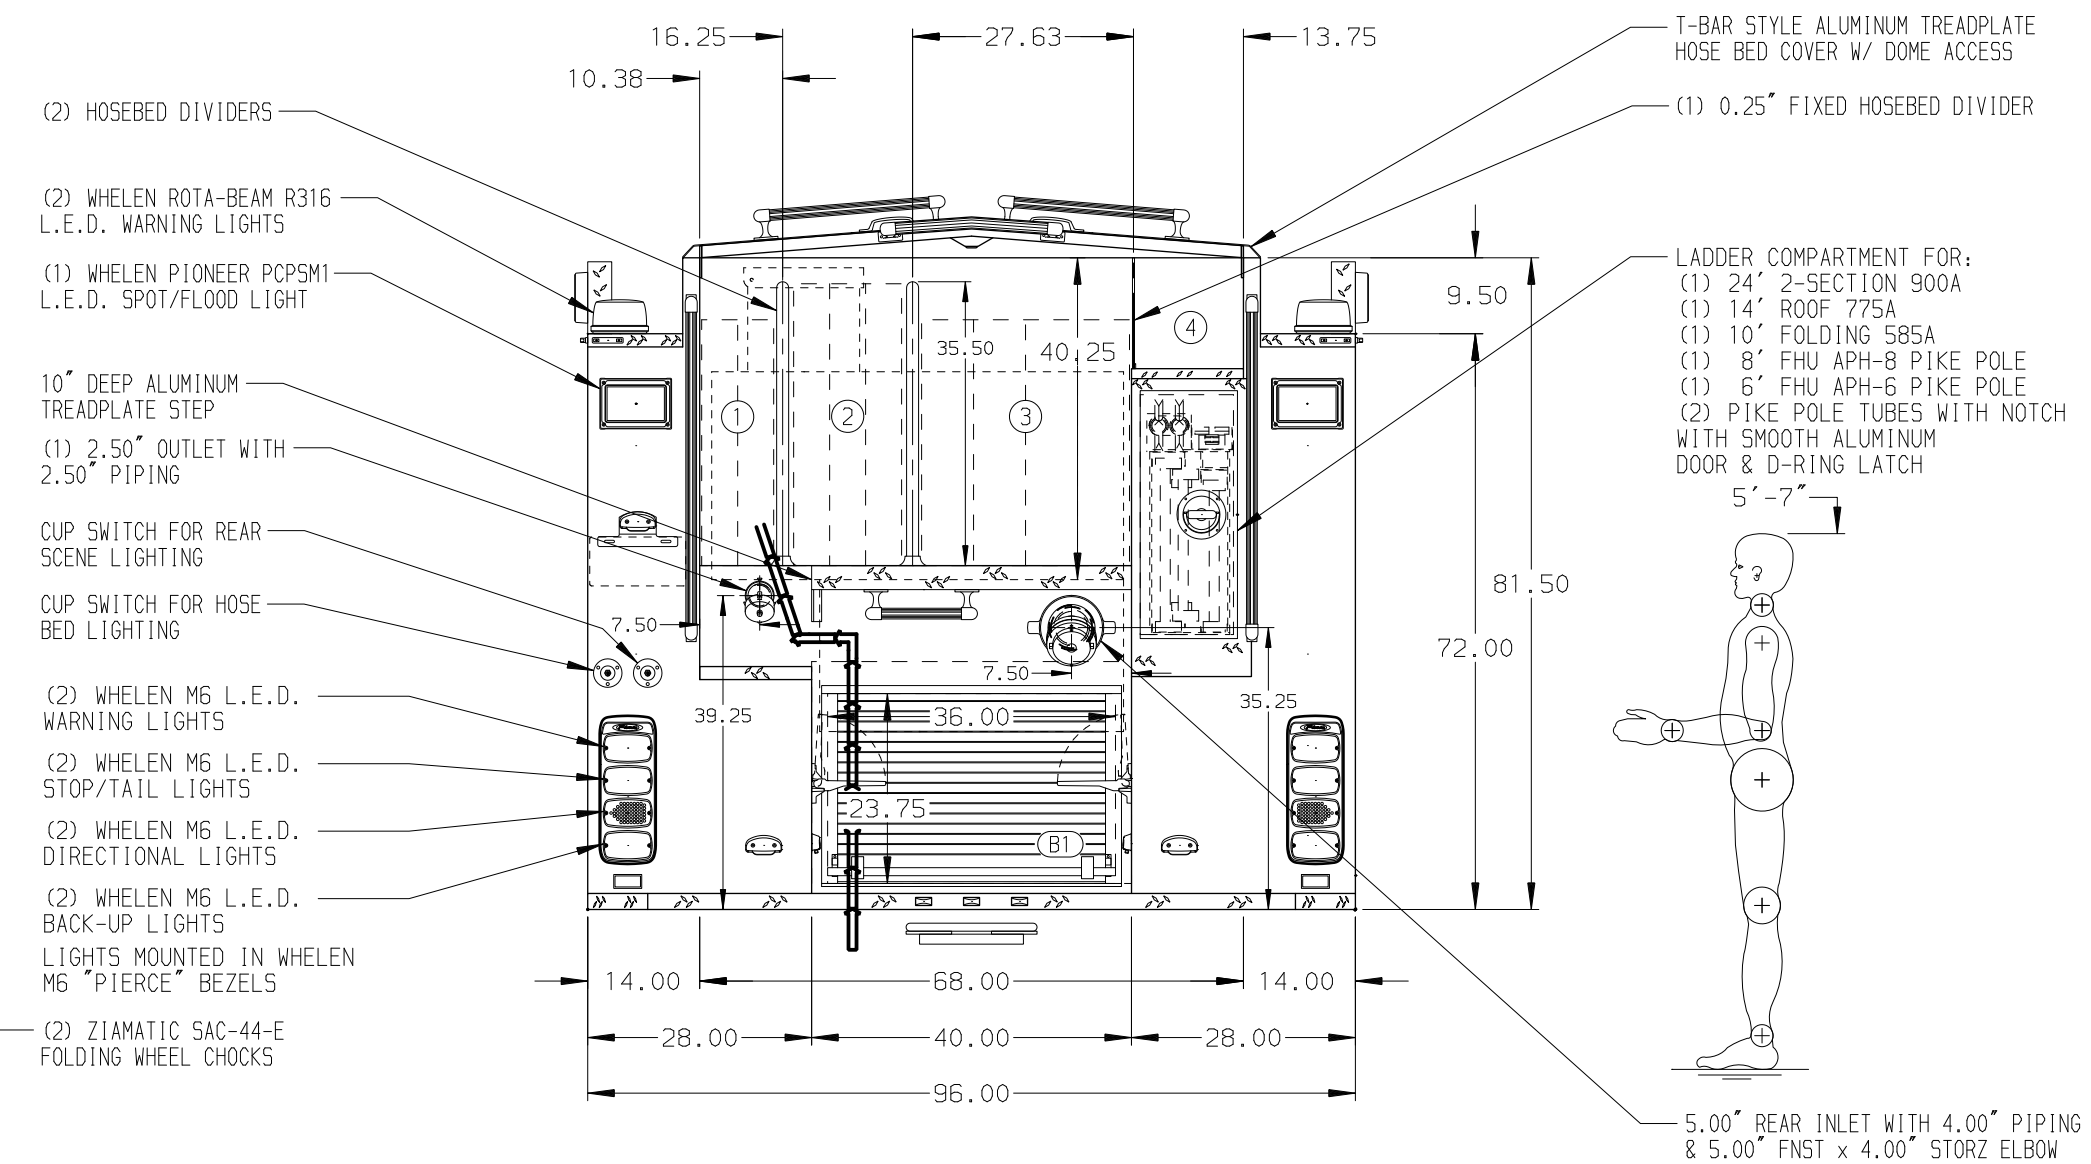


HOSEBED CAPACITIES

- 500' OF 2.50" D.J. HOSE
- 850' OF 2.50" D.J. HOSE
- 1000' OF 4.00" D.J. HOSE
- EMPTY HOSE BED

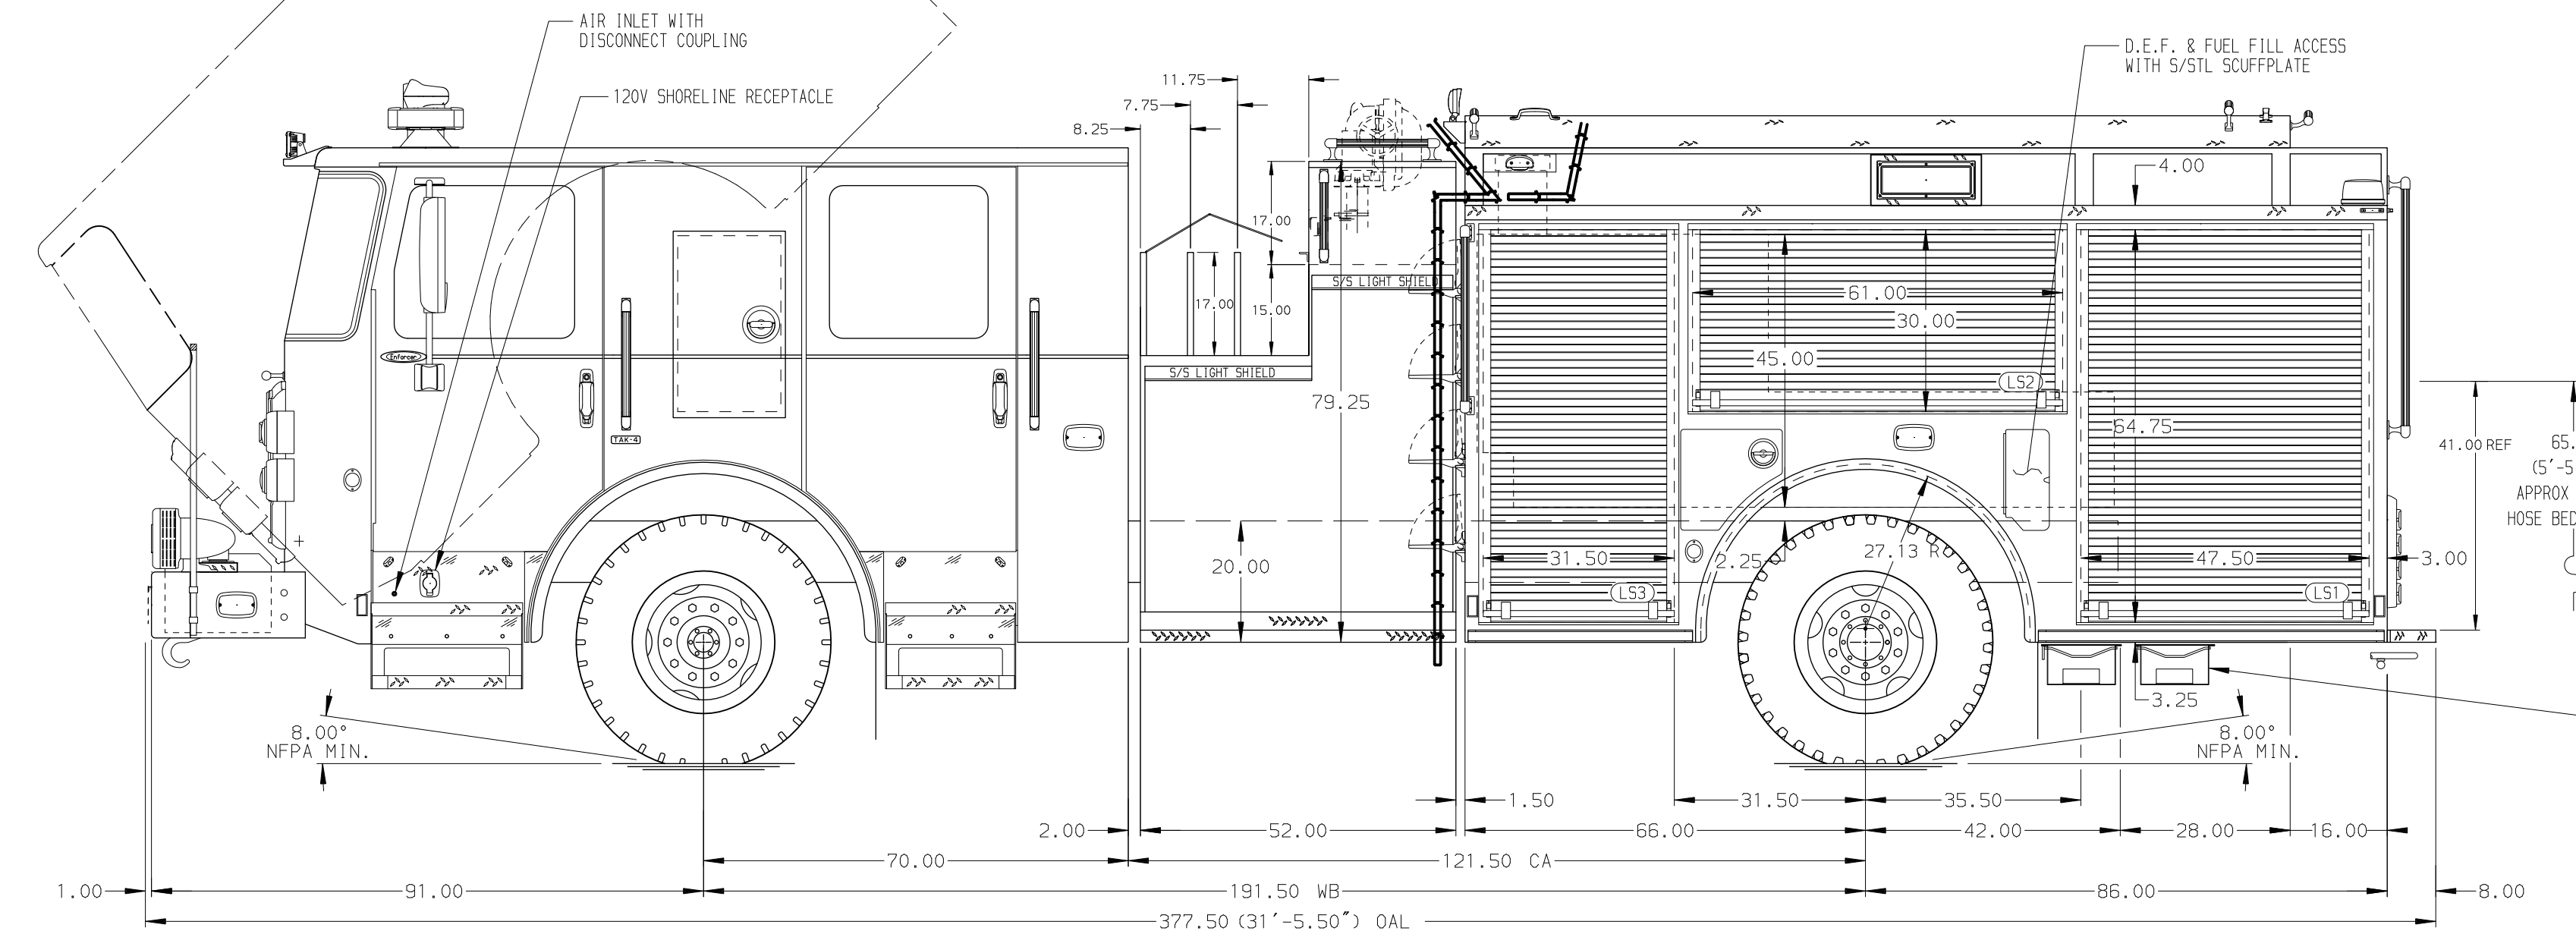

STAINLESS STEEL BODY

MAXIMUM O.A.H. 111.00"

FRONTAL IMPACT PROTECTION

NOTE
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR OUTLET WITH SHUT OFF VALVE LOCATED ON LS PUMP PANEL
- BATTERY CHARGER/COMPRESSOR LOCATED IN COMPARTMENT LS3
- BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
- S/STL SCUFFPLATE AROUND FUEL FILL OPENING
- D RIP PAN GUARDS FOR ALL BODY COMPARTMENT ROLL-UP DOORS
- PULL STRAPS FOR DOORS IN COMPARTMENTS LS2 & RS2
- ONE ADJUSTABLE SLIDE-OUT TRAY IN COMPARTMENT LS3
- ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT B1
- TWO ADJ FULL WIDTH/DEPTH SELVES IN COMPARTMENTS LS1, LS3, RS1, & RS3 : ONE IN B1
- ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR

REV	DATE	BY	CH	ENFORCER
30NOV18		MWA	PPE	PIERCE
30NOV18		GVH	PPE	PIERCE
20SEP18		GVH	NPA	MODEL

TITLE	1250-D-500G WATER, 152" FH/FDLER BODY, SIDE CTRL (3) CROSSSLAYS, DELUGE, LADDERS BESIDE TANK
FOR	CAMBRIDGE FIRE DEPARTMENT CAMBRIDGE, MASSACHUSETTS
DWG NO.	32988AD

JOB NO.	32988
SCALE	1:24
DATE	
DRAWN BY	GVH
CHECKED BY	NPA
SHEET SIZE	D
SHEET NO.	1 OF 1