

PUMPER

BODY

Long Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

20,000 Lb Meritor Axle

AXLE, REAR

27,000 Lb Meritor Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

Non-Extended Painted Steel

CAB

6010 Enforcer Cab

BODY

WATER TANK

1000 Gallon Poly Water Tank

COMPT, PUMPER, REAR

51.25" FF RollUp Rear Compt

COMPT, PUMPER, DRIVER SIDE

161" Lap Full Height Front & Rear FDLER

COMPT, PUMPER PASS. SIDE

161" Lap Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

42" Control Zone Top Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

(2) 1.50" Standard Capacity

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

1.50" Speedlay Not Required

GENERATOR

Generator Not Required

Foam System

Foam System Not Required


Foam Cell

Foam Cell Not Required

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
2. AIR OUTLET WITH SHUT OFF VALVE LOCATED ON PASSENGER SIDE PUMP PANEL
3. SHORELINE RECEPTACLE WITH KOSSMULL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
4. BATTERY CHARGER LOCATED BEHIND DRIVERS SEAT
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. EIGHT ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. THREE FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
9. TWO ALUMINUM TOOLBOARDS LOCATED PER SHOP ORDER
10. FEDERAL RUMBLER-3 SPEAKER LOCATED PER SHOP ORDER

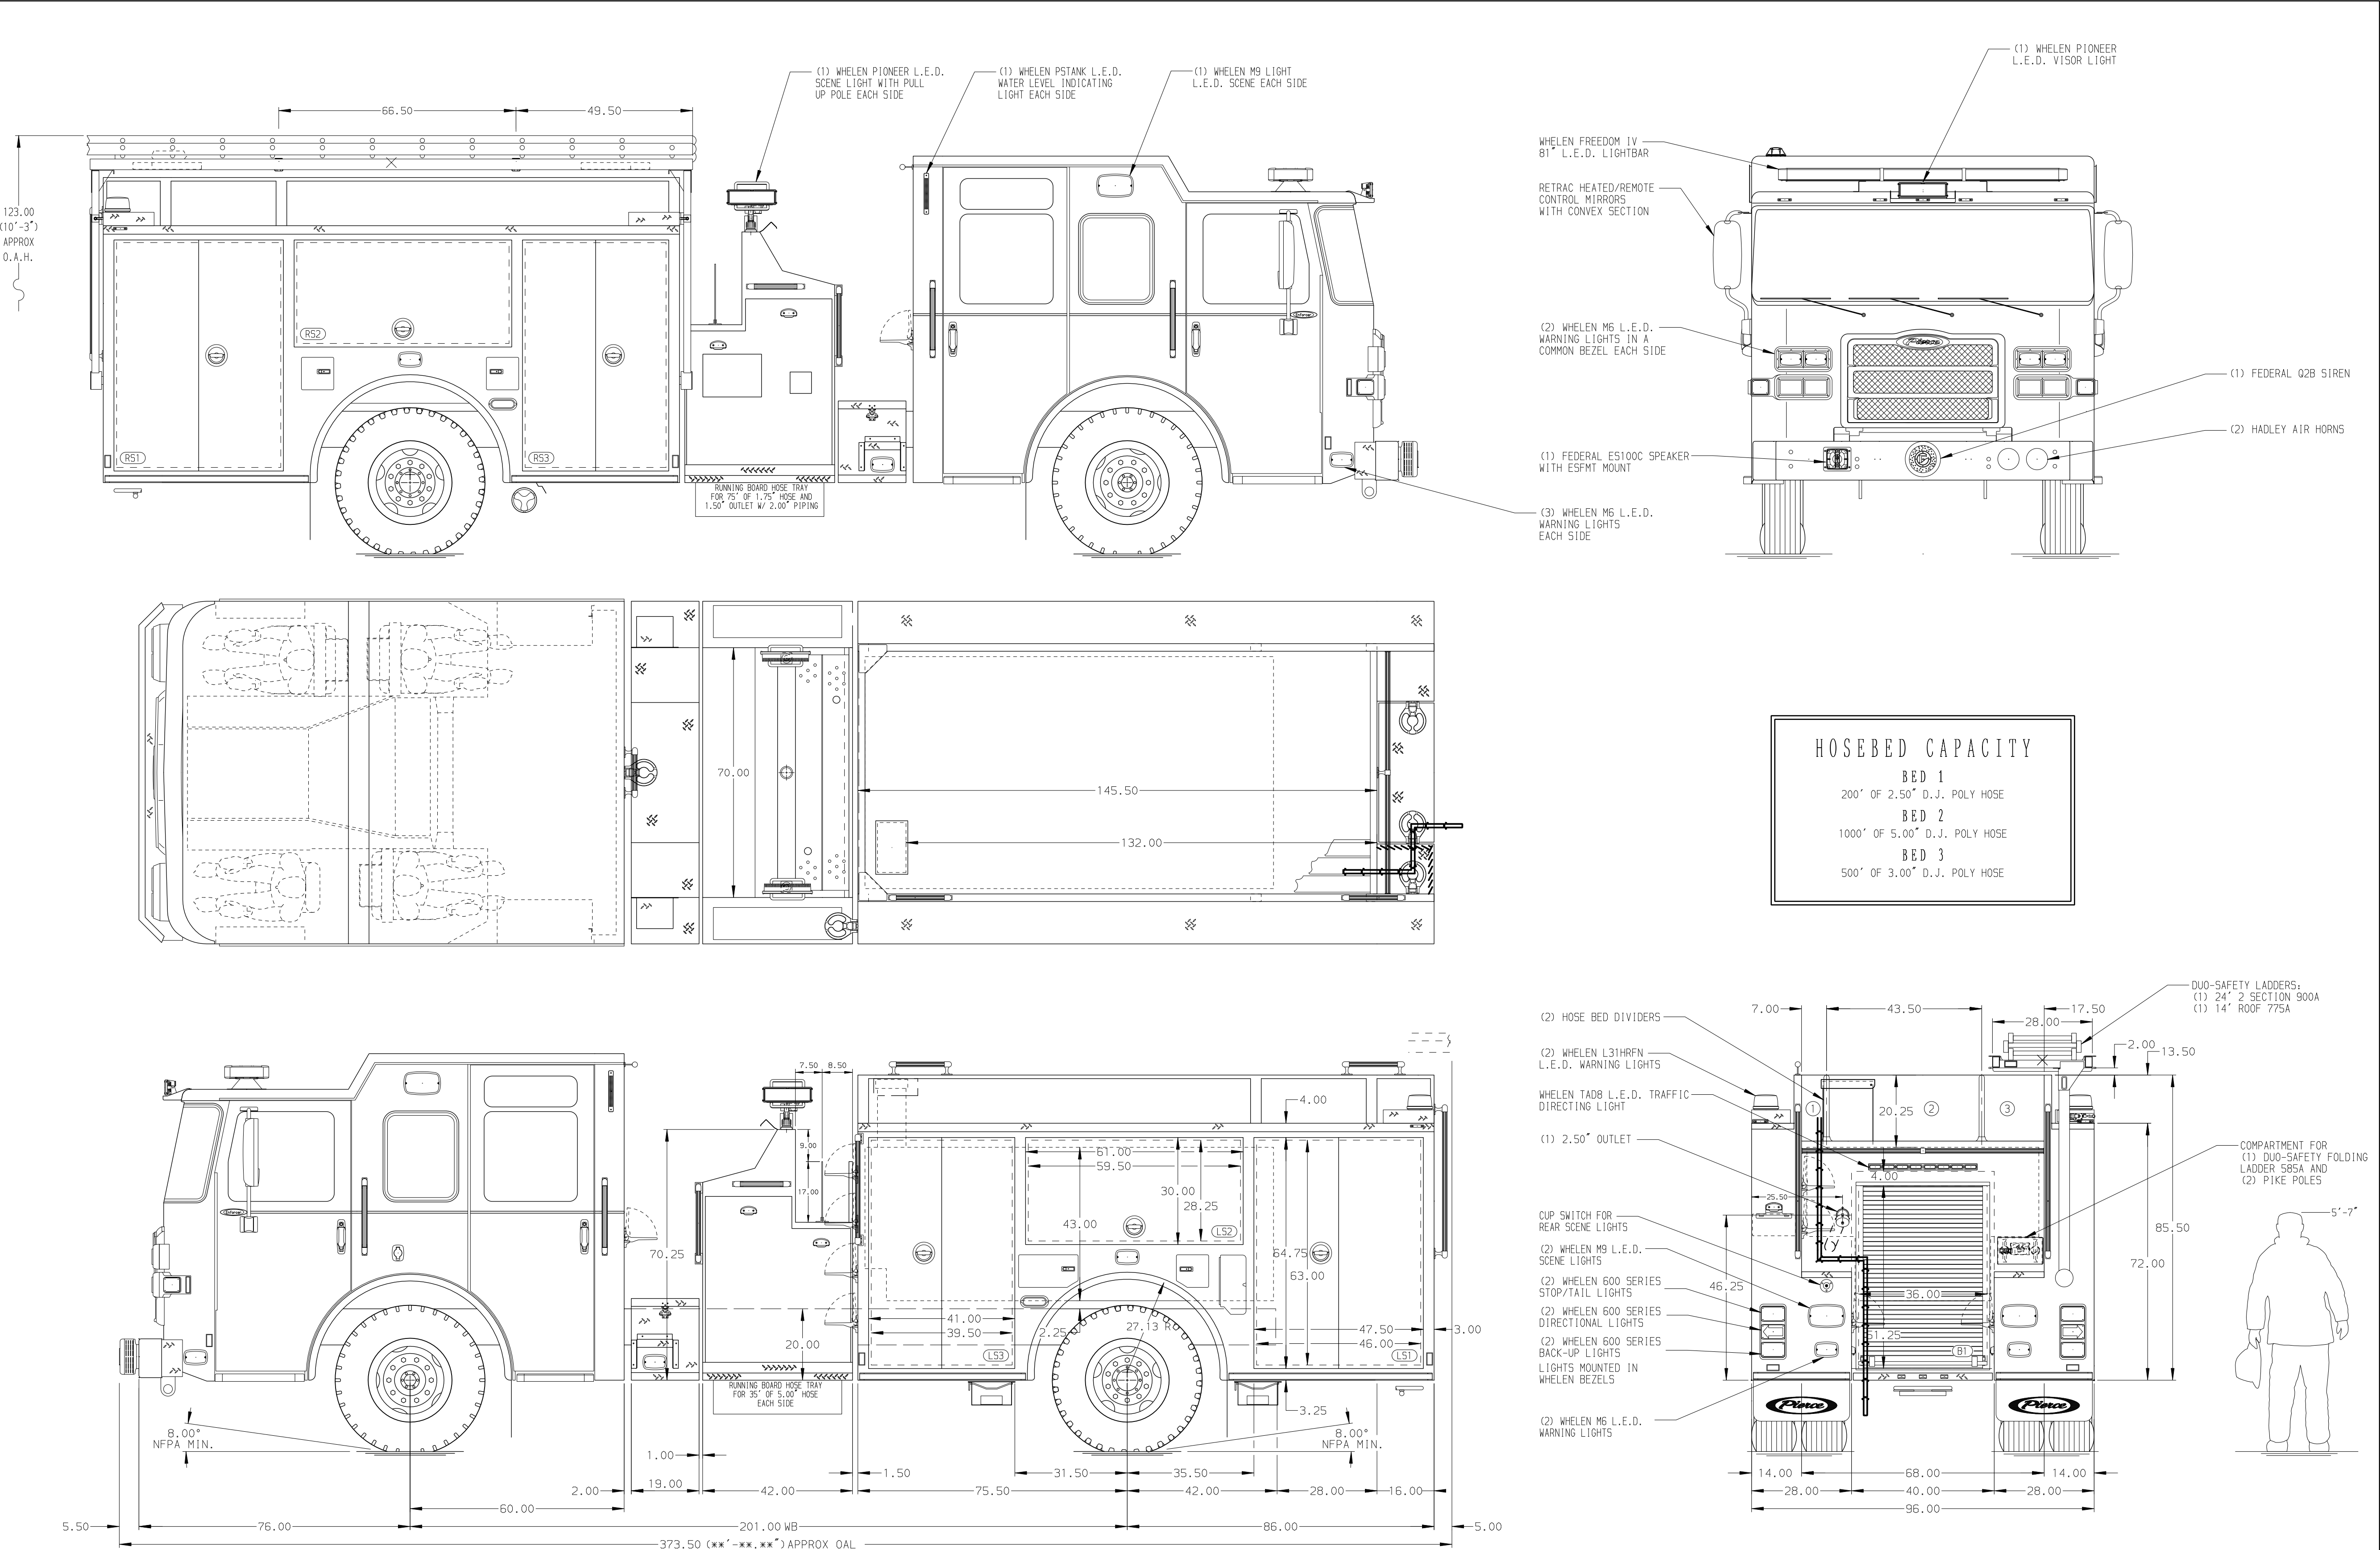

				Pierce MANUFACTURING INC.		JOB NO.	33210 01-02
						SCALE	DATE
						DRAWN BY	090CT18
						CHECKED BY	090CT18
						SHEET SIZE	SHEET NO.
						D	1 OF 1

				CHASSIS DATA	TITLE	Pierce Pumper Approval Drawing	
				MAKE	FOR	Cedar Hammock Fire Control District	
				MODEL	DWG NO.	33210AD	
				ENFORCER			