

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

AXLE, REAR
27,000 lb Dana Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS P

19" Extended Painted Steel

7010 Enforcer Cab

1000 Gallon Poly Water Tank

51.25" FF Rollup 25.88" Deep Flush Rear Compt

152" Rollup Full Height Front & Rear FDLER

152" Rollup Full Height & Depth Front & Rear

42" Control Zone Top Mount

1500 GPM HaLe QMAX

1.50" Crosslays Not Required

2.50" Crosslay Not Required

(2) 1.50" W/Tray Std. Capacity

Generator Not Required

Husky 3 Single Agent Foam System





30 Gallon Foam Cell, Not Reduced Water


Side Roll and Frontal Impact Protection

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.5 OUTFLOW WITH 2.00 PIPING AND SWIVEL LOCATED IN RIGHT SIDE BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSEMAN SUPER AUTO-EJECT LOCATED ON DRIVER SIDE CREW CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED BEHIND DRIVER SEAT
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. FOUR ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
8. TWO ADJUSTABLE SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
9. TWO TILTING/SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
10. TWO SWING-OUT TOOLBOARDS LOCATED PER SHOP ORDER

11. CTECH FOUR DRAWER CABINET LOCATED PER SHOP ORDER
12. ALUMINUM PEGBOARD LOCATED PER SHOP ORDER
13. ROLLED HOSE STORAGE RACK LOCATED PER SHOP ORDER
14. ONE 120V 6-PLACE RECEPTACLE LOCATED PER SHOP ORDER

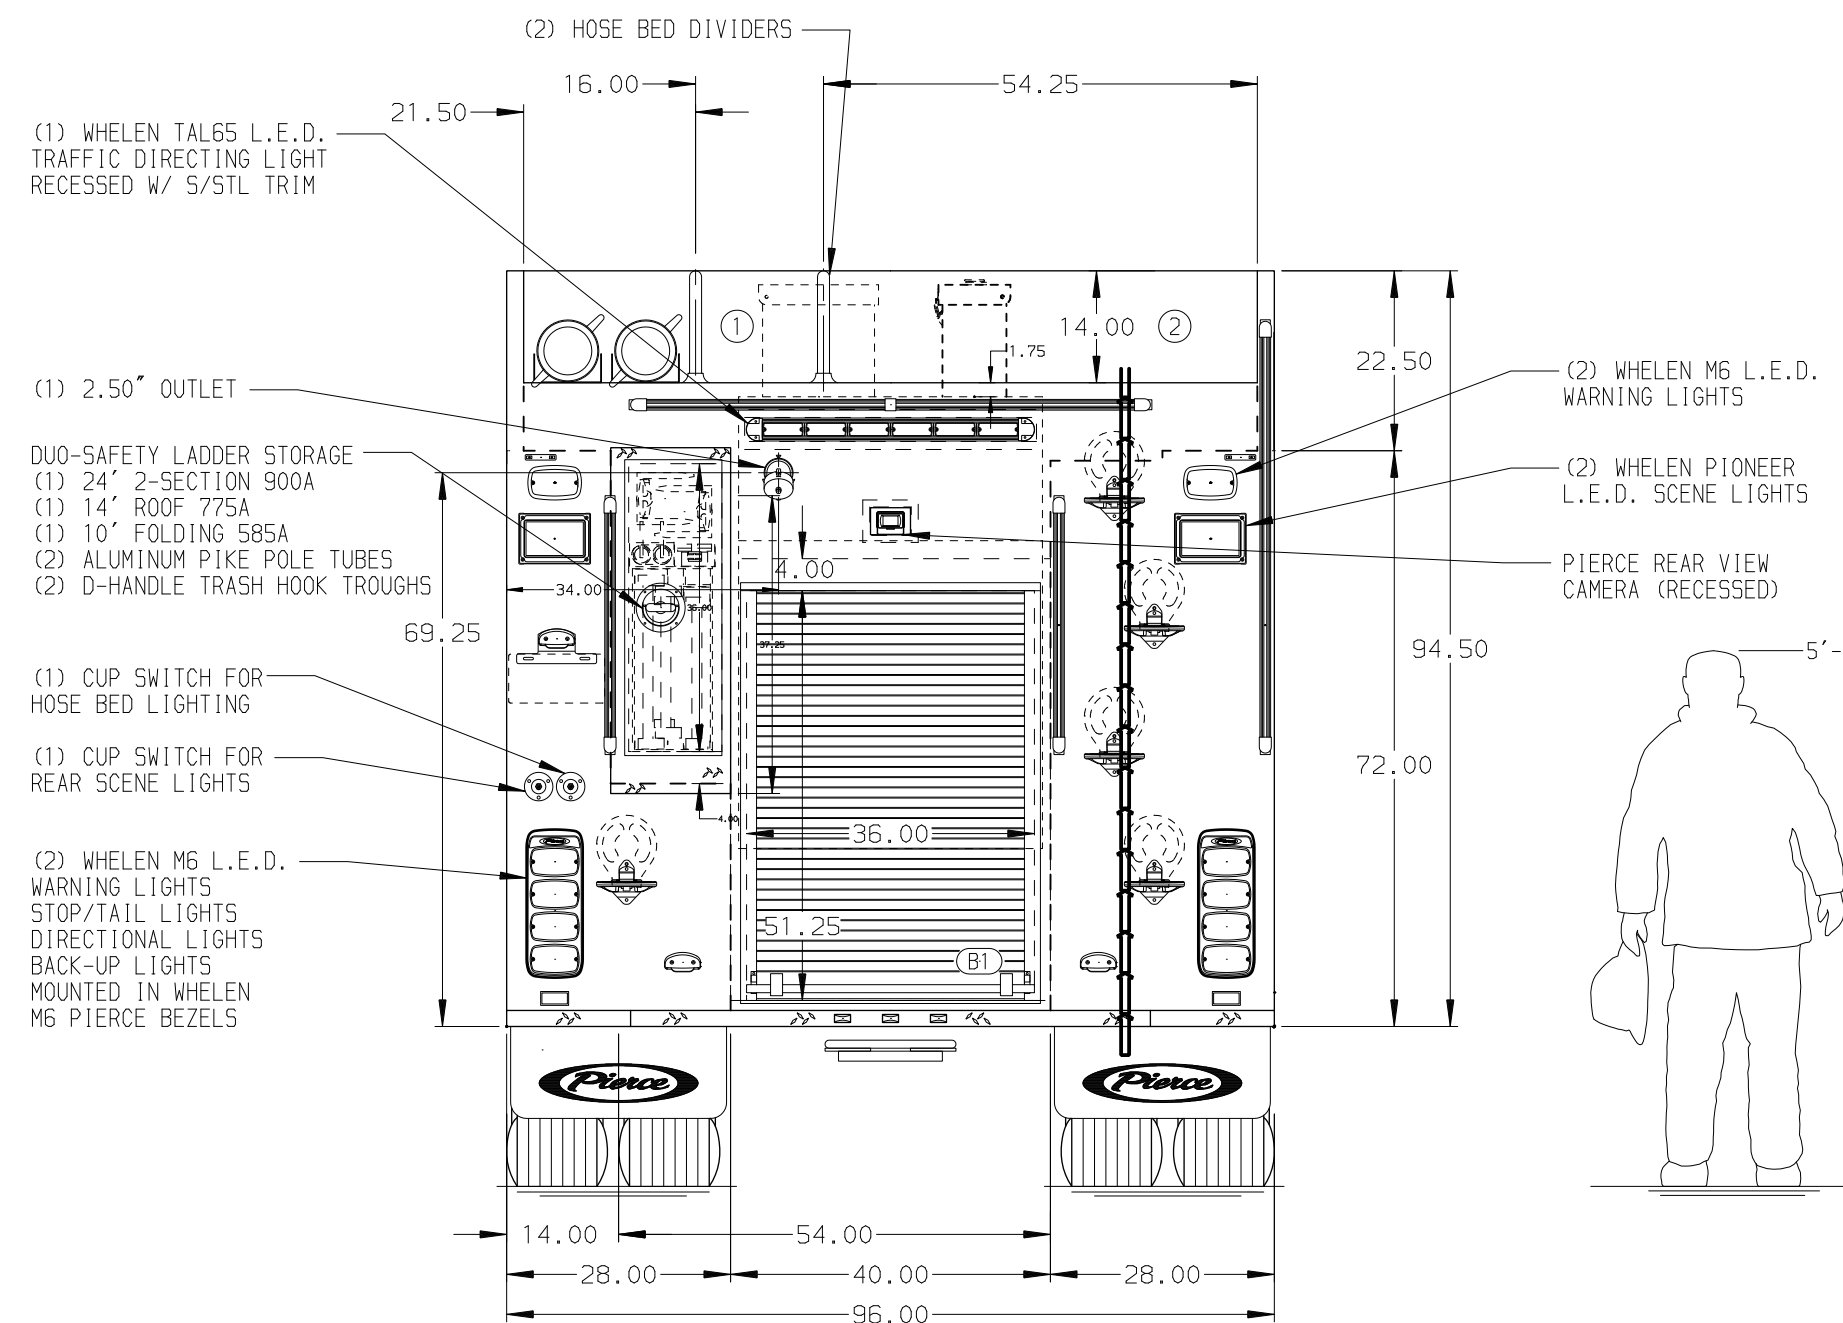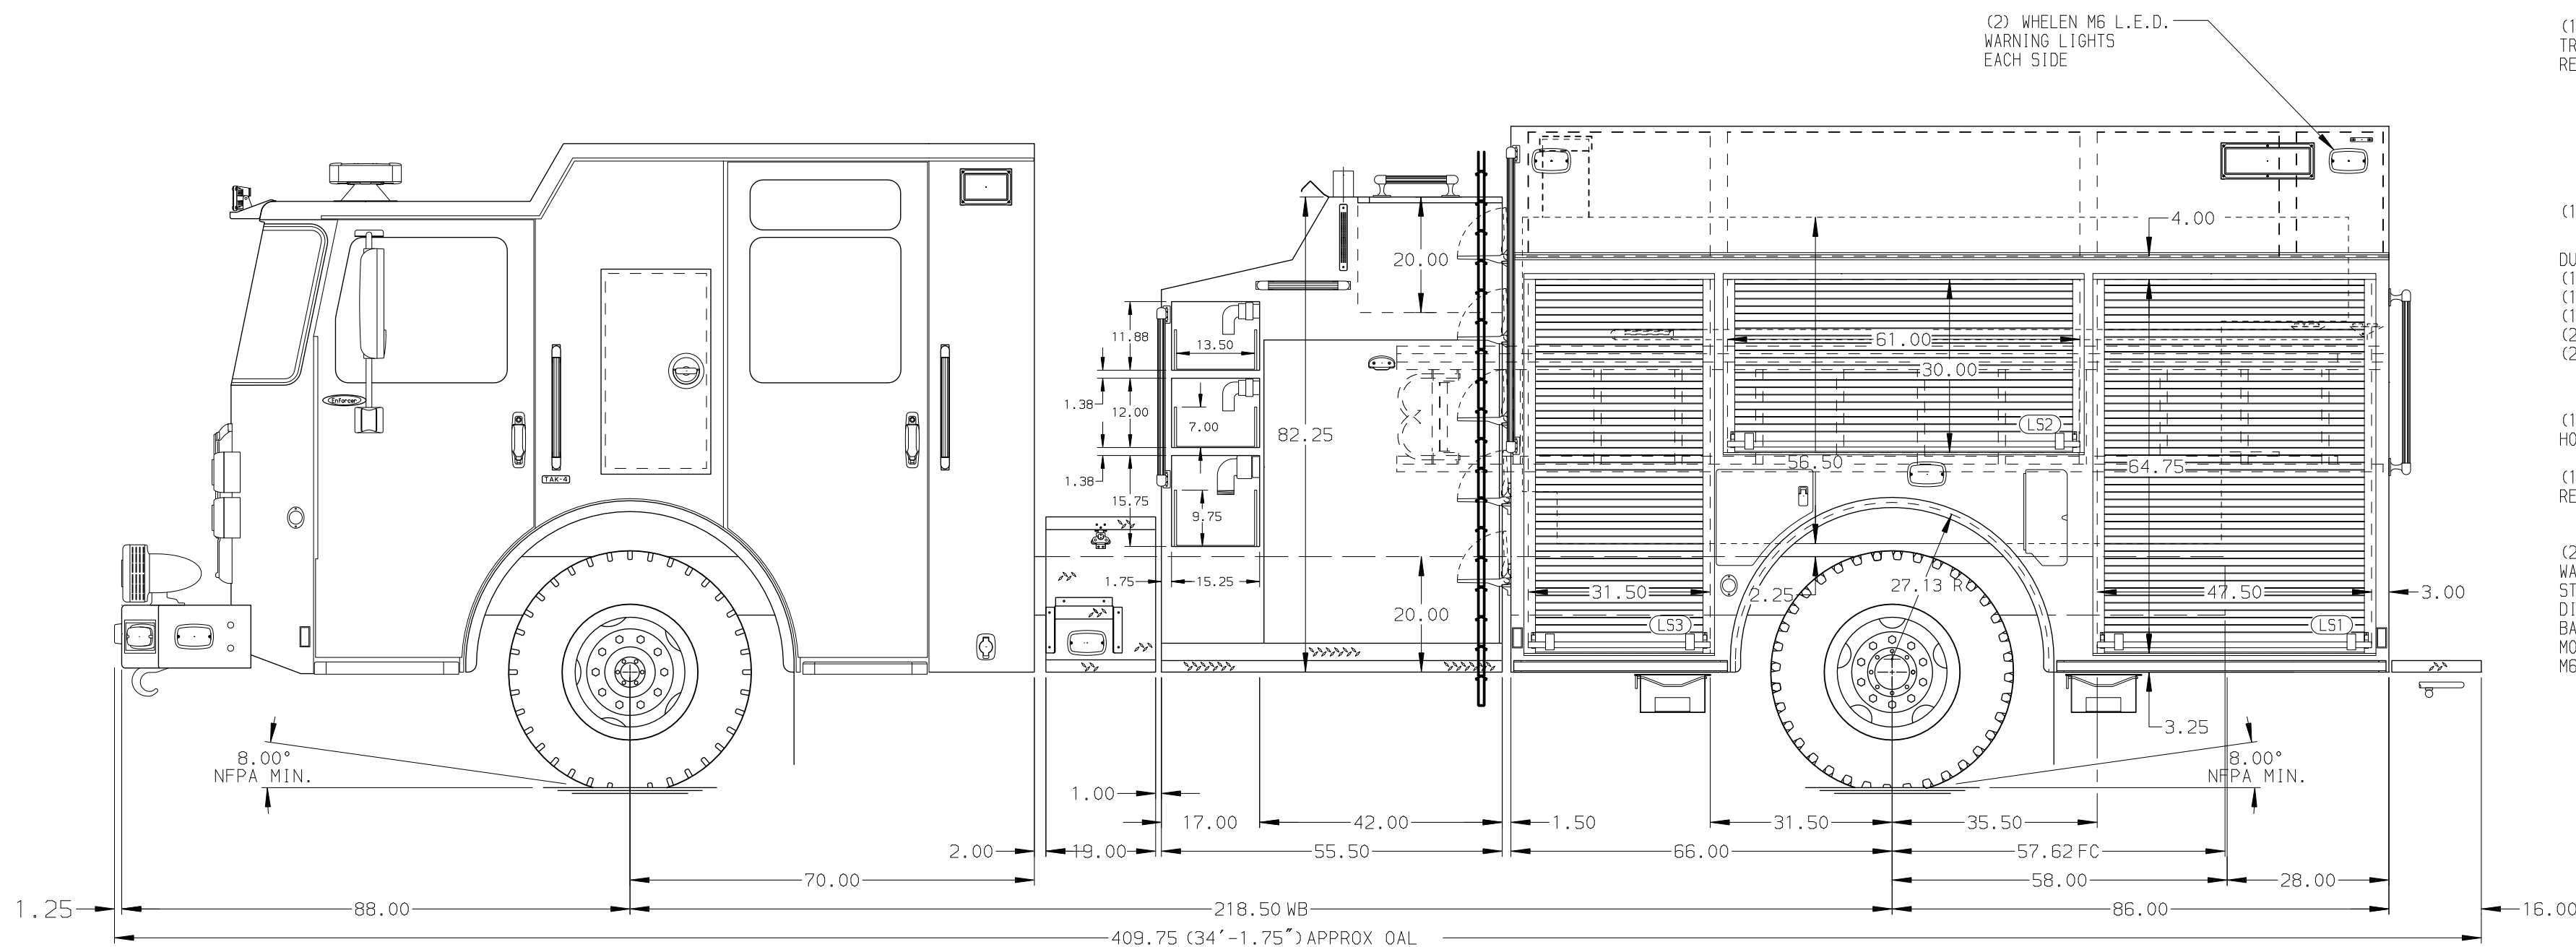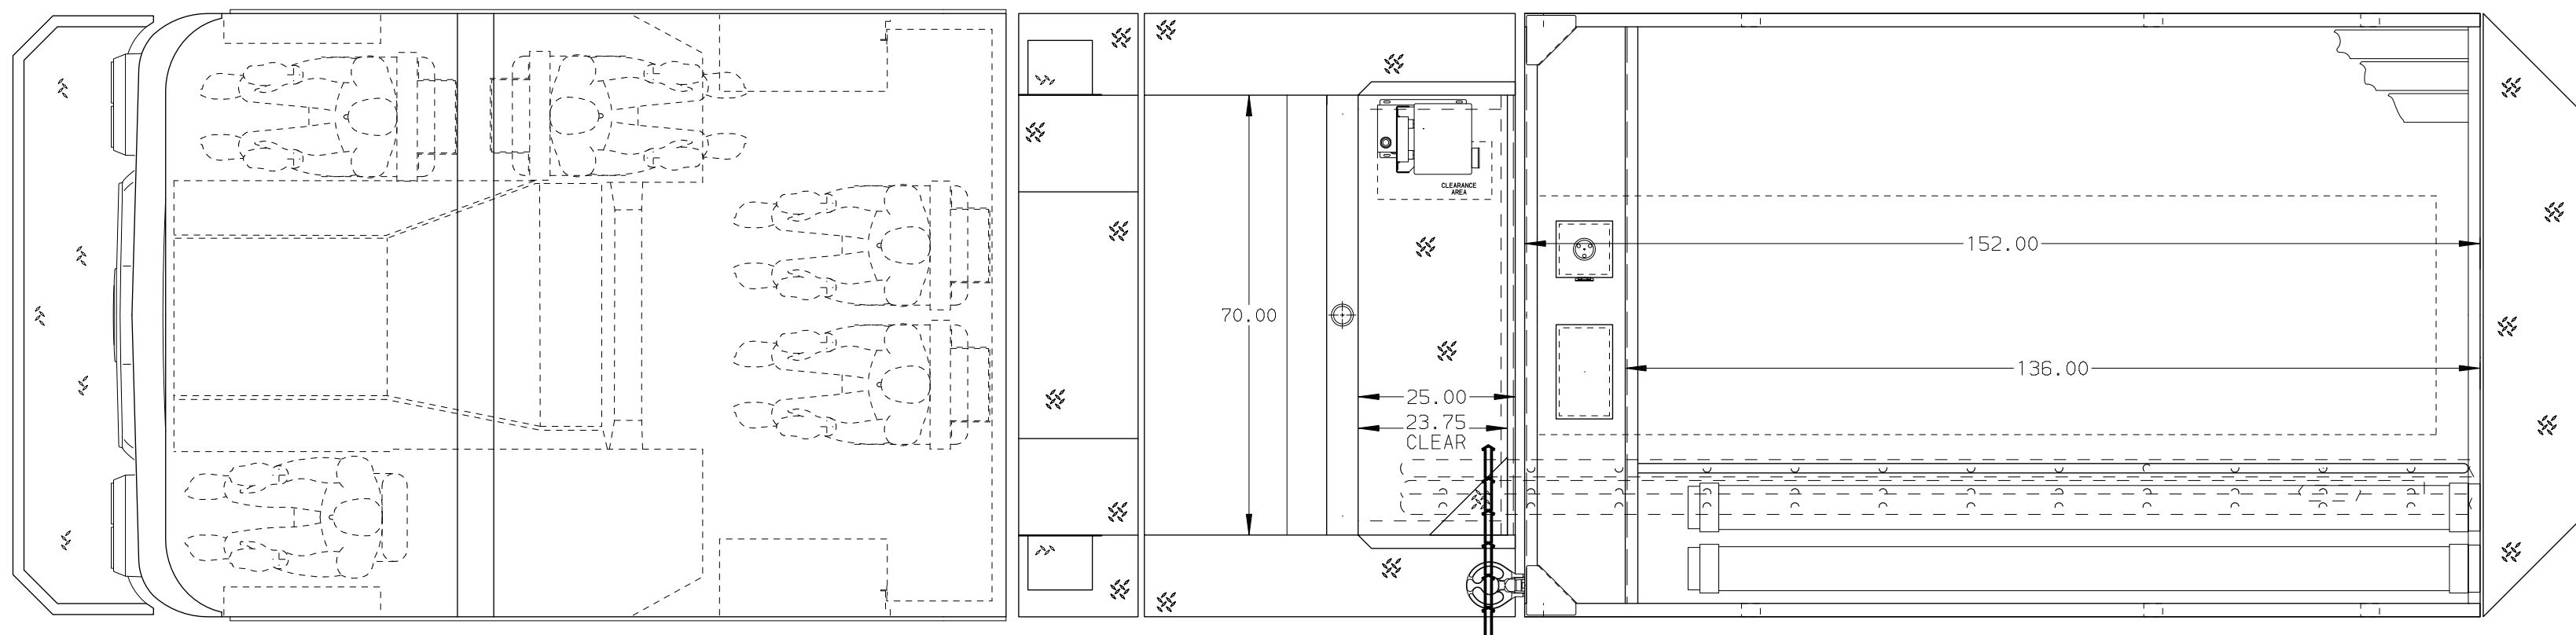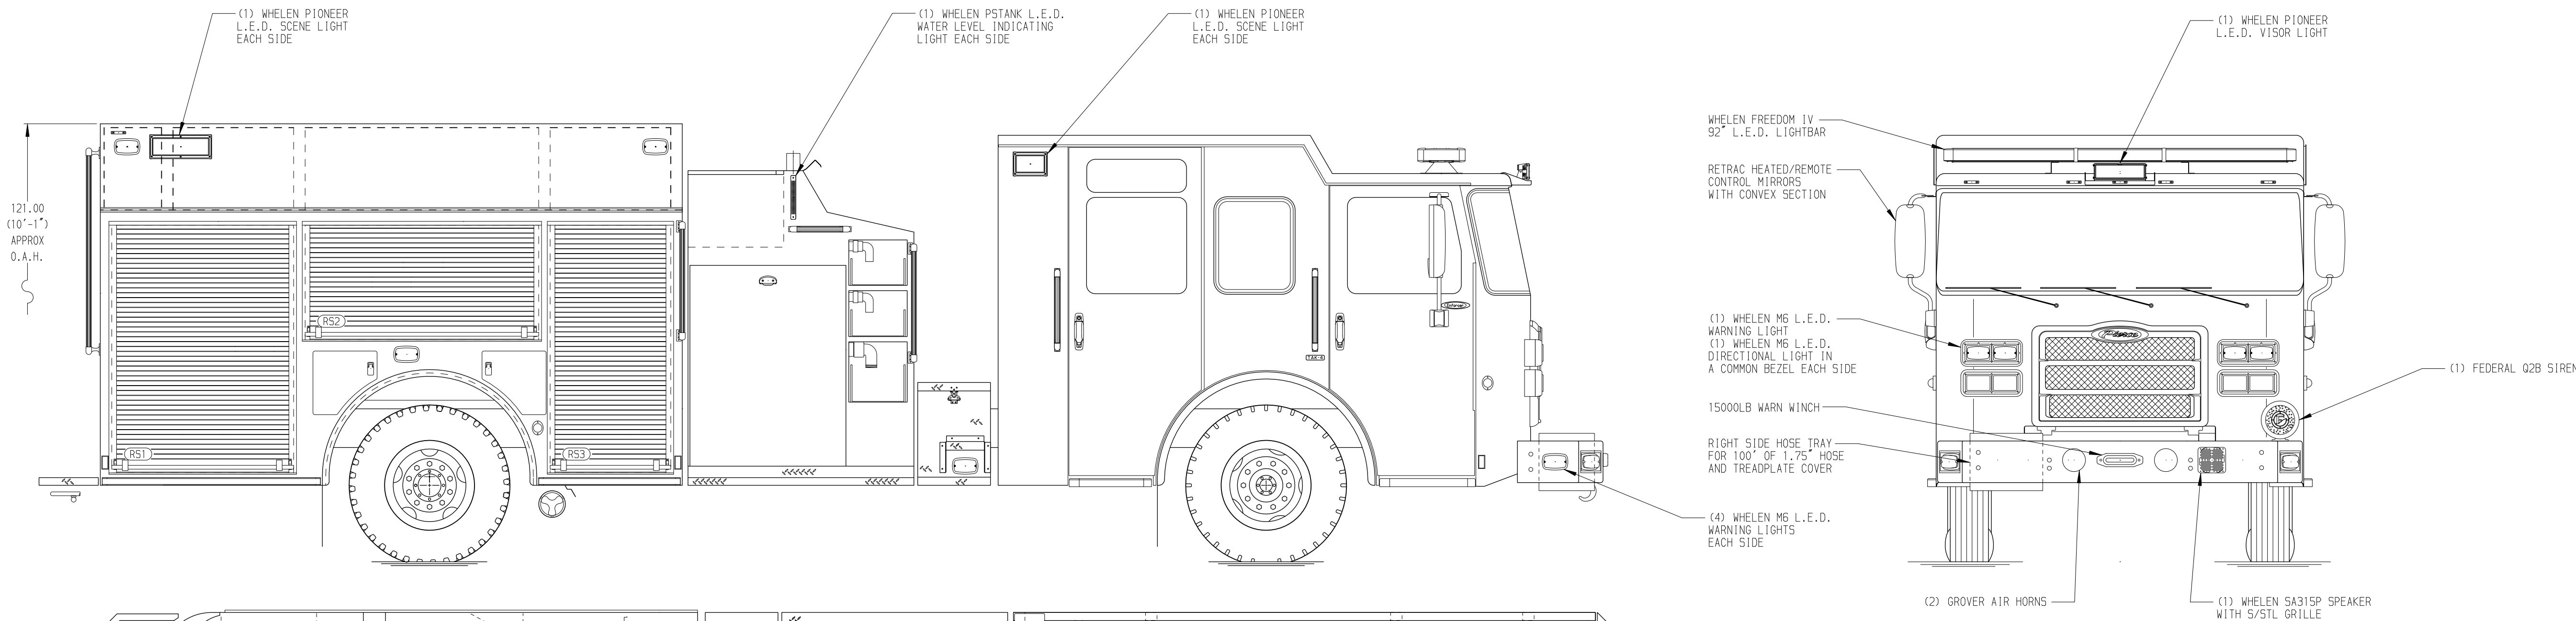

 MANUFACTURING INC.		JOB NO.	33377
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY COL	16JAN19
FOR	Emory Fire Department	CHECKED BY KBO	18JAN19
DWG NO.	33377AD	SHEET SIZE D	SHEET NO. 1 OF 1