
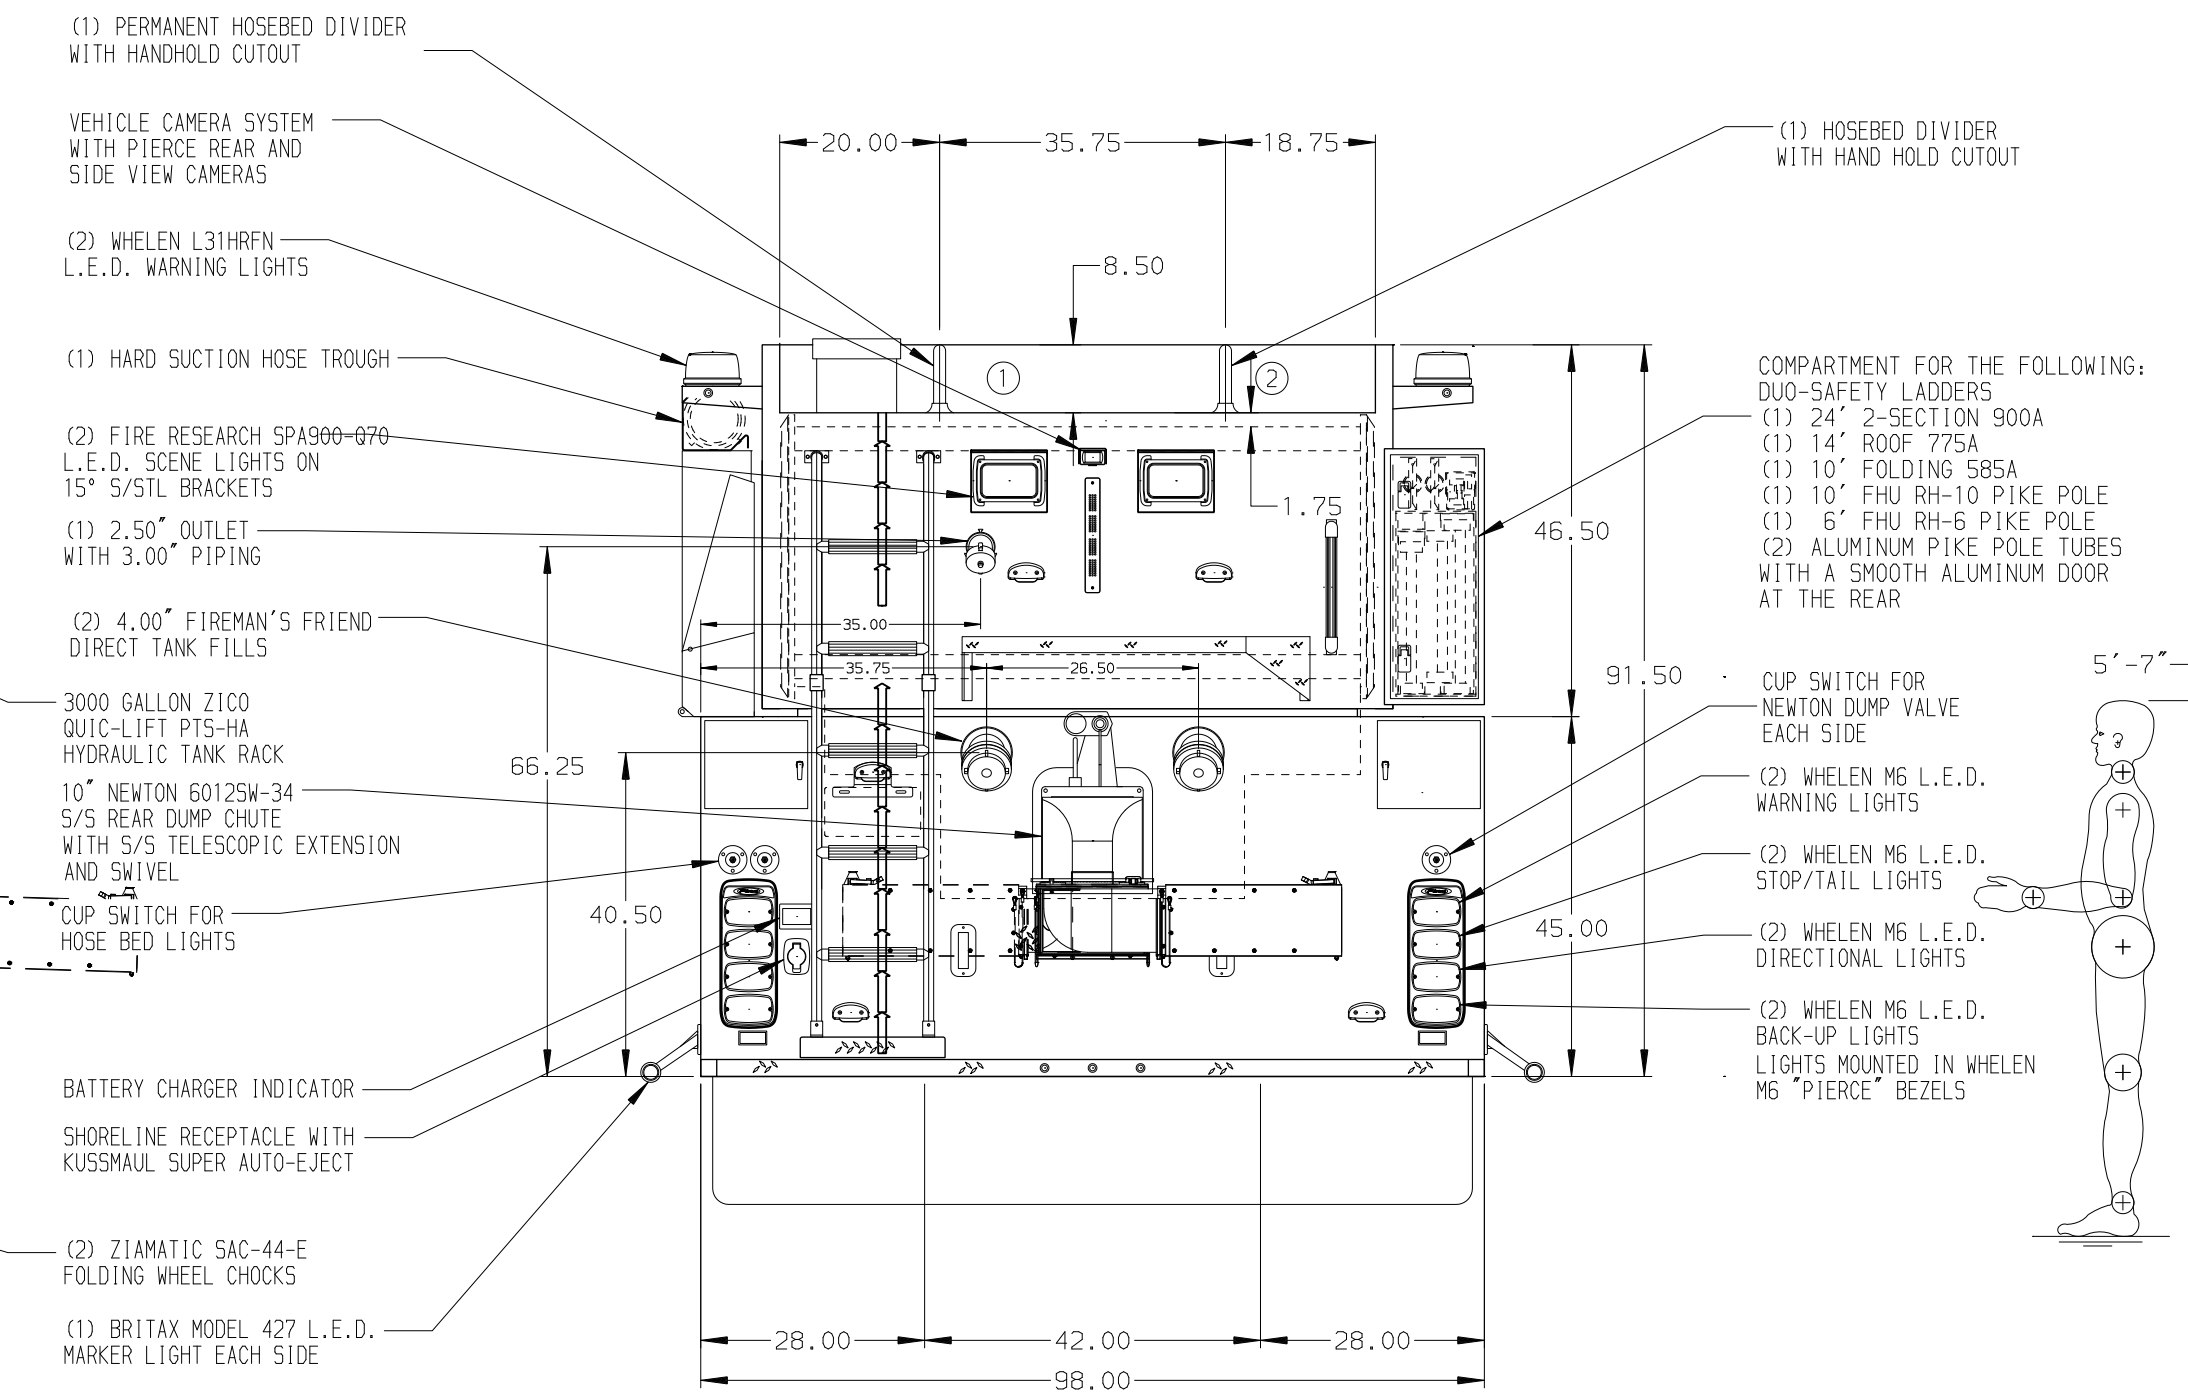


HOSEBED CAPACITIES  
 ① 500' OF 5.00\"/>

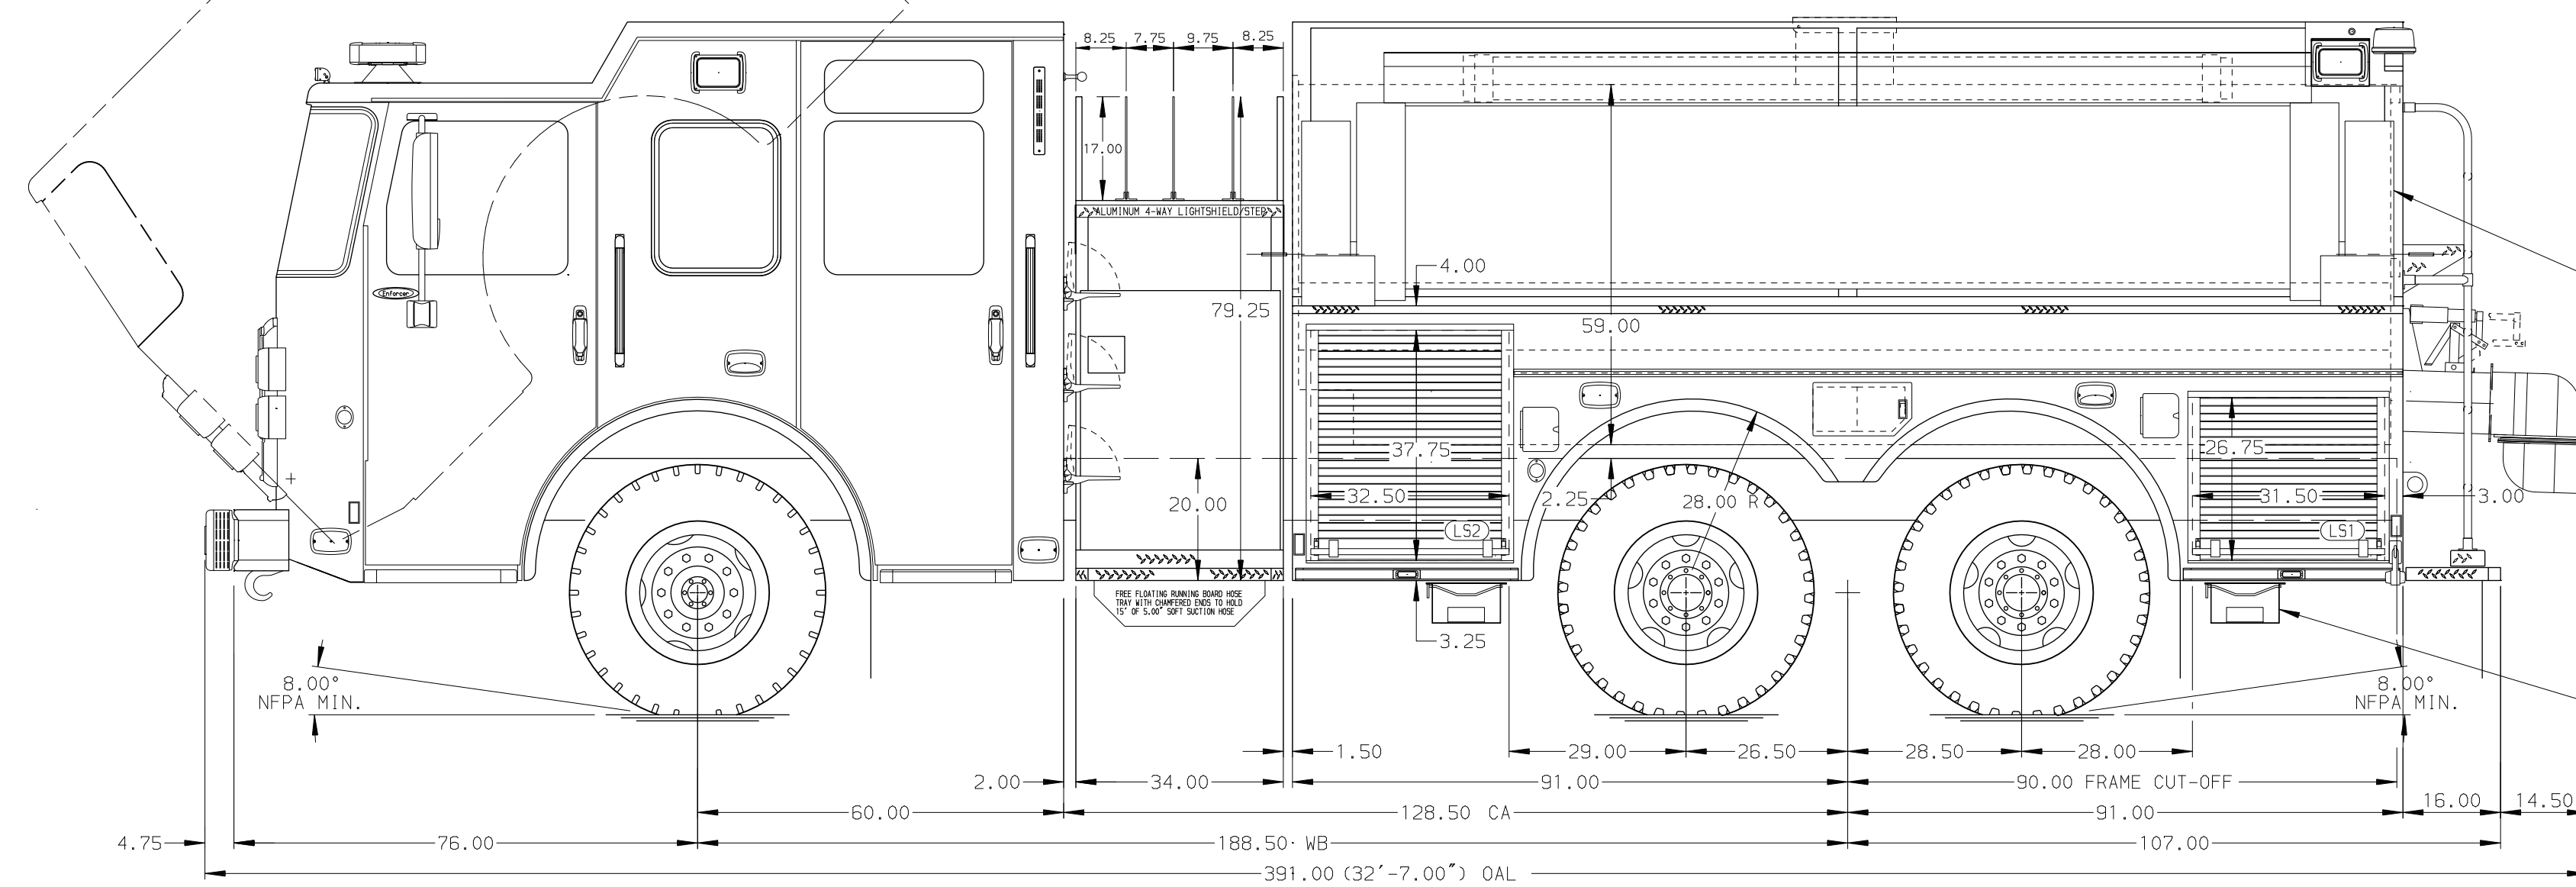

ALUMINUM BODY

TARGET O.A.L. 391.00"

MAXIMUM O.A.H. 118.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

**Pierce MANUFACTURING INC.**

**NOTE**  
 DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- AIR INLET WITH DISCONNECT COUPLING LOCATED ON DRIVER'S SIDE PUMP PANEL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED IN COMPARTMENTS LS1, LS2, RS1, RS4
- ONE ADJUSTABLE SHELF (FULL DEPTH/FULL WIDTH) IN COMPARTMENTS LS2, RS2

REV	DATE	BY	CH	ENFORCER	CHASSIS DATA	TITLE
					PIERCE	1250-D-2500P, 182", LOW D.S., BROOM P.S., DRY SIDE (3) X-LAYS, (1) DEADLAY, FOL-DA-TANK
					MODEL	LOVELADY FIRE & RESCUE RUTHERFORD COLLEGE, NORTH CAROLINA
						DWG NO. 33526AD

JOB NO.	33526
SCALE	1:24
DATE	
DRAWN BY	JWO
05FEB19	
CHECKED BY	CDU
12FEB19	
SHEET SIZE	D
SHEET NO.	1 OF 1