

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

AXLE, REAR
31,000 lb Dana Axle

450 HP Cummins L9 Engine

ALLison 5th Gen, 3000 EVS P

19" Extended Stainless Steel

7010 Enforcer Cab

OMPT, PUMPER, REAR
51.25" FF Rollup Rear Compt

152" Rollup Full Height Front & Rear FDLER

152" Rollup Full Height Front & Rear FDLER

52" Control Zone Top Mount

1500 GPM HaLe QMAX

(2) 1.50" Standard Capacity

(1) 2.50" Standard Capacity

SpeedLays Not Required

Generator Not Required




Husky 3 Single Agent Foam System

20 Gallon Foam Cell, Not Reduced Water

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE
AND ARE SUBJECT TO MINOR DEVIATIONS
AS MAY OCCUR OR BE NECESSARY IN
CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SHIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORINE RECEPTACLE WITH KUSUMA SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET OUTLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPMILL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER
6. SIX ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
8. ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER

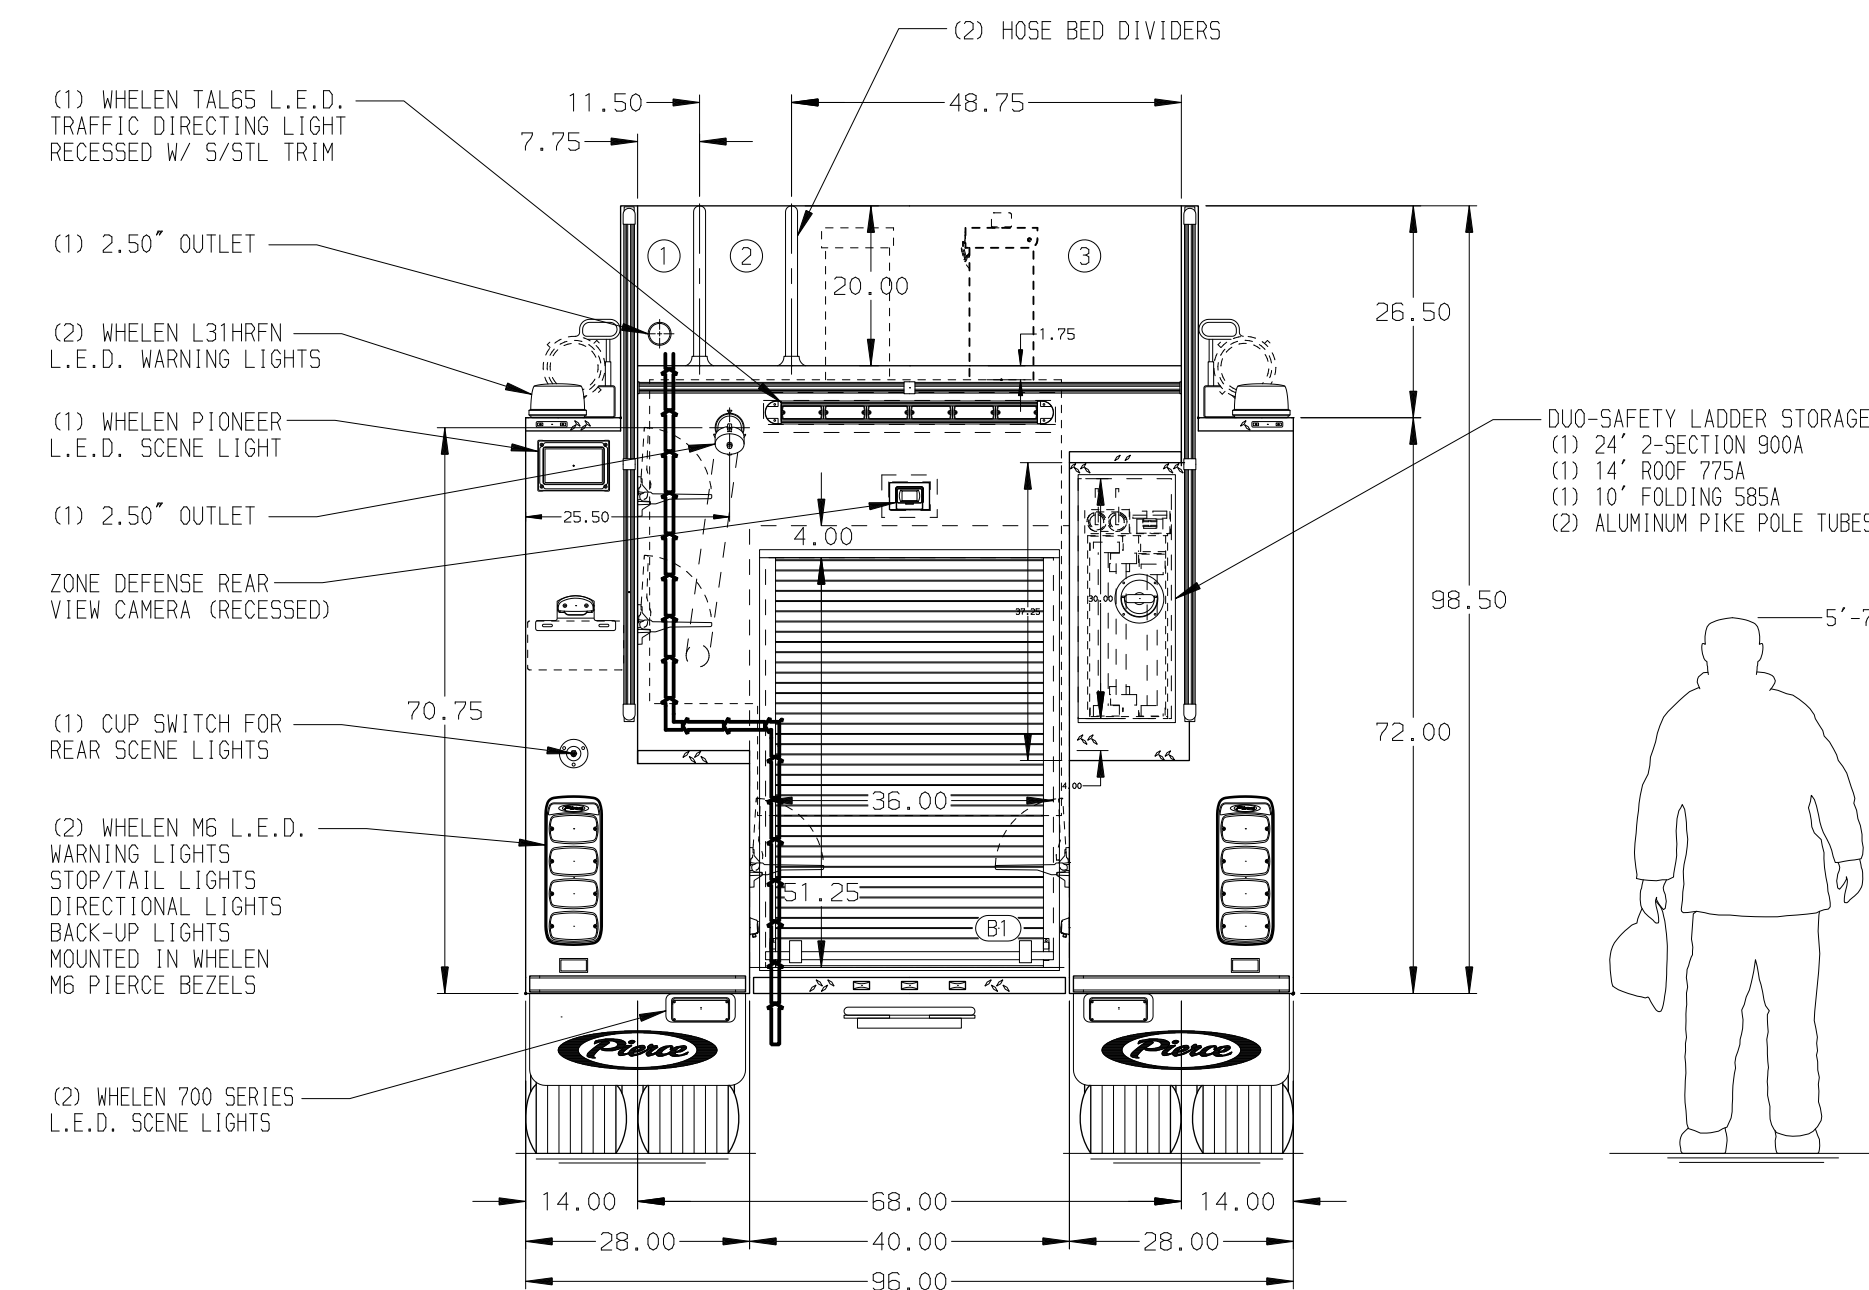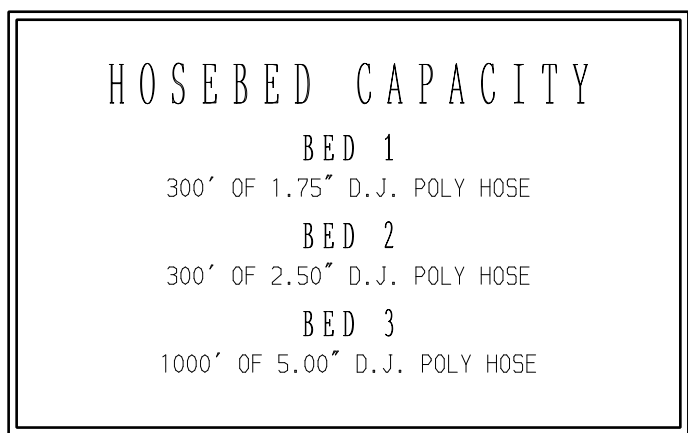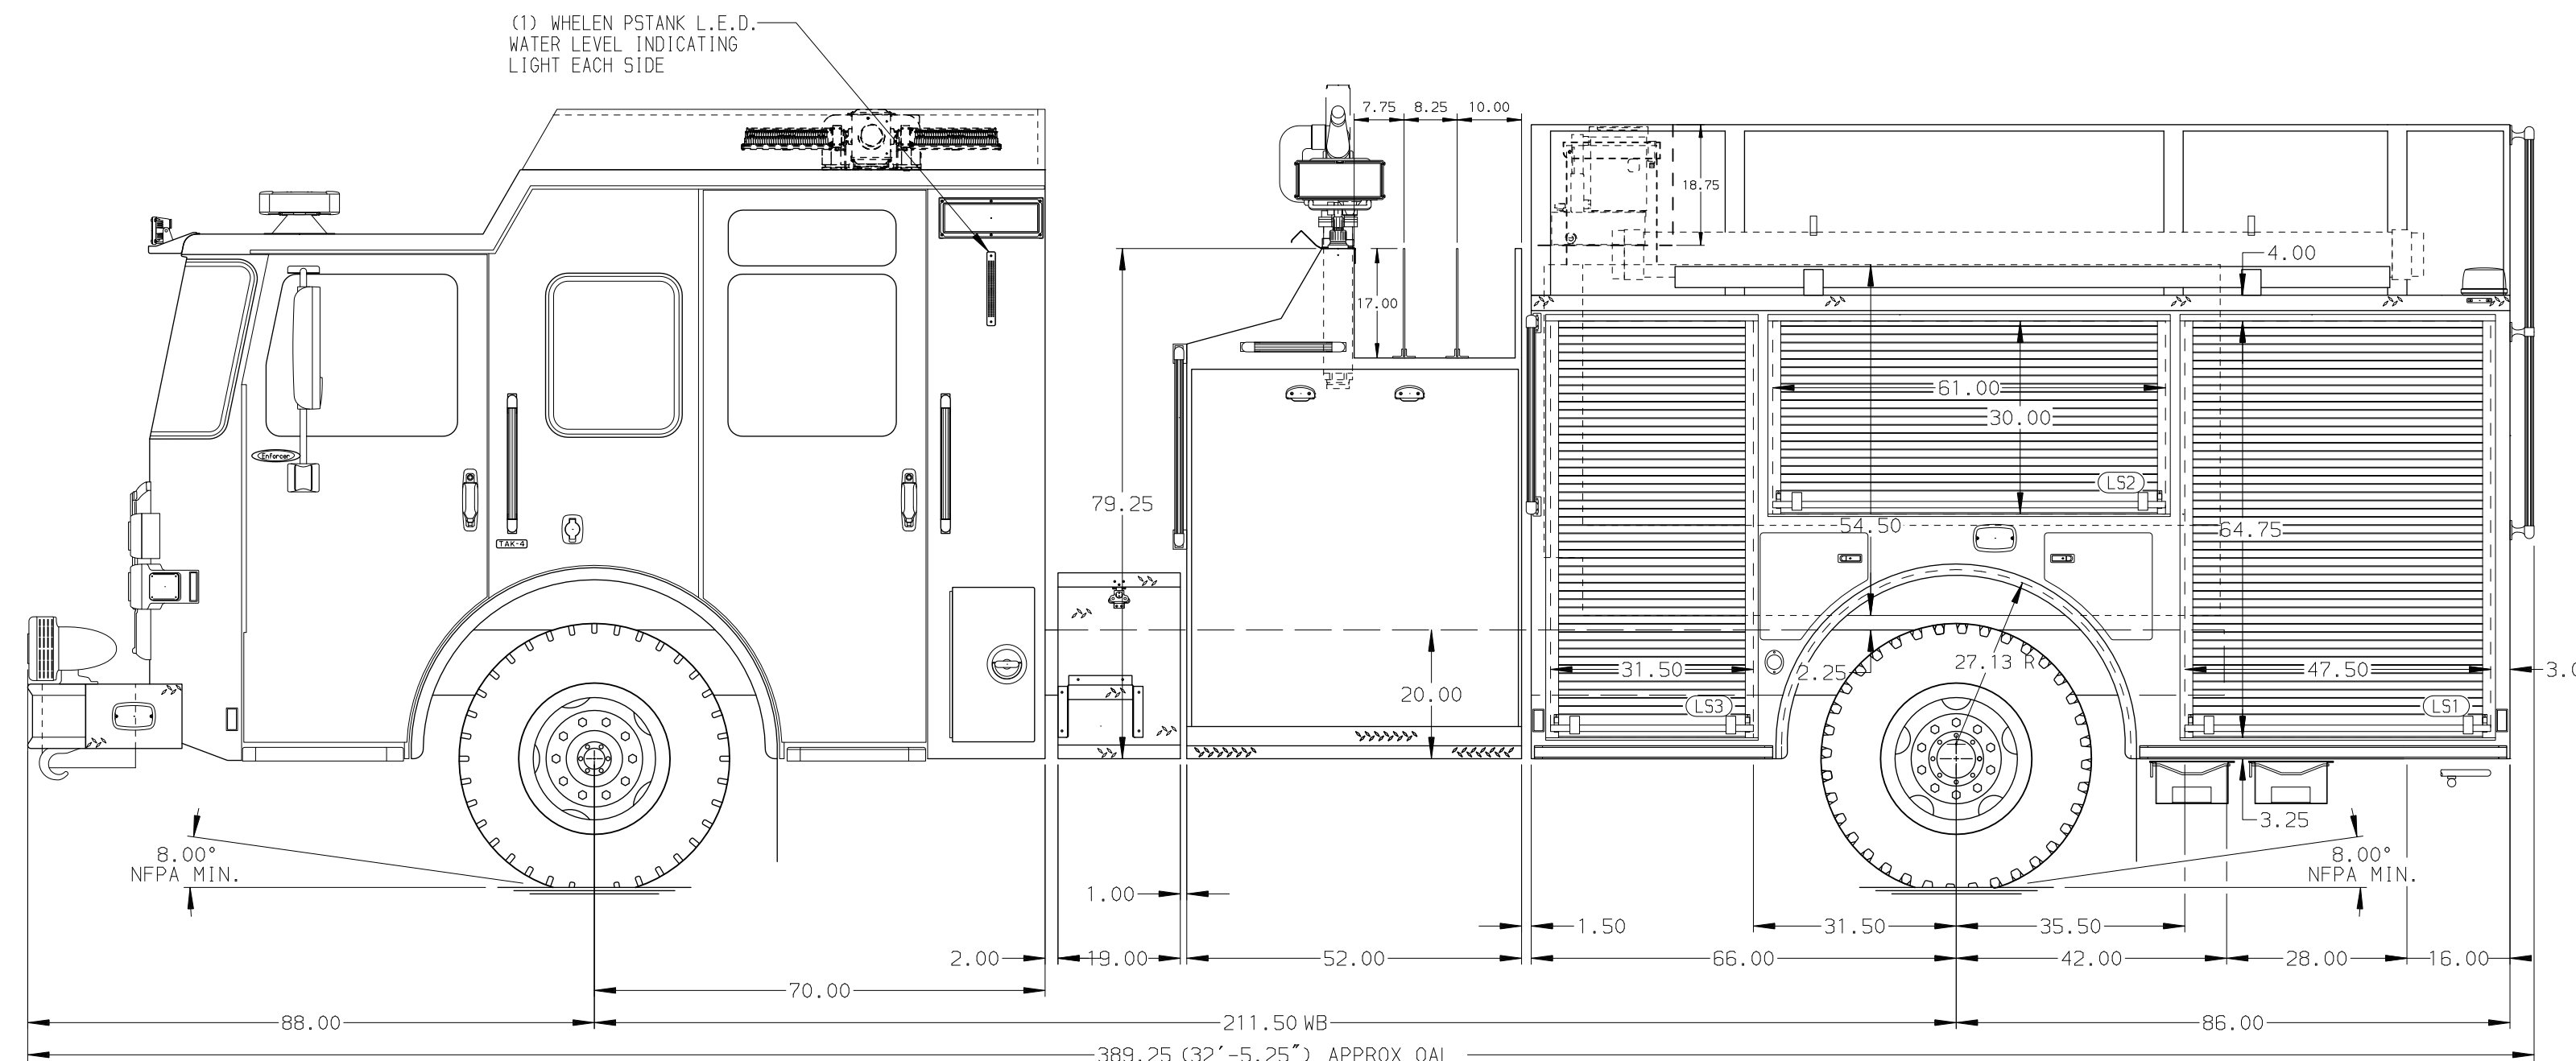

 MANUFACTURING INC.		JOB NO.	33551
		SCALE 1:24	DATE
TITLE	Pierce Pumper Approval Drawing	DRAWN BY COL	12FEB19
FOR	Shelton Island Fire District	CHECKED BY KBO	12FEB19
DWG NO.	33551 AD	SHEET SIZE D	SHEET NO. 1 OF 1