
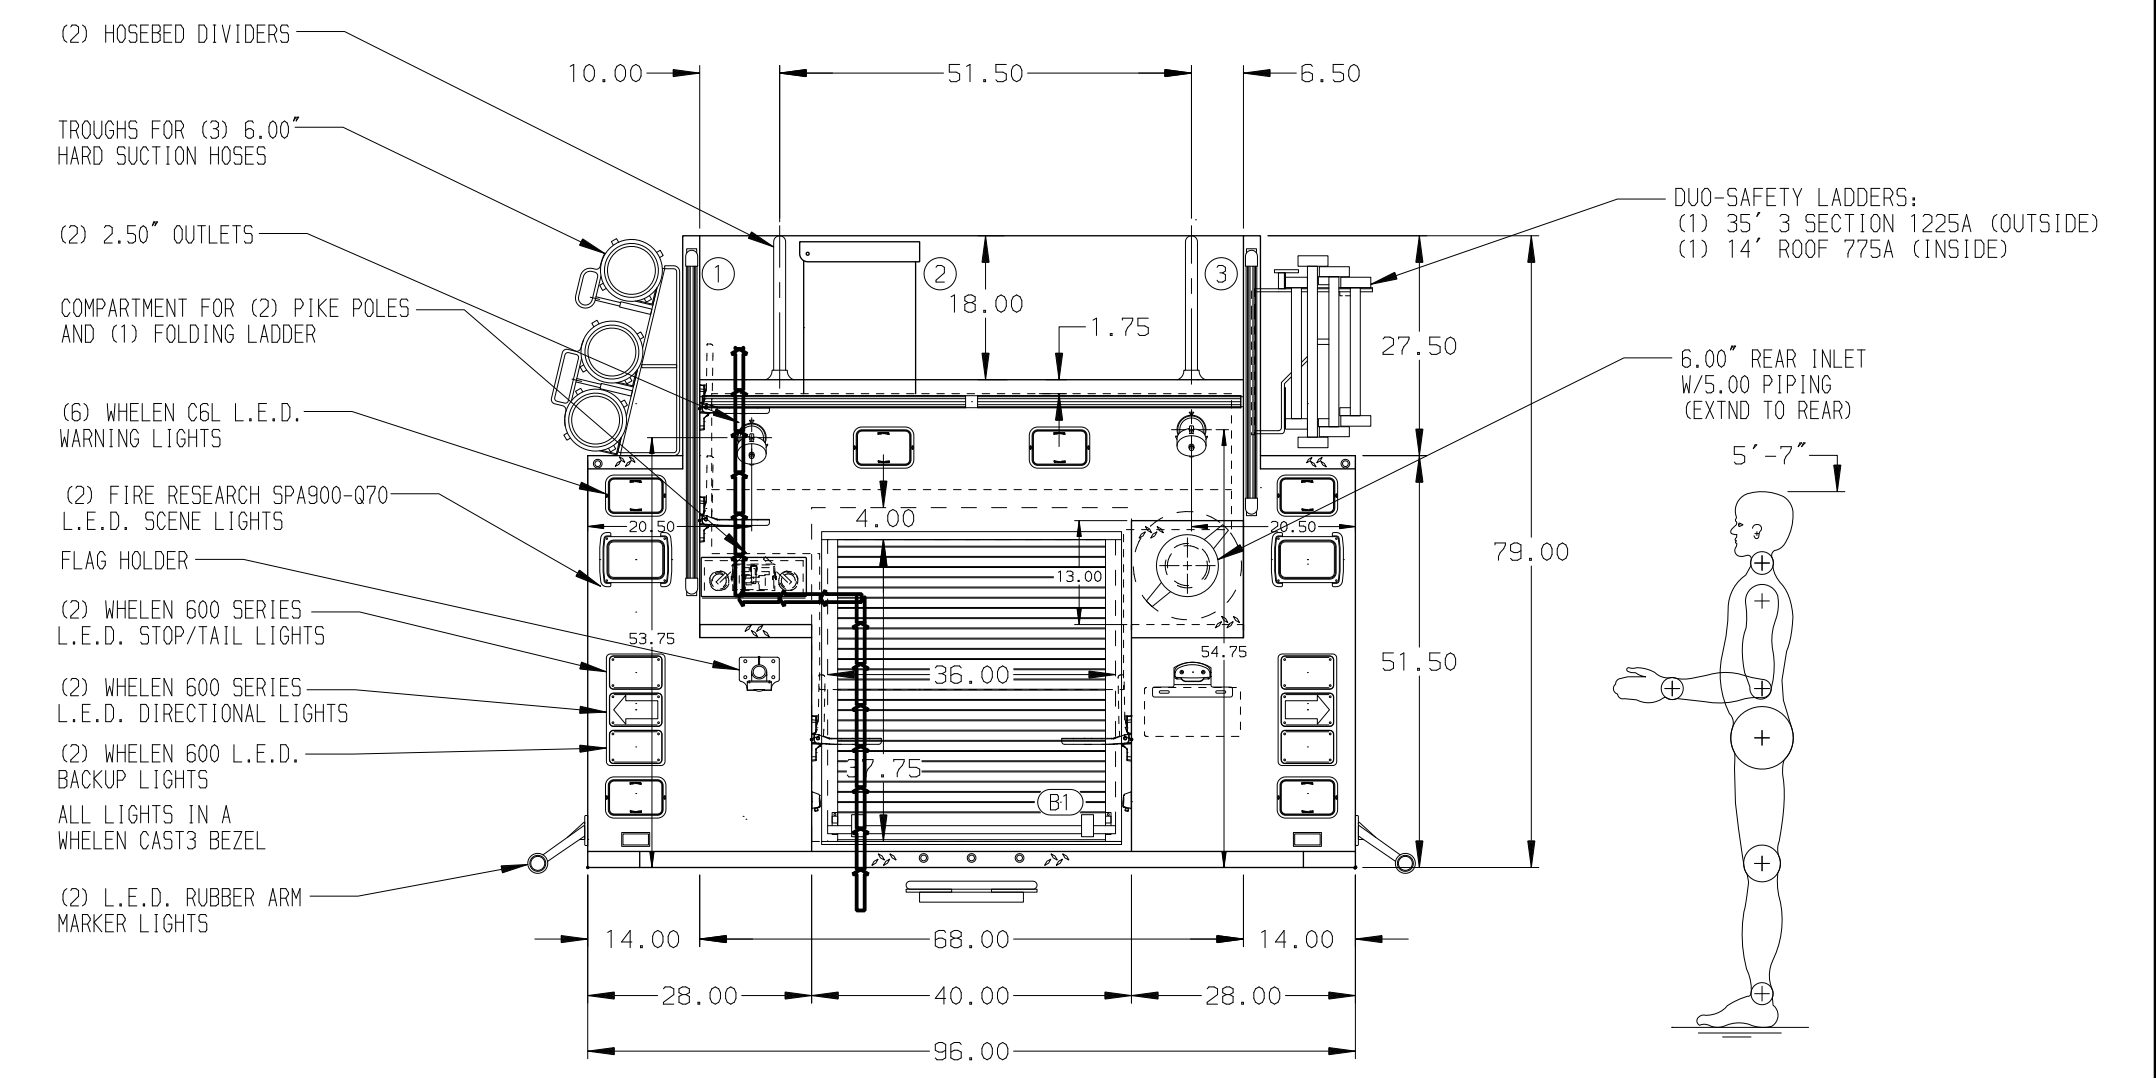


HOSEBED CAPACITIES

- ① - 300' OF 2.50" HOSE
- ② - 1500' OF 5.00" HOSE
- ③ - 100' OF 2.50" HOSE

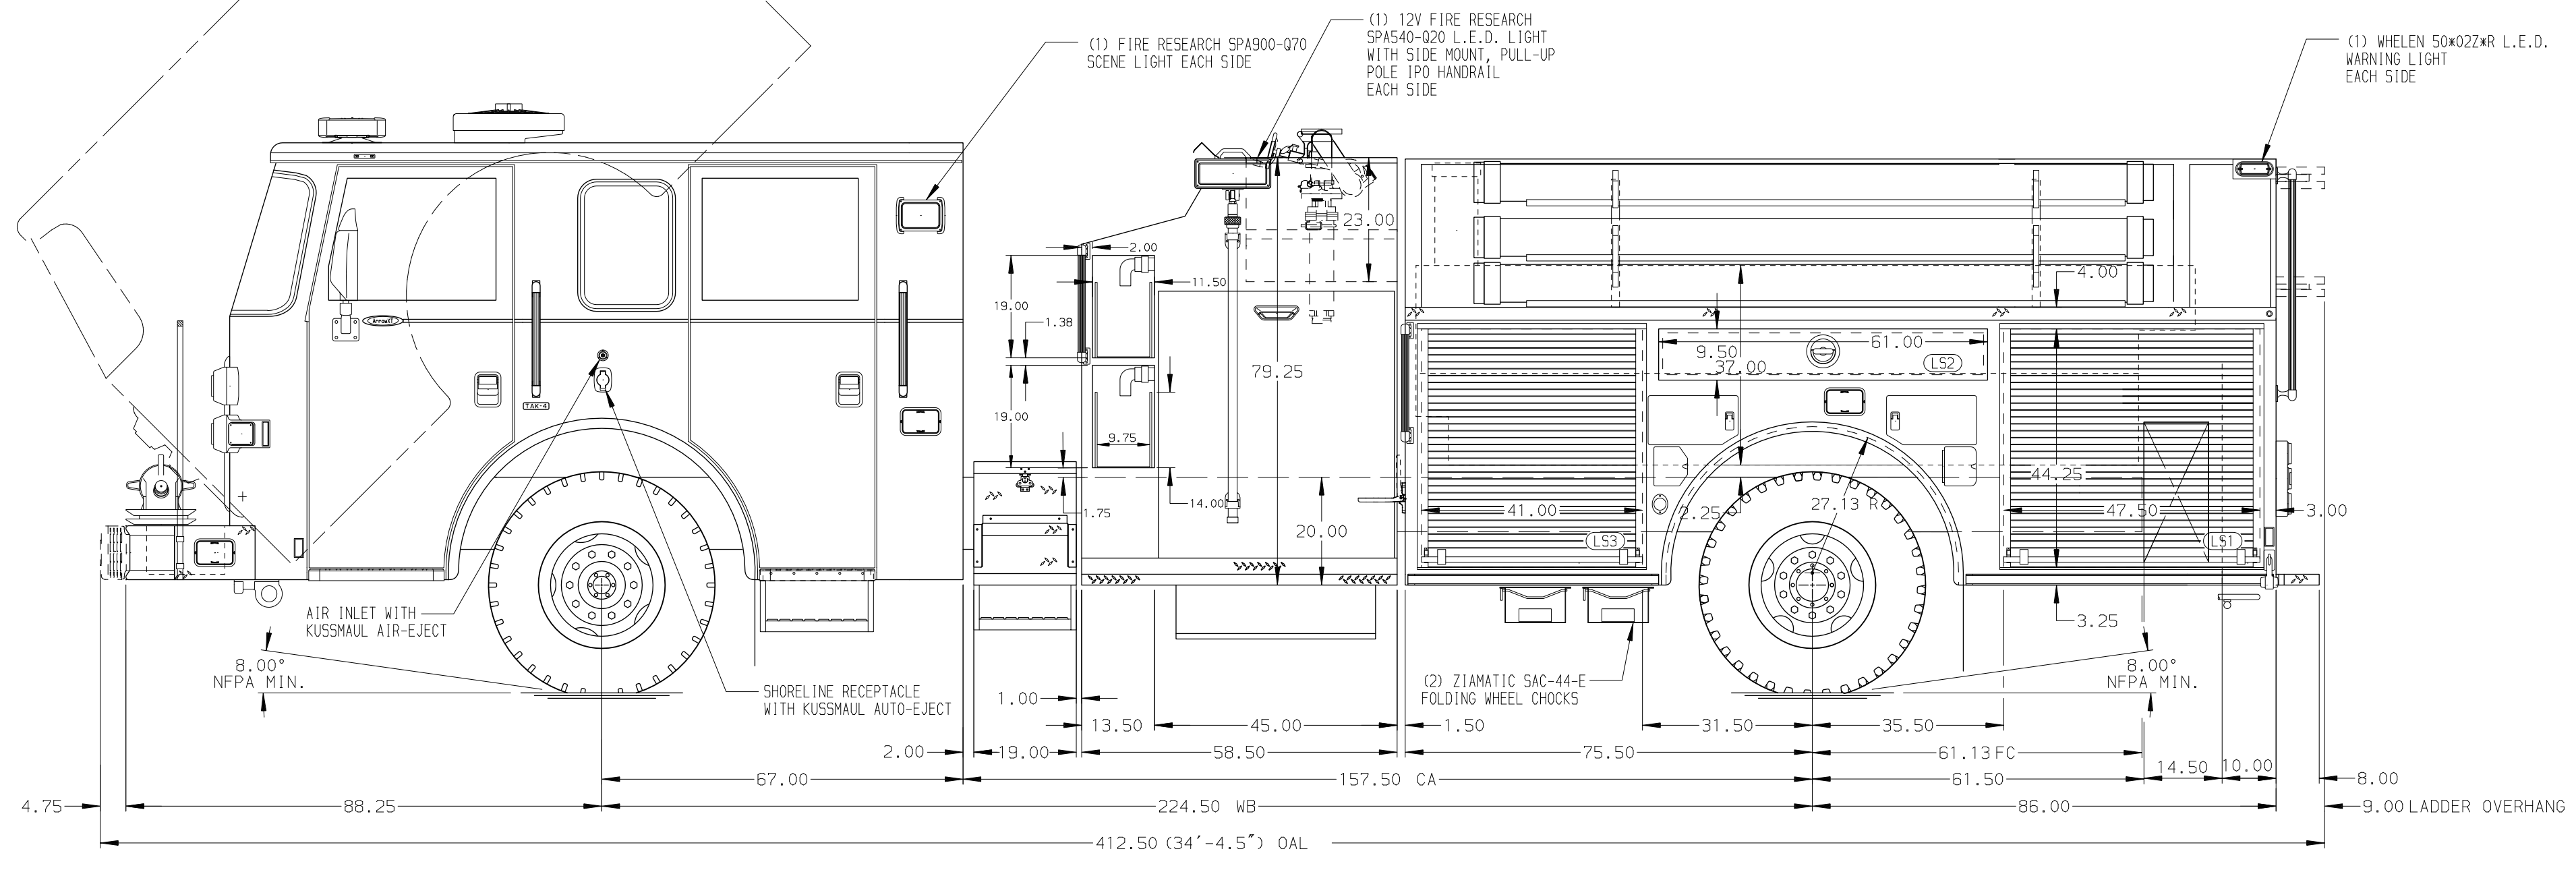

ALUMINUM BODY

MAXIMUM O.A.H. 112"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN COMPARTMENT L53
2. BATTERY CHARGE INDICATOR LOCATED NEAR DRIVER'S SEAT RISER WITH BRACKET
3. DRIP PAN GUARD FOR ROLL-UP DOOR LOCATED L51, L53, R51, R53, B1
4. ONE ADJUSTABLE FULL WIDTH/FULL DEPTH SHELF WITH SPECIAL SIDE HEIGHT IN COMPARTMENTS R51 TO L51 THROUGH B1; TWO IN L53 AND R53
5. COMPARTMENT VENTILATION SYSTEM WITH TIMER
6. 120V 6-PLACE RECEPTACLE STRIP LOCATED IN THE CAB

REV	DATE	BY	CH	ARROW-XT
27	JUN19	MTM	MSA	MAKE
23	MAY19	LME	MSA	PIERCE
28	MAR19	KLE	WKL	MODEL

		JOB NO.	33680
		SCALE	DATE
TITLE	1500-D-1000P 161" PUMPER BODY, (2)SPEEDLAYS W/TRAYS (3)HSH'S DRIVER SIDE, REAR INLET, LDRS PS SIDE SHEET		
FOR	TWIN LAKES FIRE DEPARTMENT TWIN LAKES, WISCONSIN		
DWG NO.	33680AD		
DRAWN BY	LME	CHECKED BY	WKL
SHEET SIZE	D	SHEET NO.	1 OF 1