

PUMPER

BODY

Medium Aluminum 2nd Gen Pumper

CHASSIS

Enforcer Chassis

CHASSIS

AXLE, FRONT, CUSTOM

18,000 Lb Meritor Axle

AXLE, REAR

27,000 Lb Dana Axle

ENGINE

450 HP Cummins L9 Engine

TRANSMISSION

Allison 5th Gen, 3000 EVS P

BUMPER

19" Extended Painted Steel, Underslung

CAB

7010 Enforcer Cab

BODY

WATER TANK

1000 Gallon Poly Water Tank

COMPT, PUMPER, REAR

51.25" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE

152" RollUp Full Height Front & Rear FDLER

COMPT, PUMPER, RIGHT SIDE

152" RollUp Full Height Front & Rear FDLER

FIRE SUPPRESSION

PUMPHOUSE

45" Control Zone Top Mount

PUMP

1500 GPM Waterous CSU

CROSSLAYS, 1.50"

1.50" Crosslays Not Required

CROSSLAYS, 2.50"

2.50" Crosslay Not Required

SPEEDLAYS

(2) 1.50" W/Troy Std. Capacity

GENERATOR


Generator Not Required

Foam System

Foam System Not Required

Foam Cell

Foam Cell Not Required

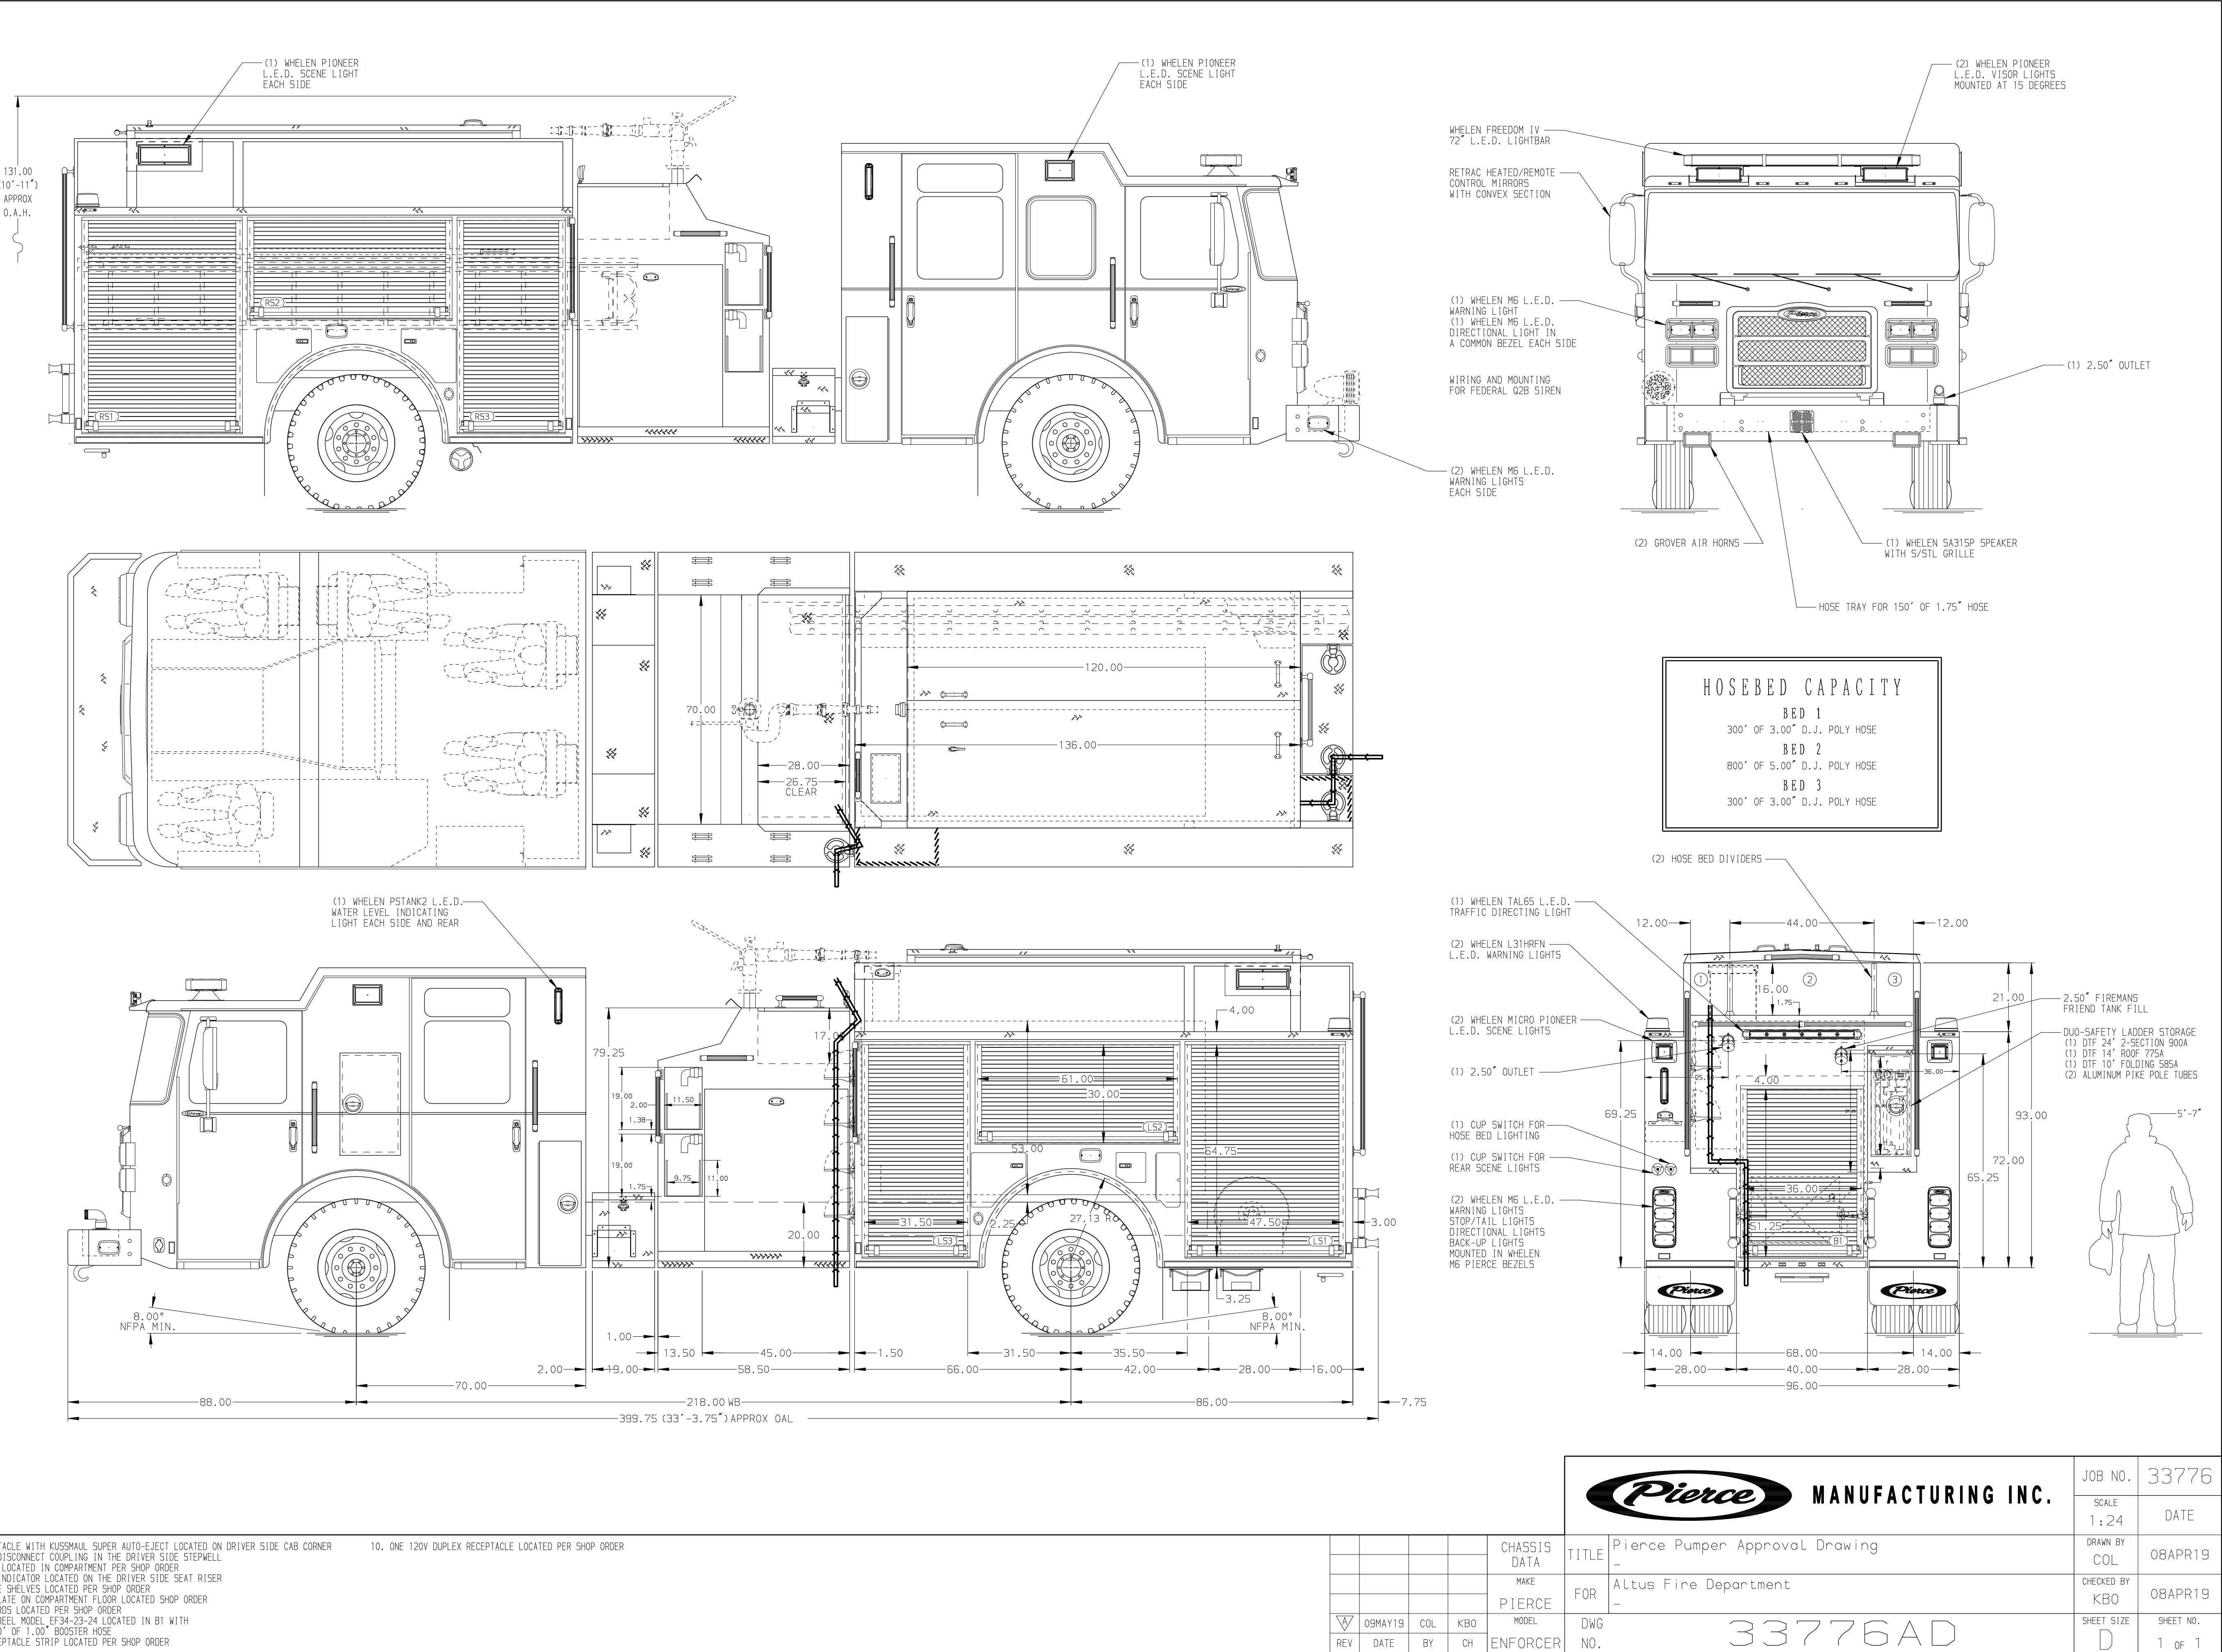

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE CAB CORNER

2. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPIWELL

3. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER

4. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER

5. EIGHT ADJUSTABLE SHELVES LOCATED PER SHOP ORDER

6. ALUMINUM TREADPLATE ON COMPARTMENT FLOOR LOCATED SHOP ORDER

7. ALUMINUM FEGBOARDS LOCATED PER SHOP ORDER

8. HANNAY BOOSTER REEL MODEL EF34-23-24 LOCATED IN B1 WITH CAPACITY FOR 200' OF 1.00" BOOSTER HOSE

9. ONE 6-PLACE RECEPTACLE STRIP LOCATED PER SHOP ORDER
10. ONE 120V DUPLEX RECEPTACLE LOCATED PER SHOP ORDER

					CHASSIS DATA
					MAKE
					PIERCE
					MODEL
					ENFORCER
REV	DATE	BY	CH		

 MANUFACTURING INC.	JOB NO.	33776
	SCALE	DATE
	DRAWN BY	08APR19
	CHECKED BY	08APR19
TITLE	Pierce Pumper Approval Drawing	
	FOR	Altus Fire Department
DWG NO.	33776AD	