

PUMPER BODY
Medium Aluminum 2nd Gen Pumper

CHASSIS
Enforcer Chassis

CHASSIS AXLE, FRONT, CUSTOM
18,000 Lb TAK-4 Axle

AXLE, REAR
24,000 Lb Dana Axle

ENGINE
450 HP Cummins L9 Engine

TRANSMISSION
Allison 5th Gen, 3000 EVS P

BUMPER
22" Extended Painted Steel

CAB
7010 Enforcer Cab

BODY WATER TANK
750 Gallon Poly Water Tank

COMPT, PUMPER, REAR
37.75" FF RollUp Rear Compt

COMPT, PUMPER, LEFT SIDE
152" RollUp Full Height Front & Rear FDLR

COMPT, PUMPER, RIGHT SIDE
152" RollUp Full Height Front & Rear FDLR

FIRE SUPPRESSION PUMPHOUSE
42" Control Zone Top Mount

PUMP
2000 GPM Waterous CSU

CROSSLAYS, 1.50"
1.50" Crosslays Not Required

CROSSLAYS, 2.50"
2.50" Crosslay Not Required

SPEEDLAYS
(2) 1.50" W/Tray Std. Capacity

GENERATOR
Generator Not Required


Foam System
Husky 3 Single Agent Foam System

Foam Cell
30 Gallon Foam Cell, Not Reduced Water

Side Roll and Frontal Impact Protection

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH BLUE SEA SURE EJECT LOCATED ON DRIVER SIDE OF THE CREW CAB
- AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
- BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE OF THE CREW CAB
- SIX ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
- FIVE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER SHOP ORDER
- ONE SWING-OUT TOOLBOARD LOCATED PER SHOP ORDER
- PAC TRAC INSTALLED ON COMPARTMENT WALL PER SHOP ORDER
- FOUR 120V DUPLEX RECEPTACLES LOCATED PER SHOP ORDER

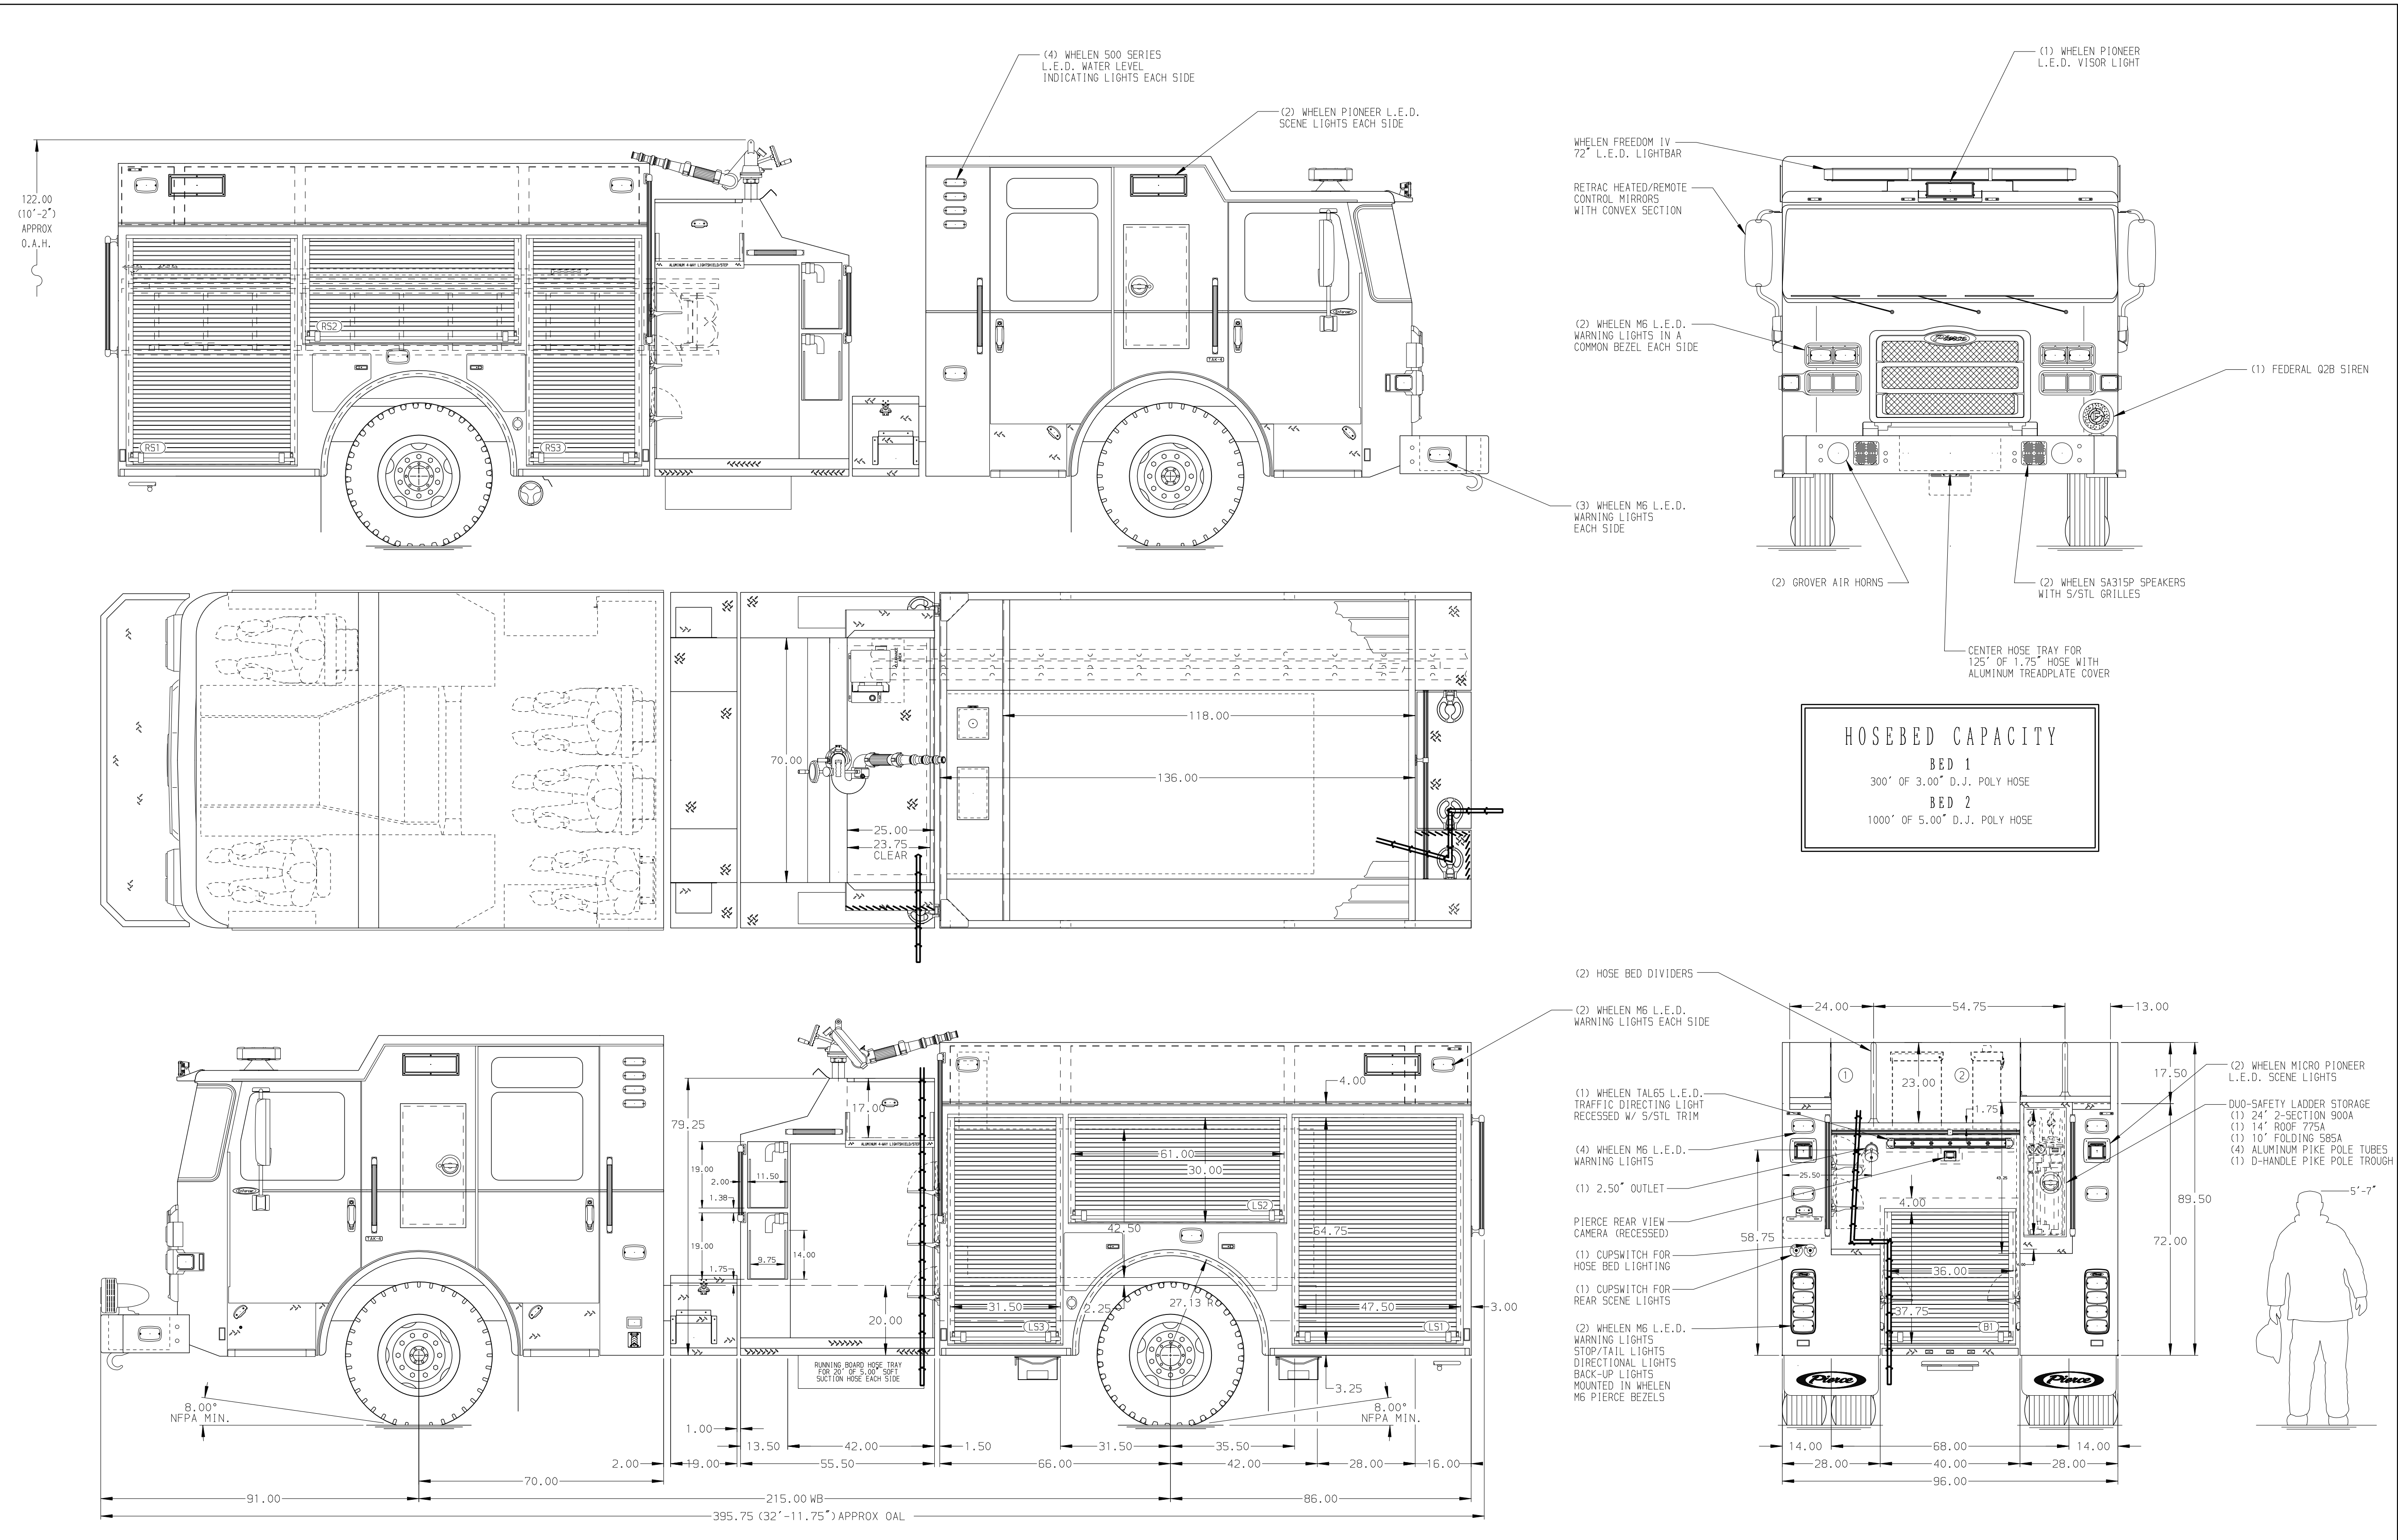

		Pierce MANUFACTURING INC.		JOB NO.	34238
				SCALE	DATE
				1:24	
				DRAWN BY	13AUG19
				COL	
				CHECKED BY	16AUG19
				KBO	
				SHEET SIZE	SHEET NO.
				D	1 OF 1
REV	DATE	BY	CH	DWG NO. 34238AD	
020CT19		COL	KBO	Pierce Pumper Approval Drawing	
04SEP19		COL	KBO	Windcrest Volunteer Fire Department	
				TITL	
				CHASSIS DATA	
				MAKE	
				PIERCE	
				MODEL	
				ENFORCER	