


- HOSEBED CAPACITIES**
- ① 200' OF 2.50" D.J. POLY HOSE
 - ② 1000' OF 5.00" D.J. POLY HOSE
 - ③ 600' OF 2.50" D.J. POLY HOSE

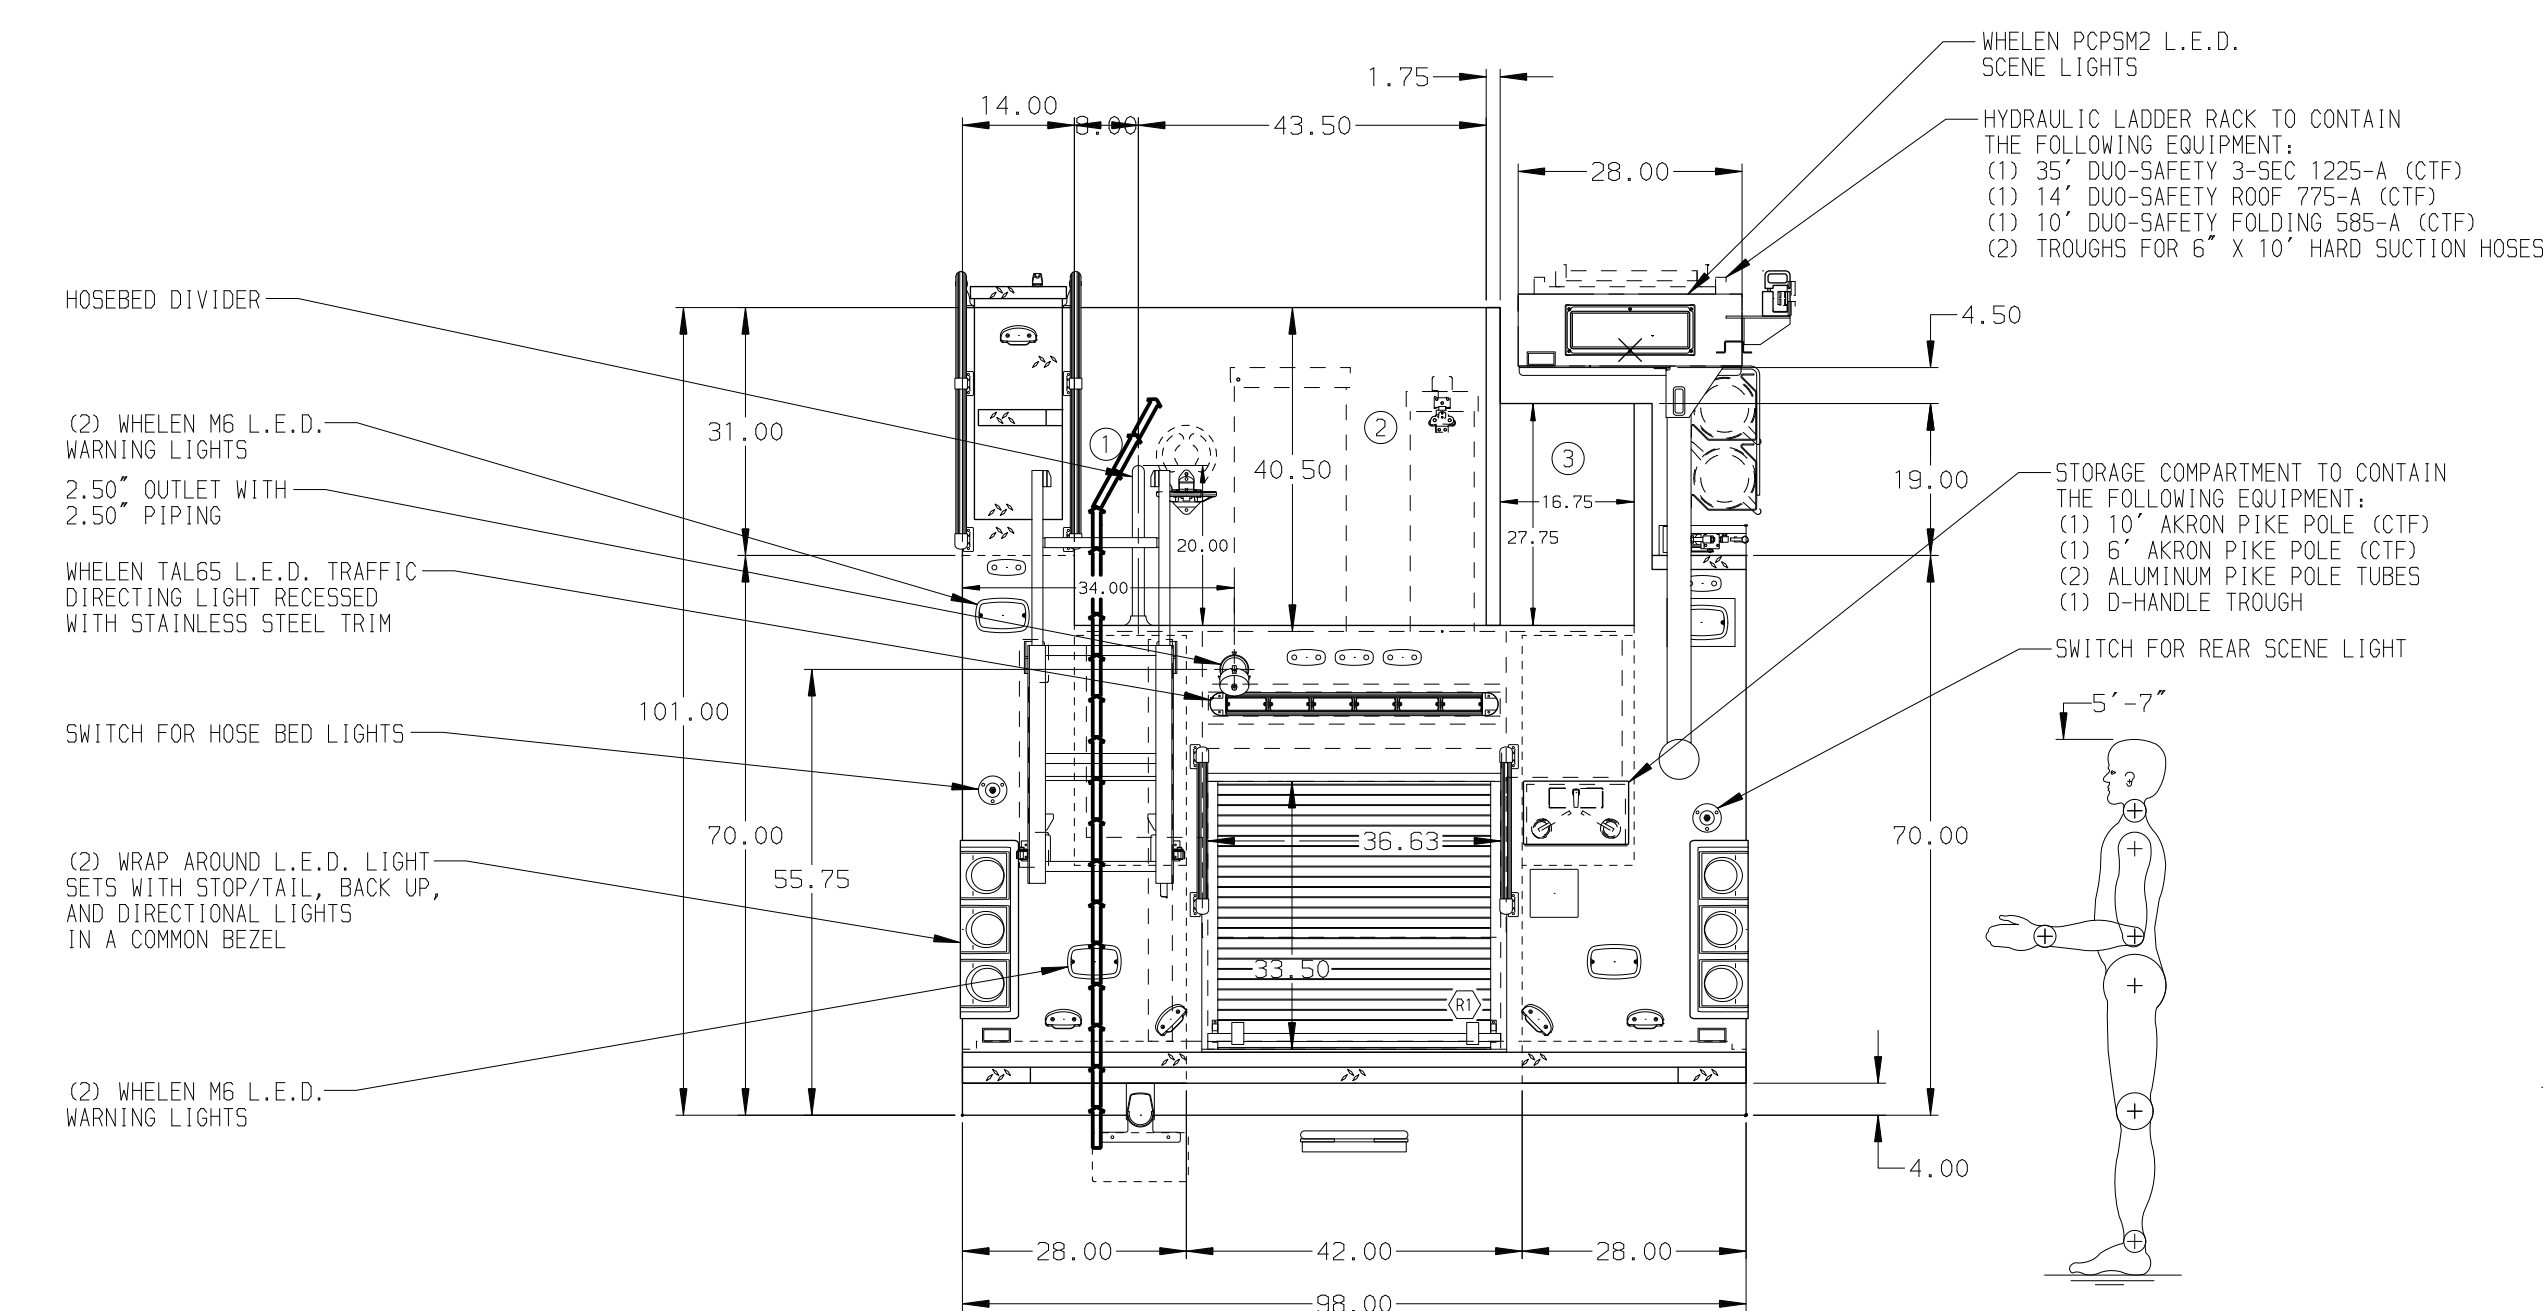

ALUMINUM BODY MAXIMUM O.A.H. 132.00" SIDE ROLL & FRONTAL IMPACT PROTECTION

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

1. FOAMPRO 2001 SINGLE AGENT FOAM SYSTEM
2. BATTERY CHARGER LOCATED IN PUMP PLUMBING AREA
3. BATTERY CHARGER INDICATOR DISPLAY THROUGH WINDOW BEHIND DRIVER SEAT
4. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF WITH 2" SIDES IN COMPARTMENT-D1,D2,D3,P1,TWO IN P3
5. ONE FLOOR MOUNTED SLIDE-OUT TRAY WITH 2" SIDES IN COMPARTMENT-D1,D3,P1
6. ONE SWING-OUT TOOLBOARD WITH PCBBOARD PATTERN IN COMPARTMENT-P2,P3
7. VERTICAL PARTITION IN COMPARTMENT-P3

REV	DATE	BY	CH	CHASSIS DATA
28FEB17	BST	MSA	MAKE	
17JAN17	BST	PJP	PIERCE	
18NOV16	BST	CDU	MODEL ENFORCER STEP FRAME	

		JOB NO.	30761
		SCALE	DATE
TITLE	1500-D-750P W/25 GAL. FOAM CELL,DELUGE,(3) X-LAYS 177" PUC PUMPER BODY,HYDRAULIC LADDER RACK	DRAWN BY	BST
FOR	GENESSEE FIRE PROTECTION DISTRICT GOLDEN, CO	CHECKED BY	CDU
DWG NO.	30761AD	SHEET SIZE	D
		SHEET NO.	1 OF 1